



GROWING TOGETHER

INDUSTRIAL & CONSTRUCTION TIRES

TECHNICAL DATA BOOK



ABBREVIATION LEGEND

Abbreviation	Description
PR	Ply Rating
LI/SS	Load Index / Speed Symbol
Rec.	Recommended
Alt.	Alternative
S.W.	Section Width
O.D.	Overall Diameter
SLR	Static Load Radius
RC	Rolling Circumference
LR	Load Range
LLV	Low Load Variation
HLV	High Load Variation
LT	Low Torque
HT	High Torque
Cyc.	Cyclic

INDUSTRIAL & CONSTRUCTION TIRES

TECHNICAL DATA BOOK



INDEX

BKT INDUSTRIAL & CONSTRUCTION RANGE

4 - 9

FORKLIFT

FL 252	15 - 16
LIFTMAX LM 81	17
MAGLIFT	18 - 25
MP 590	26
PL 801	27 - 31
POWER TRAX HD	32 - 36
SNOW GRIP	37
SUPER TRAX HD	38

BACKHOE LOADER

AT 603	39 - 40
AT 621	41 - 43
AT 625	44
BK 6060	44
CON STAR	45
EM 937	46 - 47
MULTIMAX MP 522	48 - 50
RT 747 AGRO INDUSTRIAL	51
TR 459	52 - 53
TR 463	54
XL GRIP	55

COMPACT DUMPER

AT 603	56 - 57
FLOTATION TR 675	58 - 59

COMPACT LOADER

AT 603	60 - 61
AT 621	62 - 64
AT 625	65
CON STAR	66
MP 570	67
MP 590	68
MP 600	69
MULTIMAX MP 522	70 - 72
RT 747 AGRO INDUSTRIAL	73
SNOW TRAC (A)	74

LOADER

EARTHMAX SR 25	75
EARTHMAX SR 31	75
EM 936	76
EM 936 LOADER SPECIAL	76
EM 937	77 - 78
GR 288	79
LOADER GRIP	80
ROCK GRIP	81
BK-LOADER 53	82
SNOW TRAC (B)	83
XL GRIP	84 - 85

COMPACTOR

PAC MASTER	86 - 87
PAC MASTER PLUS	88
TR 387	89 - 90
TR 390	91
TR 391	92

INDUSTRIAL & CONSTRUCTION TIRES

TECHNICAL DATA BOOK

EXCAVATOR

EM 934	93
EM 936	94
EM 938	95
FLOTATION TR 678	96
MP 570	97

GRADER

EARTHMAX SR 22	98
EARTHMAX SR 25	98
EM 936	99
GR 288	100
SUPER GRADER	101
TRAC GRADER +	102
XL GRIP	103

SKID STEER

GIANT TRAX	104
JUMBO TRAX HD	105
POWER TRAX HD (SS)	106
SKID POWER	107
SKID POWER (CHEVRON)	108
SKID POWER HD	109 - 111
SKID POWER SK	112
SKID POWER PLUS	112
SNOW TRAC (A)	113
SURE TRAX HD	114

TELEHANDLER

AS 504	115 - 123
CON STAR	124
EM 936	125
EM 936 LOADER SPECIAL	126
GRIP STAR	126
LIFT STAR	127
MP 567	128 - 130
MP 590	131
MP 600	132
MULTIMAX MP 522	133 - 135
MULTIMAX MP 527	136 - 138
RT 747 AGRO INDUSTRIAL	139
TR 461	140

LIGHT TRUCK

LT TR 182	141
TUF LUG	141

LOW PLATFORM

IT 400	142
LP 450	143

MOBILE HOME

MH TR 182	144
ST 195	144
LT TR 182	145

IMPLEMENT MACHINERY

AS 504	146 - 154
--------	-----------

TRAILER

BK 6060	155
CON TRAILER	155
FLOTATION TR 675	156 - 157
INDUSTRIAL RIB F3	158
MT 612	159
MULTI RIB	159
RIB F3	160
SAND KING	160
SAND MASTER	161
SAND STAR	161
ST 180	162 - 163
SUPER SAND	164
TR 387	165
TR 390	166
TR 391	167
TUF LUG	167

UNIVERSAL VEHICLE MULTIPURPOSE

EARTHMAX SR 33	168
MP 567	169 - 171
MP 585	172
MULTIMAX MP 513	173
MULTIMAX MP 540	174

MOBILE CRANE

AIROMAX AM 27	175
AIROMAX AM 543	176
CRANE SPECIAL	177

BKT PORT RANGE

178

RTG CRANE

XL GRIP (IND-3)	179
-----------------	-----

CONTAINER HANDLER

ROCK GRIP	180
SM 54	181
SM 55	182

EMPTY CONTAINER HANDLER

POWER TRAX HD	183
POWER TRAX HD SMOOTH	184
EM 937	185
ROCK GRIP	186
XL GRIP	187

REACH STACKER

CONTAINER KING	188
PORT KING PLUS	188
PORT KING CLASSIC	189
PORTMAX PM 90	189
SM 54	190
SM 55	191

STRADDLE CARRIER

PORTMAX PM 93	192
---------------	-----

TERMINAL TRACTOR

PORTMAX PT 93	193
---------------	-----

TIRE CARE & SAFETY




READING YOUR TIRE	194 - 195
LOAD INDEX / SPEED SYMBOL	196 - 197
TIRE LIFE & FAILURE	198
HANDLING & STORAGE	198 - 199

BKT INDUSTRIAL & CONSTRUCTION RANGE






FORKLIFT

 (B)	 (R)	 (B)	 (B)	 (B)
FL 252	LIFTMAX LM 81	MAGLIFT SOLID TIRE	MP 590	PL 801

FORKLIFT

 (B)	 (B)	 (B)
POWER TRAX HD	SNOW GRIP	SUPER TRAX HD

BACKHOE LOADER

 (B)	 (B)	 (B)	 (B)	 (B)
AT 603	AT 621	AT 625	BK 6060	CON STAR


BACKHOE LOADER

 (B)	 (R)	 (R)	 (B)	 (B)
EM 937	MULTIMAX MP 522	RT 747 AGRO INDUSTRIAL	TR 459	TR 463

BACKHOE LOADER

 (B)
XL GRIP

COMPACT DUMPER

 (B)	 (B)
AT 603	FLOTATION TR 675

B = Bias R = Radial

COMPACT LOADER



AT 603



AT 621



AT 625



CON STAR



MP 570

COMPACT LOADER



MP 590



MP 600



MULTIMAX MP 522



RT 747 AGRO INDUSTRIAL



SNOW TRAC (A)

LOADER



EARTHMAX SR 25



EARTHMAX SR 31



EM 936



EM 936 LOADER SPECIAL



EM 937

LOADER



GR 288



LOADER GRIP



ROCK GRIP



BK-LOADER 53



SNOW TRAC (B)

LOADER



XL GRIP

COMPACTOR



PAC MASTER



PAC MASTER PLUS



TR 387

B = Bias

R = Radial

BKT INDUSTRIAL & CONSTRUCTION RANGE

COMPACTOR	 (B)	 (B)	EXCAVATOR	 (B)	 (B)	 (B)
	TR 390	TR 391		EM 934	EM 936	EM 938
EXCAVATOR	 (B)	 (B)	GRADER	 (R)	 (R)	
	FLOTATION TR 678	MP 570		EARTHMAX SR 22	EARTHMAX SR 25	
GRADER	 (B)	 (B)	 (B)	 (B)	 (B)	
	EM 936	GR 288	SUPER GRADER	TRAC GRADER +	XL GRIP	
SKID STEER	 (B)	 (B)	 (B)	 (B)	 (B)	
	GIANT TRAX	JUMBO TRAX HD	POWER TRAX HD	SKID POWER	SKID POWER (CHEVRON)	
SKID STEER	 (B)	 (B)	 (B)	 (B)	 (B)	
	SKID POWER HD	SKID POWER SK	SKID POWER PLUS	SNOW TRAC (A)	SURE TRAX HD	

B = Bias R = Radial

TELEHANDLER



AS 504



CON STAR



EM 936



EM 936 LOADER SPECIAL



GRIP STAR

TELEHANDLER



LIFT STAR



MP 567



MP 590



MP 600



MULTIMAX MP 522

TELEHANDLER



MULTIMAX MP 527



RT 747 AGRO INDUSTRIAL



TR 461

LIGHT TRUCK



LT TR 182



TUF LUG

LOW PLATFORM



IT 400



LP 450

MOBILE HOME



MH TR 182



ST 195



LT TR 182

IMPLEMENT MACHINERY



AS 504

B = Bias

R = Radial

BKT INDUSTRIAL & CONSTRUCTION RANGE

TRAILER						
	BK 6060	CON TRAILER	FLOTATION TR 675	INDUSTRIAL RIB F3	MT 612	
	TRAILER					
		MULTI RIB	RIB F3	SAND KING	SAND MASTER	SAND STAR
		TRAILER				
ST 180			SUPER SAND	TR 387	TR 390	TR 391
TRAILER						
	TUF LUG					
UNIVERSAL MULTIPURPOSE VEHICLE						
	EARTHMAX SR 33	MP 567	MP 585	MULTIMAX MP 513	MULTIMAX MP 540	

B = Bias

R = Radial

MOBILE CRANE








AIROMAX AM 27 AIROMAX AM 543 CRANE SPECIAL

RTG CRANE








XL GRIP

CONTAINER HANDLER






ROCK GRIP SM 54 SM 55

EMPTY CONTAINER HANDLER

POWER TRAX HD POWER TRAX HD SMOOTH EM 937 ROCK GRIP XL GRIP (ECH)

REACH STACKER

CONTAINER KING PORT KING PLUS PORT KING CLASSIC PORTMAX PM 90 SM 54

REACH STACKER



SM 55

STRADDLE CARRIER



PORTMAX PM 93

TERMINAL TRACTOR



PORTMAX PT 93

B = Bias R = Radial

INDUSTRIAL & CONSTRUCTION RADIAL TIRES



RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE
9	6.00 R 9	LIFTMAX LM 81	17				
10	6.50 R 10	LIFTMAX LM 81	17				
12	7.00 R 12	LIFTMAX LM 81	17				
	250/75 R 12	LIFTMAX LM 81	17				
15	7.00 R 15	LIFTMAX LM 81	17				
	7.50 R 15	LIFTMAX LM 81	17				
	225 / 75 R 15	LIFTMAX LM 81	17				
	8.25 R 15	LIFTMAX LM 81	17				
15.5	280/60 - 15.5	FLOTATION TR 678	96				
17	425/55 R 17	MULTIMAX MP 513	173				
18	280/80 R 18 IND	MULTIMAX MP 522	48/70/133				
	340/80 R 18 IND	MULTIMAX MP 522	48/70/133	MULTIMAX MP 527	136		
	365/70 R 18	MULTIMAX MP 513	173				
	360/70 R 18 IND	MULTIMAX MP 527	136				
20	10.00 R 20	LIFTMAX LM 81	17				
	11.00 R 20	LIFTMAX LM 81	17				
	12.00 R 20	LIFTMAX LM 81	17				
	335/80 R 20	MULTIMAX MP 540	174				
	340/80 R 20 IND	MULTIMAX MP 522	48/70/133	MULTIMAX MP 527	136		
	375/70 R 20	MULTIMAX MP 513	173				
	380/75 R 20 IND	MULTIMAX MP 522	48/70/133				
	395/85 R 20	EARTHMAX SR 33	168				
	400/70 R 20 IND	MULTIMAX MP 522	48/70/133	MULTIMAX MP 527	136		
	405/70 R 20	MULTIMAX MP 513	173	BK-LOADER 53	82		
22.5	600/40 - 22.5	FLOTATION TR 678	96				
	650/45 - 22.5	FLOTATION TR 678	96				
	280/75 R 22.5	PORTMAX PT 93	193				
24	14.00 R 24	EARTHMAX SR 25	75/98				
	14.00 R 24	EARTHMAX SR 22	98				
	385/95 R 24	AIROMAX AM 27	175				
	400/70 R 24 IND	MULTIMAX MP 522	49/71/134	MULTIMAX MP 527	136		
	400/80 R 24 IND	MULTIMAX MP 522	49/71/134	MULTIMAX MP 527	137		
	440/80 R 24 IND	MULTIMAX MP 522	49/71/134	MULTIMAX MP 527	137		
	460/70 R 24 IND	MULTIMAX MP 522	49/71/134	MULTIMAX MP 527	137		
	460/70 R 24	RT 747 AGRO INDUSTRIAL	51/73/139				
	500/70 R 24	RT 747 AGRO INDUSTRIAL	51/73/139				
	495/70 R 24	MULTIMAX MP 513	173				
	500/70 R 24 IND	MULTIMAX MP 522	49/71/134	MULTIMAX MP 527	137		
540/70 R 24 IND	MULTIMAX MP 522	50/72/135					
25	385/95 R 25	AIROMAX AM 27	175				
	16.00 R 25	PORTMAX PM 93	192				
	445/95 R 25	AIROMAX AM 543	176	AIROMAX AM 27	175		
	17.5 R 25	EARTHMAX SR 22	98				
	505/95 R 25	AIROMAX AM 27	175				
	18.00R 25	PORTMAX PM 90	189				
	20.5 R 25	EARTHMAX SR 22	98				
	23.5 R 25	EARTHMAX SR 31	75				
	26.5 R 25	EARTHMAX SR 31	75				
29.5 R 25	EARTHMAX SR 31	75					
26	480/80 R 26 IND	MULTIMAX MP 522	50/72/135				
	480/80 R 26	MULTIMAX MP 527	137				
28	440/80 R 28 IND	MULTIMAX MP 522	50/72/135	MULTIMAX MP 527	138		

INDUSTRIAL & CONSTRUCTION BIAS TIRES



RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE
5	23 X 5	PL 801	27										
8	4.00 - 8	MAGLIFT	18										
	15 X 4.5 - 8	MAGLIFT	18										
	5.00 - 8	MAGLIFT	18	PL 801	27	FL 252	15	POWER TRAX HD	32				
	4.80 - 8	ST 180	162										
	16 X 6 - 8	MAGLIFT	18										
	5.70 - 8	ST 180	162										
	18 X 7 - 8	MAGLIFT	19	PL 801	27	POWER TRAX HD	32						
	18 X 8.5 - 8	SKID POWER HD	109										
9	140/55 - 9	MAGLIFT	20										
	6.00 - 9	MAGLIFT	19	PL 801	28	ST 180	162	ST 195	144	POWER TRAX HD	32	FL 252	15
	21 X 8 - 9	MAGLIFT	19	PL 801	28								
10	5.00 - 10	ST 180	162										
	6.50 - 10	MAGLIFT	20	FL 252	15	PL 801	28	POWER TRAX HD	32	SUPER TRAX HD	38		
	200/50 - 10	MAGLIFT	21										
	18 X 8.5 - 10	SKID POWER HD	109										
	23 X 9 - 10	MAGLIFT	21	POWER TRAX HD	33								
12	7.00 - 12	MAGLIFT	21	PL 801	28	FL 252	15	SUPER TRAX HD	38	POWER TRAX HD	33		
	23 X 8.50 - 12	SKID POWER HD	109										
	23 X 10 - 12	MAGLIFT	22										
	27 X 10 - 12	MAGLIFT	22	POWER TRAX HD	33	SKID POWER HD	109						
	26 X 12 - 12	SKID POWER HD	109										
13	ST 165/80 D 13	ST 180	163										
	ST 175/80 D 13	ST 180	163										
	9.00 - 13	SAND STAR	161										
14	ST 205/65 D 14	ST 180	163										
	ST 195/75 D 14	ST 180	163										
	ST 205/75 D 14	ST 180	163										
	ST 215/75 D 14	ST 180	163										
	25 X 8.5 - 14	SKID POWER	197										
14.5	8 - 14.5	LT TR 182	141/145	MH TR 182	144	LP 450	143						
	9 - 14.5	LP 450	143										
15	5.50 - 15	PL 801	29										
	7.00 - 15	MAGLIFT	22	PL 801	29	SKID POWER (CHEVRON)	108						
	7.50 - 15	MAGLIFT	23	IT 400	142	PL 801	29	PAC MASTER	86	PAC MASTER PLUS	88		
	ST 205/65 D 15	ST 180	163										
	ST 205/75 D 15	ST 180	163										
	205/60 - 15	PAC MASTER	86										
	8.25 - 15	MAGLIFT	24	PL 801	30	IT 400	142	FL 252	16	POWER TRAX HD	34		
	8.15 - 15	PL 801	30	MAGLIFT	23	FL 252	16	POWER TRAX HD	34				
	250 - 15	MAGLIFT	24	PL 801	30	POWER TRAX HD	34						
	ST 225/75 D 15	ST 180	163										
	27 X 8.50 - 15	SKID POWER HD	110										
	8.5/90 - 15 K	PAC MASTER	86										
	9.5/65 - 15	PAC MASTER	86										
	300 - 15	MAGLIFT	25	PL 801	31	POWER TRAX HD	35						
	27 X 10.5 - 15	SKID POWER HD	110										
	10.00 - 15	IT 400	142										
	9.00 - 15	SUPER SAND	164										
	11L - 15 SL	INDUSTRIAL RIB F3	158										
	10.00L - 15	POWER TRAX HD	34										
	28 X 12.5 - 15	MAGLIFT	24	POWER TRAX HD	34								
33 X 12.5 - 15	AT 621	41/62											
31 X 15.5 - 15	SKID POWER HD	110											

INDUSTRIAL & CONSTRUCTION BIAS TIRES



RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE
15.3	10.0/75 - 15.3	MP 567	128/169	AS 504	115/146												
	27 X 10 - 15.3	AS 504	117/148														
	11.5/80 - 15.3	AS 504	116/147	MP 567	128/169												
16	6.00 - 16	AS 504	117/148														
	7.50 - 16	AS 504	118/149	SNOW GRIP	37	SAND KING	160	SAND MASTER	161	TUF LUG	141/167	PAC MASTER	86				
	9.0/70 - 16	AS 504	118/149														
	9.00 - 16	RIB F3	160	BK 6060	44	SUPER SAND	164	AT 621	41/62	XL GRIP	55						
	270/75 - 16	AS 504	118/149														
	10.5/80 - 16	PAC MASTER	86														
	11L - 16 SL	INDUSTRIAL RIB F3	158														
	12.5/70 - 16	AT 621	41/62	SNOW TRAC (A)	74/113												
	11.00 - 16	MULTI RIB	159														
16.5	10 - 16.5	SKID POWER	107	SKID POWER HD	110	JUMBO TRAX HD	105	SURE TRAX HD	114	GIAN TRAX	104	SKID POWER SK	112	SNOW TRAC (A)	74/113	SKID POWER PLUS	112
	12 - 16.5	SKID POWER	107	SNOW TRAC (A)	74/113	SKID POWER SK	112	GIAN TRAX	104	POWER TRAX HD	106	SKID POWER HD	110	JUMBO TRAX HD	105	SURE TRAX HD	114
	31.5 X 13 - 16.5	SKID POWER HD	110														
	33 X 15.5 - 16.5	SKID POWER HD	110														
17	15.0/55 - 17	AS 504	119/150														
	420/55 - 17	AS 504	119/150														
	19.0/45 - 17	AS 504	119/150														
17.5	14 - 17.5	SKID POWER HD	111	SKID POWER	107												
18	7.50 - 18	AS 504	120/151														
	10.5 - 18	MP 567	128/169	MP 600	69/132												
	10.5/80 - 18	AS 504	120/151	AT 603	39/56/60												
	12.5/80 - 18	TR 461	140	XL GRIP	55	AS 504	120/151	AT 603	39/56/60	AT 621	41/62						
	12.5 - 18	MP 570	67/97	MP 600	69/132	MP 567	128/169										
	340/80 - 18	CON STAR	45/66/124														
	15.5/60 - 18	SNOW TRAC (A)	74/113	AT 621	42/63												
15.5/70 - 18	AT 621	42/63															
19.5	15 - 19.5	SKID POWER HD	111														
	18 - 19.5	MP 567	129/170														
20	6.50 - 20	MP 585	172														
	7.50 - 20	AS 504	121/152														
	8.25 - 20	EM 936	94/125														
	9.00 - 20	EM 936	94/125	EM 938	95	PAC MASTER PLUS	88	PAC MASTER	86								
	10.5 - 20	MP 567	129/170	MP 585	172												
	10.00 - 20	EM 936	94/125	EM 934	93	POWER TRAX HD	35	XL GRIP	55	CON TRAILER	155						
	11.00 - 20	PAC MASTER	87	EM 936	94/99/125												
	12.00 - 20	POWER TRAX HD	36/183	POWER TRAX HD SMOOTH	184												
	12.5 - 20	MP 567	129/170	MP 570	67/97	MP 585	172										
	340/80 - 20	CON STAR	45/66/124														
	14.5 - 20	MP 567	130/171	MP 570	67/97												
	14/70 - 20	PAC MASTER	87														
	380/75 - 20	CON STAR	45/66/124														
	14.00 - 20	SUPER SAND	164	MT 612	159												
	400/70 - 20	AT 621	42/63	CON STAR	45/66/124	MP 600	69/132	AS 504	121/152	TR 459	52						
	16.0/70 - 20	EM 936	76/94/99	EM 936 LOADER SPECIAL	76/126	MP 567	130/171	XL GRIP (L3)	84	AS 504	121/152	MT 612	159				
	16.00 - 20	SUPER SAND	164														
42 X 17 - 20	AT 621	42/63															
17.5/65 - 20	SNOW TRAC (A)	74/113	AT 621	42/63													
22.5	18 - 22.5	MP 590	26/68/131														
	500/60 - 22.5	FLOTATION TR 675	58/156														
	550/45 - 22.5	FLOTATION TR 675	58/156														
	550/60 - 22.5	FLOTATION TR 675	59/157														
	280/75 R 22.5	PORTMAX PT 93	193														

RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE
24	12.00 - 24	ROCK GRIP (IND-4)	186	XL GRIP	55	XL GRIP (IND-3)	187								
	13.00 - 24	SUPER GRADER	101	TRAC GRADER +	102	XL GRIP (G3)	103								
	14.00 - 24	SUPER GRADER	101	TRAC GRADER +	102	XL GRIP (G3)	103	CRANE SPECIAL	177	EM 937 (E-3/L-3)	46/77	EM 937 (E-3) IND	185	ROCK GRIP IND4	186
	14.9 - 24	XL GRIP	55	TR 459	52	AT 625	44/65	TR 391	92/167						
	15.5/80 - 24	AS 504	122/153	GRIP STAR	126										
	400/80 - 24	AS 504	123/154	CON STAR	45/66/124										
	400/70 - 24	CON STAR	45/66/124	MP 600	69/132										
	16.0/70 - 24	EM 936	76/94/99/125												
	16.5/85 - 24	AS 504	122/153												
	16.9 - 24	SNOW TRAC (B)	83	TR 459	52	TR 461	140	TR 463	54	AT 621	43/64				
	16.00 - 24	SUPER GRADER	101	XL GRIP (G3)	103										
	17.5L - 24	TR 459	52	AT 621	43/64										
	440/80 - 24	CON STAR	45/66/124												
	460/70 - 24	CON STAR	45/66/124												
	18.4 - 24	TR 459	52	SNOW TRAC (B)	83										
	19.5L - 24	AT 621	43/64	TR 459	52	TR 461	140								
	500/70 - 24	CON STAR	45/66/124												
	21L - 24	TR 459	52	TR 461	140										
	20 - 24	EM 936	76/94/99/125												
	25	14.00 - 25	EM 937 (E-3/L-3)	47/78	LOADER GRIP	80	ROCK GRIP (L4)	81							
15.5 - 25		GR 288	79/100	SNOW TRAC (B)	83	XL GRIP (L3)	84								
16.00 - 25		SM 54 (L-4S)	181/190	CRANE SPECIAL	177	XL GRIP (IND-3)	179 /187	ROCK GRIP (IND-4)	180						
17.5 - 25		XL GRIP (L3)	84	LOADER GRIP	80	GR 288	79/100	SNOW TRAC (B)	83						
18.00 - 25		CRANE SPECIAL	177	ROCK GRIP (IND-4)	180	XL GRIP (IND-3)	79 /187	SM 55 (L5S) IND-5	182/191	CONTAINER KING	188	PORT KING PLUS	188		
		SM 54 (L-4S)	181/190	PORT KING CLASSIC	189	PORTMAX PM 90	189								
20.5 - 25		GR 288	79/100	XL GRIP (L3)	84	SNOW TRAC (B)	83	LOADER GRIP	80						
21.00 - 25		XL GRIP IND3 (RTG)	179												
23.5 - 25		GR 288	79/100	LOADER GRIP	80	XL GRIP (L3)	85	SNOW TRAC (B)	83						
26.5 - 25		LOADER GRIP	80	XL GRIP (L3)	85										
29.5 - 25	LOADER GRIP	80	XL GRIP (L3)	85											
26	18.4 - 26	TR 459	53	TR 387	89	AT 621	43/64								
	480/80 - 26	CON STAR	45/66/124												
	23.1 - 26	TR 387	89	TR 390	91/166										
	28L - 26	TR 390	91/166												
28	12.4 - 28	TR 387	89/165												
	370/75 - 28	LIFT STAR	127												
	400/75 - 28	LIFT STAR	127												
	16.9 - 28	TR 387	89/165	TR 459	53	TR 461	140	AT 621	43/64	AT 625	44/65	TR 463	54	XL GRIP	55
	440/80 - 28	CON STAR	45/66/124												
	18.4 - 28	TR 459	53												
21L - 28	TR 459	53													
29	24.00 - 29	XL GRIP (IND-3)	179												
30	16.9 - 30	TR 387	90/165	TR 459	53	AT 621	43/64								
	18.4 - 30	TR 387	90/165												
32	24.5 - 32	TR 387	90/165												
33	18.00 - 33	ROCK GRIP IND4	180	SM 54 (L-4S)	181/190										
35	21.00-35	XL GRIP (IND-3)	179												
	24.00 - 35	XL GRIP (IND-3)	179												

BKTI

11/10/10 11/10/10



**MAIN APPLICATION:
FORKLIFT**



FL 252

FL 252 is a tire suitable for hay harvesting applications with rotor rakes/tedders as well as for logistic operations using forklifts. This tire provides excellent durability while the specific tread pattern ensures maximum stability during lifting operations.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)		
									Rec./Flange Height	Alt./Flange Height	↓		
8"	5.00 - 8	TT	8	-	STD	138	480	-	-	3.00 D	3.25 I	bar	8.30
												km/h	
												25 LOAD WHEEL	1235
												25 STEER WHEEL	950
												10 OTHER VEHICLES	1235
												25 OTHER VEHICLES	950
												STATIC SIDE LOADER	1435
8"	5.00 - 8	TT	10	-	STD	138	480	-	-	3.00 D	3.25 I	bar	10.00
												km/h	
												25 LOAD WHEEL	1415
												25 STEER WHEEL	1090
												10 OTHER VEHICLES	1415
												25 OTHER VEHICLES	1090
												STATIC SIDE LOADER	1645
9"	6.00 - 9	TT	10	-	STD	170	550	-	-	4.00 E	-	bar	8.50
												km/h	
												25 LOAD WHEEL	1715
												25 STEER WHEEL	1320
												10 OTHER VEHICLES	1715
												25 OTHER VEHICLES	1320
												STATIC SIDE LOADER	1995
10"	6.50 - 10	TT	10	-	STD	185	605	-	-	5.00 F	5.50 F	bar	7.80
												km/h	
												25 LOAD WHEEL	1950
												25 STEER WHEEL	1500
												10 OTHER VEHICLES	1950
												25 OTHER VEHICLES	1500
												STATIC SIDE LOADER	2265
12"	7.00 - 12	TT	14	-	STD	190	688	-	-	5.00 S	-	bar	9.00
												km/h	
												25 LOAD WHEEL	2755
												25 STEER WHEEL	2120
												10 OTHER VEHICLES	2755
												25 OTHER VEHICLES	2120
												STATIC SIDE LOADER	3200

STD: Standard



**MAIN APPLICATION:
FORKLIFT**



FL 252

FL 252 is a tire suitable for hay harvesting applications with rotor rakes/tedders as well as for logistic operations using forklifts. This tire provides excellent durability while the specific tread pattern ensures maximum stability during lifting operations.



STABILITY



DURABILITY



CUT & CHIP
RESISTANCE

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
									Rec./Flange Height	Alt./Flange Height		
15" 8.15 - 15 (28 X 9 - 15)	TT	14	-	STD	220	720	-	-	7.00	7 BD	bar	
											10.00	
											25 LOAD WHEEL	3900
											25 STEER WHEEL	3000
											10 OTHER VEHICLES	3900
											25 OTHER VEHICLES	3000
STATIC SIDE LOADER	4530											
8.25 - 15	TT	14	-	STD	240	855	-	-	6.50	7.0	bar	
											8.00	
											25 LOAD WHEEL	4225
											25 STEER WHEEL	3250
											10 OTHER VEHICLES	4225
											25 OTHER VEHICLES	3250
STATIC SIDE LOADER	4910											

STD: Standard



MAIN APPLICATION:
FORKLIFT



LIFTMAX LM 81

LIFTMAX LM 81 has been specially designed for forklift equipment in material handling and industrial applications. This All Steel radial tire with multilayer steel belts offers low rolling resistance, lower vibration, and greater stability as well as increased puncture resistance. The special tread compound provides exceptional cut and chip resistance along with excellent wear resistance on all types of terrain.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 25 KM/H		
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)	
9"	6.00 R 9	-	-	121 A5	STD	160	540	-	-	4.00	4.00 E	10	1450
10"	6.50 R 10	TL	-	128 A5	STD	178	590	-	-	5.00 F; 5.50 F	-	10	1800
12"	7.00 R 12	TL	-	136 A5	STD	195	675	-	-	5.00 S	-	10	2240
	250 / 75 R 12	TL	-	152 A5	STD	260	680	-	-	8.0	-	10	3550
15"	7.00 R 15	TL	-	143 A5	STD	199	745	-	-	5.50	5.00	10	2725
	7.50 R 15	TL	-	146 A5	STD	212	778	-	-	6.00	6.5	10	3000
	8.25 R 15	TL	-	153 A5	STD	234	836	-	-	6.5	-	10	3650
	225 / 75 R 15 (28 X 9 R 15)	TL	-	149 A5	STD	226	712	-	-	7.00	-	10	3250
20"	10.00 R 20	TL	-	166 A5	STD	275	1066	-	-	7.50	-	10	5300
	11.00 R 20	TL	-	170 A5	STD	286	1082	-	-	8.00	-	10	6000
	12.00 R 20	TL	-	176 A5	STD	314	1134	-	-	8.50	8.0	10	7100

STD: Standard



MAIN APPLICATION:
FORKLIFT



MAGLIFT SOLID TIRE

MAGLIFT has been particularly designed for forklifts. It features high load capacity and outstanding comfort. Its reinforced structure eliminates slippage risks whilst the special bead shape simplifies the mounting operations on the rim. MAGLIFT shows an excellent cut and chip resistance resulting in an extended tire life-cycle. It is also available in a "lip" version.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)		
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	bar	km/h	
8" 4.00 - 8	-	-	-	STD	109	406	-	-	3.00 D - 8	-	bar	-	
											km/h	25 LOAD WHEEL	950
											25 STEER WHEEL	730	
4.00 - 8	-	-	-	LIP	109	406	-	-	3.00 D - 8	-	bar	-	
											km/h	25 LOAD WHEEL	950
											25 STEER WHEEL	730	
4.00 - 8	-	-	-	LIP NM	109	406	-	-	3.00 D - 8	-	bar	-	
											km/h	25 LOAD WHEEL	950
											25 STEER WHEEL	730	
4.00 - 8	-	-	-	STD NM	109	406	-	-	3.00 D - 8	-	bar	-	
											km/h	25 LOAD WHEEL	950
											25 STEER WHEEL	730	
5.00 - 8	-	-	-	STD	120	462	-	-	3.00 D - 8	-	bar	-	
											km/h	25 LOAD WHEEL	1415
											25 STEER WHEEL	1090	
5.00 - 8	-	-	-	LIP	120	462	-	-	3.00 D - 8	-	bar	-	
											km/h	25 LOAD WHEEL	1415
											25 STEER WHEEL	1090	
5.00 - 8	-	-	-	LIP NM	120	462	-	-	3.00 D - 8	-	bar	-	
											km/h	25 LOAD WHEEL	1415
											25 STEER WHEEL	1090	
5.00 - 8	-	-	-	STD NM	120	462	-	-	3.00 D - 8	-	bar	-	
											km/h	25 LOAD WHEEL	1415
											25 STEER WHEEL	1090	
15 X 4.5 - 8 (125/75 - 8)	-	-	-	STD	119	378	-	-	3.00 D - 8	-	bar	-	
											km/h	25 LOAD WHEEL	1040
											25 STEER WHEEL	800	
15 X 4.5 - 8 (125/75 - 8)	-	-	-	LIP	119	378	-	-	3.00 D - 8	-	bar	-	
											km/h	25 LOAD WHEEL	1040
											25 STEER WHEEL	800	
15 X 4.5 - 8 (125/75 - 8)	-	-	-	LIP NM	119	378	-	-	3.00 D - 8	-	bar	-	
											km/h	25 LOAD WHEEL	-
											25 STEER WHEEL	-	
16 X 6 - 8 (150/75 - 8)	-	-	-	STD	139	421	-	-	4.33 R - 8	-	bar	-	
											km/h	25 LOAD WHEEL	1495
											25 STEER WHEEL	1150	

STD: Standard
 STD NM: Standard Non Marking
 LIP: LIP Version
 LIP NM: LIP Non Marking



MAIN APPLICATION:
FORKLIFT



MAGLIFT SOLID TIRE

MAGLIFT has been particularly designed for forklifts. It features high load capacity and outstanding comfort. Its reinforced structure eliminates slippage risks whilst the special bead shape simplifies the mounting operations on the rim. MAGLIFT shows an excellent cut and chip resistance resulting in an extended tire life-cycle. It is also available in a "lip" version.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
									Rec./Flange Height	Alt./Flange Height	↓ bar	
8"	16 X 6 - 8 (150/75 - 8)	-	-	LIP	139	421	-	-	4.33 R - 8	-	bar	-
											km/h	-
											25 LOAD WHEEL	1495
	16 X 6 - 8 (150/75 - 8)	-	-	LIP NM	139	421	-	-	4.33 R - 8	-	bar	-
											km/h	-
											25 LOAD WHEEL	1495
	16 X 6 - 8 (150/75 - 8)	-	-	STD NM	139	421	-	-	4.33 R - 8	-	bar	-
											km/h	-
25 LOAD WHEEL											1495	
18 X 7 - 8 (180/70 - 8)	-	-	STD	153	457	-	-	4.33 R - 8	-	bar	-	
										km/h	-	
										25 LOAD WHEEL	2145	
18 X 7 - 8 (180/70 - 8)	-	-	LIP	153	457	-	-	4.33 R - 8	-	bar	-	
										km/h	-	
										25 LOAD WHEEL	2145	
18 X 7 - 8 (180/70 - 8)	-	-	LIP NM	153	457	-	-	4.33 R - 8	-	bar	-	
										km/h	-	
										25 LOAD WHEEL	2145	
18 X 7 - 8 (180/70 - 8)	-	-	STD NM	153	457	-	-	4.33 R - 8	-	bar	-	
										km/h	-	
										25 LOAD WHEEL	2145	
9"	6.00 - 9	-	-	STD	141	529	-	-	4.00 E - 9	-	bar	-
											km/h	-
											25 LOAD WHEEL	1885
	6.00 - 9	-	-	LIP	141	529	-	-	4.00 E - 9	-	bar	-
											km/h	-
											25 LOAD WHEEL	1885
	6.00 - 9	-	-	LIP NM	141	529	-	-	4.00 E - 9	-	bar	-
											km/h	-
25 LOAD WHEEL											1885	
6.00 - 9	-	-	STD NM	141	529	-	-	4.00 E - 9	-	bar	-	
										km/h	-	
										25 LOAD WHEEL	1885	
21 X 8 - 9 (200/75 - 9)	-	-	STD	189	525	-	-	6.00 E - 9	-	bar	-	
										km/h	-	
										25 LOAD WHEEL	2755	
											25 STEER WHEEL	2120

STD: Standard
 STD NM: Standard Non Marking
 LIP: LIP Version
 LIP NM: LIP Non Marking



MAIN APPLICATION:
FORKLIFT



MAGLIFT SOLID TIRE

MAGLIFT has been particularly designed for forklifts. It features high load capacity and outstanding comfort. Its reinforced structure eliminates slippage risks whilst the special bead shape simplifies the mounting operations on the rim. MAGLIFT shows an excellent cut and chip resistance resulting in an extended tire life-cycle. It is also available in a "lip" version.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)		
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height			
9"	21 X 8 - 9 (200/75 - 9)	-	-	-	LIP	189	525	-	-	6.00 E - 9	-	bar	-
												km/h	-
												25 LOAD WHEEL	2755
	21 X 8 - 9 (200/75 - 9)	-	-	-	STD NM	189	525	-	-	6.00 E - 9	-	bar	-
												km/h	-
												25 LOAD WHEEL	2755
	21 X 8 - 9 (200/75 - 9)	-	-	-	LIP NM	189	525	-	-	6.00 E - 9	-	bar	-
												km/h	-
												25 LOAD WHEEL	2755
	140/55 - 9	-	-	-	STD	132	377	-	-	4.00 E - 9	-	bar	-
												km/h	-
												25 LOAD WHEEL	1170
140/55 - 9	-	-	-	LIP	132	377	-	-	4.00 E - 9	-	bar	-	
											km/h	-	
											25 LOAD WHEEL	1170	
140/55 - 9	-	-	-	STD NM	132	377	-	-	4.00 E - 9	-	bar	-	
											km/h	-	
											25 LOAD WHEEL	1170	
140/55 - 9	-	-	-	LIP NM	132	377	-	-	4.00 E - 9	-	bar	-	
											km/h	-	
											25 LOAD WHEEL	1170	
10"	6.50 - 10	-	-	-	STD	154	575	-	-	5.00 F - 10	-	bar	-
												km/h	-
												25 LOAD WHEEL	2340
	6.50 - 10	-	-	-	LIP	154	575	-	-	5.00 F - 10	-	bar	-
												km/h	-
												25 LOAD WHEEL	2340
	6.50 - 10	-	-	-	LIP NM	154	575	-	-	5.00 F - 10	-	bar	-
												km/h	-
												25 LOAD WHEEL	2340
	6.50 - 10	-	-	-	STD NM	154	575	-	-	5.00 F - 10	-	bar	-
												km/h	-
												25 LOAD WHEEL	2340

STD: Standard
 STD NM: Standard Non Marking
 LIP: LIP Version
 LIP NM: LIP Non Marking



MAIN APPLICATION:
FORKLIFT



MAGLIFT SOLID TIRE

MAGLIFT has been particularly designed for forklifts. It features high load capacity and outstanding comfort. Its reinforced structure eliminates slippage risks whilst the special bead shape simplifies the mounting operations on the rim. MAGLIFT shows an excellent cut and chip resistance resulting in an extended tire life-cycle. It is also available in a "lip" version.



10"

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
									Rec./Flange Height	Alt./Flange Height	bar	kg
23 X 9 - 10 (225/75 - 10)	-	-	-	STD	213	585	-	-	6.50 F - 10	-	bar	-
											km/h	-
											25 LOAD WHEEL	3445
											25 STEER WHEEL	2650
23 X 9 - 10 (225/75 - 10)	-	-	-	LIP	213	585	-	-	6.50 F - 10	-	bar	-
											km/h	-
											25 LOAD WHEEL	3445
											25 STEER WHEEL	2650
23 X 9 - 10 (225/75 - 10)	-	-	-	LIP NM	213	585	-	-	6.50 F - 10	-	bar	-
											km/h	-
											25 LOAD WHEEL	3445
											25 STEER WHEEL	2650
23 X 9 - 10 (225/75 - 10)	-	-	-	STD NM	213	585	-	-	6.50 F - 10	-	bar	-
											km/h	-
											25 LOAD WHEEL	3445
											25 STEER WHEEL	2650
200/50 - 10	-	-	-	STD	193	458	-	-	6.50 F - 10	-	bar	-
											km/h	-
											25 LOAD WHEEL	2470
											25 STEER WHEEL	1900
200/50 - 10	-	-	-	LIP	193	458	-	-	6.50 F - 10	-	bar	-
											km/h	-
											25 LOAD WHEEL	2470
											25 STEER WHEEL	1900
200/50 - 10	-	-	-	STD NM	193	458	-	-	6.50 F - 10	-	bar	-
											km/h	-
											25 LOAD WHEEL	2470
											25 STEER WHEEL	1900
200/50 - 10	-	-	-	LIP NM	193	458	-	-	6.50 F - 10	-	bar	-
											km/h	-
											25 LOAD WHEEL	2470
											25 STEER WHEEL	1900

12"

7.00 - 12	-	-	-	STD	168	658	-	-	5.00 S - 12	-	bar	-
											km/h	-
											25 LOAD WHEEL	2920
											25 STEER WHEEL	2240
7.00 - 12	-	-	-	LIP	168	658	-	-	5.00 S - 12	-	bar	-
											km/h	-
											25 LOAD WHEEL	2920
											25 STEER WHEEL	2240
7.00 - 12	-	-	-	LIP NM	168	658	-	-	5.00 S - 12	-	bar	-
											km/h	-
											25 LOAD WHEEL	2920
											25 STEER WHEEL	2240
7.00 - 12	-	-	-	STD NM	168	658	-	-	5.00 S - 12	-	bar	-
											km/h	-
											25 LOAD WHEEL	2920
											25 STEER WHEEL	2240

STD: Standard
 STD NM: Standard Non Marking
 LIP: LIP Version
 LIP NM: LIP Non Marking



**MAIN APPLICATION:
FORKLIFT**



MAGLIFT SOLID TIRE

MAGLIFT has been particularly designed for forklifts. It features high load capacity and outstanding comfort. Its reinforced structure eliminates slippage risks whilst the special bead shape simplifies the mounting operations on the rim. MAGLIFT shows an excellent cut and chip resistance resulting in an extended tire life-cycle. It is also available in a "lip" version.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)			
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height				
												↓		
												bar		
12"	23 X 10 - 12 (250/60 - 12)	-	-	-	STD	236	584	-	-	8.00 G - 12	-	km/h	-	
													25 LOAD WHEEL	3770
													25 STEER WHEEL	2900
													bar	
													km/h	-
													25 LOAD WHEEL	3770
													25 STEER WHEEL	2900
													bar	
												km/h	-	
												25 LOAD WHEEL	3770	
												25 STEER WHEEL	2900	
												bar		
												km/h	-	
												25 LOAD WHEEL	3770	
												25 STEER WHEEL	2900	
												bar		
												km/h	-	
												25 LOAD WHEEL	3770	
												25 STEER WHEEL	2900	
												bar		
												km/h	-	
												25 LOAD WHEEL	3900	
												25 STEER WHEEL	3000	
												bar		
												km/h	-	
												25 LOAD WHEEL	3900	
												25 STEER WHEEL	3000	
												bar		
												km/h	-	
												25 LOAD WHEEL	3900	
												25 STEER WHEEL	3000	
												bar		
												km/h	-	
												25 LOAD WHEEL	3900	
												25 STEER WHEEL	3000	
15"	7.00 - 15	-	-	-	STD	180	730	-	-	5.5 - 15	-	km/h	-	
													25 LOAD WHEEL	3545
													25 STEER WHEEL	2725
													bar	
													km/h	-
													25 LOAD WHEEL	3545
													25 STEER WHEEL	2725
													bar	
												km/h	-	
												25 LOAD WHEEL	3545	
												25 STEER WHEEL	2725	

STD: Standard
 STD NM: Standard Non Marking
 LIP: LIP Version
 LIP NM: LIP Non Marking



MAIN APPLICATION:
FORKLIFT



MAGLIFT SOLID TIRE

MAGLIFT has been particularly designed for forklifts. It features high load capacity and outstanding comfort. Its reinforced structure eliminates slippage risks whilst the special bead shape simplifies the mounting operations on the rim. MAGLIFT shows an excellent cut and chip resistance resulting in an extended tire life-cycle. It is also available in a "lip" version.



CUT & CHIP RESISTANCE



HIGH LOAD CAPACITY



NO SLIPPAGE



DURABILITY



COMFORT

15"

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
									Rec./Flange Height	Alt./Flange Height		
7.00 - 15	-	-	-	STD NM	180	730	-	-	5.5 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	3545
											25 STEER WHEEL	2725
7.50 - 15	-	-	-	STD	193	756	-	-	5.5 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	3900
											25 STEER WHEEL	3000
7.50 - 15	-	-	-	STD	193	756	-	-	6.0 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	3900
											25 STEER WHEEL	3000
7.50 - 15	-	-	-	LIP	193	756	-	-	5.5 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	3900
											25 STEER WHEEL	3000
7.50 - 15	-	-	-	LIP	193	756	-	-	6.0 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	3900
											25 STEER WHEEL	3000
7.50 - 15	-	-	-	STD NM	193	756	-	-	5.5 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	3900
											25 STEER WHEEL	3000
7.50 - 15	-	-	-	STD NM	193	756	-	-	6.0 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	3900
											25 STEER WHEEL	3000
7.50 - 15	-	-	-	LIP NM	193	756	-	-	6.0 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	3900
											25 STEER WHEEL	3000
7.50 - 15	-	-	-	LIP NM	193	756	-	-	5.5 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	3900
											25 STEER WHEEL	3000
8.15-15/28x9-15 (225/75-15)	-	-	-	STD	218	691	-	-	7.0 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	3445
											25 STEER WHEEL	2650
8.15-15/28x9-15 (225/75-15)	-	-	-	LIP	218	691	-	-	7.0 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	3445
											25 STEER WHEEL	2650

STD: Standard
 STD NM: Standard Non Marking
 LIP: LIP Version
 LIP NM: LIP Non Marking



MAIN APPLICATION:
FORKLIFT



MAGLIFT SOLID TIRE

MAGLIFT has been particularly designed for forklifts. It features high load capacity and outstanding comfort. Its reinforced structure eliminates slippage risks whilst the special bead shape simplifies the mounting operations on the rim. MAGLIFT shows an excellent cut and chip resistance resulting in an extended tire life-cycle. It is also available in a "lip" version.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)	
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height		
15" 8.15-15/28x9-15 (225/75-15)	-	-	-	STD NM	218	691	-	-	7.0 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	3445
8.15-15/28x9-15 (225/75-15)	-	-	-	LIP NM	218	691	-	-	7.0 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	3445
8.25 - 15	-	-	-	STD	207	818	-	-	6.5 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	4750
8.25 - 15	-	-	-	LIP	207	818	-	-	6.5 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	4750
8.25 - 15	-	-	-	STD NM	207	818	-	-	6.5 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	4750
8.25 - 15	-	-	-	LIP NM	207	818	-	-	6.5 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	4750
28 X 12.5 - 15 (355/45 - 15)	-	-	-	STD	295	687	-	-	9.75 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	5690
28 X 12.5 - 15 (355/45 - 15)	-	-	-	LIP	295	687	-	-	9.75 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	5690
250 - 15 (250/70 - 15)	-	-	-	STD	216	718	-	-	7.0 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	4745
250 - 15 (250/70 - 15)	-	-	-	LIP	216	718	-	-	7.0 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	4745
250 - 15 (250/70 - 15)	-	-	-	STD NM	216	718	-	-	7.0 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	4745
250 - 15 (250/70 - 15)	-	-	-	LIP	216	718	-	-	7.0 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	4745

STD: Standard
 STD NM: Standard Non Marking
 LIP: LIP Version
 LIP NM: LIP Non Marking



MAIN APPLICATION:
FORKLIFT



MAGLIFT SOLID TIRE

MAGLIFT has been particularly designed for forklifts. It features high load capacity and outstanding comfort. Its reinforced structure eliminates slippage risks whilst the special bead shape simplifies the mounting operations on the rim. MAGLIFT shows an excellent cut and chip resistance resulting in an extended tire life-cycle. It is also available in a "lip" version.



CUT & CHIP RESISTANCE



HIGH LOAD CAPACITY



NO SLIPPAGE



DURABILITY



COMFORT

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
									Rec./Flange Height	Alt./Flange Height	↓	
15" 250 - 15 (250/70 - 15)	-	-	-	LIP NM	216	718	-	-	7.0 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	4745
											25 STEER WHEEL	3650
300 - 15 (315/70 - 15)	-	-	-	STD	255	820	-	-	8.0 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	5850
											25 STEER WHEEL	4500
300 - 15 (315/70 - 15)	-	-	-	LIP	255	820	-	-	8.0 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	5850
											25 STEER WHEEL	4500
300 - 15 (315/70 - 15)	-	-	-	STD NM	255	820	-	-	8.0 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	5850
											25 STEER WHEEL	4500
300 - 15 (315/70 - 15)	-	-	-	LIP NM	255	820	-	-	8.0 - 15	-	bar	-
											km/h	-
											25 LOAD WHEEL	5850
											25 STEER WHEEL	4500

STD: Standard
 STD NM: Standard Non Marking
 LIP: LIP Version
 LIP NM: LIP Non Marking



**MAIN APPLICATION:
FORKLIFT**



MP 590

MP 590 is an agro-industrial tire suitable for loading operations with compact loaders, telehandlers and forklifts. This tire provides good traction and excellent stability as well as high load capacity to enhance productivity.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)		
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height			
22.5" 18 - 22.5 (445/65 - 22.5)	TL	16	-	STD	480	1190	530	3534	14.0	-	↓		
											bar		5.50
											km/h	4875	
18 - 22.5 (445/65 - 22.5)	TL	20	-	STD	480	1190	530	3534	14.0	-	↓		
											bar		7.50
											km/h	5800	
											30 DW	5450	
											30 DW	6500	

STD: Standard



MAIN APPLICATION:
FORKLIFT



PL 801

PL 801 has been specially designed for hay harvesting applications with rotor rakes/tedders and for logistics operations with forklifts. It features excellent stability as well as high cut and chip resistance. PL 801 ensures an extended tire life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)		
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	bar	kg	
5" 23 X 5 (23 X 5 - 13)	TT	6	-	STD	154	640	-	-	3.75 P			bar	5.30
												km/h	
												25 LOAD WHEEL	1495
												25 STEER WHEEL	1150
												10 OTHER VEHICLES	1495
												25 OTHER VEHICLES	1150
												STATIC SIDE LOADER	1735
8" 5.00 - 8	TT	8	-	STD	135	468	-	-	3.00 D	3.25 I		bar	8.30
												km/h	
												25 LOAD WHEEL	1235
												25 STEER WHEEL	950
												10 OTHER VEHICLES	1235
												25 OTHER VEHICLES	950
												STATIC SIDE LOADER	1435
5.00 - 8	TT	10	-	STD	135	468	-	-	3.00 D	3.25 I		bar	10.00
												km/h	
												25 LOAD WHEEL	1415
												25 STEER WHEEL	1090
												10 OTHER VEHICLES	1415
												25 OTHER VEHICLES	1090
												STATIC SIDE LOADER	1645
18 X 7 - 8 (180/70 - 8)	TT	14	-	STD	173	470	-	-	4.33 R	5.00 F		bar	9.00
												km/h	
												25 LOAD WHEEL	1885
												25 STEER WHEEL	1450
												10 OTHER VEHICLES	1885
												25 OTHER VEHICLES	1450
												STATIC SIDE LOADER	2190
18 X 7 - 8 (180/70 - 8)	TT	16	-	STD	173	470	-	-	4.33 R	5.00 F		bar	10.00
												km/h	
												25 LOAD WHEEL	2145
												25 STEER WHEEL	1650
												10 OTHER VEHICLES	2145
												25 OTHER VEHICLES	1650
												STATIC SIDE LOADER	2490

STD: Standard



MAIN APPLICATION:
FORKLIFT



PL 801

PL 801 has been specially designed for hay harvesting applications with rotor rakes/tedders and for logistics operations with forklifts. It features excellent stability as well as high cut and chip resistance. PL 801 ensures an extended tire life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)		
									Rec./Flange Height	Alt./Flange Height		bar	
9"	6.00 - 9	TT	10	-	STD	157	543	-	-	4.00 E	-	bar	8.50
												km/h	
												25 LOAD WHEEL	1715
												25 STEER WHEEL	1320
												10 OTHER VEHICLES	1715
												25 OTHER VEHICLES	1320
												STATIC SIDE LOADER	1995
6.00 - 9	TT	10	-	SPL	157	543	-	-	4.00 E	-	bar	8.50	
											km/h		
											25 LOAD WHEEL	1715	
											25 STEER WHEEL	1320	
											10 OTHER VEHICLES	1715	
											25 OTHER VEHICLES	1320	
											STATIC SIDE LOADER	1995	
6.00 - 9	TT	12	-	STD	157	543	-	-	4.00 E	-	bar	10.00	
											km/h		
											25 LOAD WHEEL	1885	
											25 STEER WHEEL	1450	
											10 OTHER VEHICLES	1885	
											25 OTHER VEHICLES	1450	
											STATIC SIDE LOADER	2190	
21 X 8 - 9 (200/75 - 9)	TT	14	-	STD	200	535	-	-	6.00 E	7.00 E	bar	9.00	
											km/h		
											25 LOAD WHEEL	2535	
											25 STEER WHEEL	1950	
											10 OTHER VEHICLES	2535	
											25 OTHER VEHICLES	1950	
											STATIC SIDE LOADER	2945	
21 X 8 - 9 (200/75 - 9)	TT	16	-	STD	200	535	-	-	6.00 E	7.00 E	bar	10.00	
											km/h		
											25 LOAD WHEEL	2755	
											25 STEER WHEEL	2120	
											10 OTHER VEHICLES	2755	
											25 OTHER VEHICLES	2120	
											STATIC SIDE LOADER	3200	
10"	6.50 - 10	TT	10	-	STD	185	595	-	-	5.00 F	5.50 F	bar	7.80
												km/h	
												25 LOAD WHEEL	1950
												25 STEER WHEEL	1500
												10 OTHER VEHICLES	1950
												25 OTHER VEHICLES	1500
												STATIC SIDE LOADER	2265
12"	7.00 - 12	TT	12	-	STD	189	692	-	-	5.00 S	-	bar	8.50
												km/h	
												25 LOAD WHEEL	2680
												25 STEER WHEEL	2060
												10 OTHER VEHICLES	2680
												25 OTHER VEHICLES	2060
												STATIC SIDE LOADER	3110

STD: Standard
SPL: Special



MAIN APPLICATION:
FORKLIFT



PL 801

PL 801 has been specially designed for hay harvesting applications with rotor rakes/tedders and for logistics operations with forklifts. It features excellent stability as well as high cut and chip resistance. PL 801 ensures an extended tire life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)			
									Rec./Flange Height	Alt./Flange Height	↓			
12"	7.00 - 12	TT	14	-	STD	189	692	-	-	5.00 S	-	bar		
												km/h	9.00	
												25 LOAD WHEEL	2755	
												25 STEER WHEEL	2120	
												10 OTHER VEHICLES	2755	
												25 OTHER VEHICLES	2120	
												STATIC SIDE LOADER	3200	
15"	5.50 - 15	TT	8	-	STD	157	670	-	-	5.50	4.50 E DT; 4.50 SDC	bar		
												km/h	7.30	
												25 LOAD WHEEL	1950	
												25 STEER WHEEL	1445	
												10 OTHER VEHICLES	1950	
												25 OTHER VEHICLES	1445	
												STATIC SIDE LOADER	2180	
7.00 - 15 (29 X 8 - 15)	TT	12	-	STD	200	750	-	-	5.5	4.33 R; 5.0	bar			
											km/h	8.30		
											25 LOAD WHEEL	3070		
											25 STEER WHEEL	2360		
											10 OTHER VEHICLES	3070		
											25 OTHER VEHICLES	2360		
											STATIC SIDE LOADER	3565		
7.00 - 15 (30 X 8 - 15)	TT	12	-	STD	206	775	-	-	6.0	5.50 BD; 5.5	bar			
											km/h	8.60	9.00	
											25 LOAD WHEEL	2835	-	
											25 STEER WHEEL	2395	-	
											10 OTHER VEHICLES	2395	-	
											25 OTHER VEHICLES	1760	-	
											STATIC SIDE LOADER	-	3865	
7.00 - 15 (30 X 8 - 15)	TT	14	-	STD	206	775	-	-	6.0	5.50 BD; 5.5	bar			
											km/h	10.00	10.30	
											25 LOAD WHEEL	3095	-	
											25 STEER WHEEL	2615	-	
											10 OTHER VEHICLES	2615	-	
											25 OTHER VEHICLES	1920	-	
											STATIC SIDE LOADER	-	4225	
7.50 - 15	TT	12	-	STD	220	785	-	-	6.0	6.00 S; 6.5	bar			
											km/h	8.00		
											25 LOAD WHEEL	3445		
											25 STEER WHEEL	2650		
											10 OTHER VEHICLES	3445		
											25 OTHER VEHICLES	2650		
											STATIC SIDE LOADER	4000		
7.50 - 15 (7.50 - 15 [32 OD]*)	TT	14	-	STD	220	814	-	-	6.0	6.00 S; 6.5	bar			
											km/h	9.20	9.70	
											25 LOAD WHEEL	3430	-	
											25 STEER WHEEL	2900	-	
											10 OTHER VEHICLES	2900	-	
											25 OTHER VEHICLES	2130	-	
											STATIC SIDE LOADER	-	4685	

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
FORKLIFT



PL 801

PL 801 has been specially designed for hay harvesting applications with rotor rakes/tedders and for logistics operations with forklifts. It features excellent stability as well as high cut and chip resistance. PL 801 ensures an extended tire life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
					Rec./Flange Height	Alt./Flange Height	↓					
15" 7.50 - 15	TT	14	-	STD	220	785	-	-	6.0	6.00 S; 6.5	bar	9.30
											km/h	
											25 LOAD WHEEL	3640
											25 STEER WHEEL	2800
											10 OTHER VEHICLES	3640
											25 OTHER VEHICLES	2800
											STATIC SIDE LOADER	4230
8.15 - 15 (28 X 9 - 15)	TT	12	-	STD	215	720	-	-	7.0	7.00 BD	bar	8.30
											km/h	
											25 LOAD WHEEL	3445
											25 STEER WHEEL	2650
											10 OTHER VEHICLES	3445
											25 OTHER VEHICLES	2650
											STATIC SIDE LOADER	4000
8.15 - 15 (28 X 9 - 15)	TT	14	-	STD	215	720	-	-	7.0	7.00 BD	bar	10.00
											km/h	
											25 LOAD WHEEL	3900
											25 STEER WHEEL	3000
											10 OTHER VEHICLES	3900
											25 OTHER VEHICLES	3000
											STATIC SIDE LOADER	4530
8.25 - 15	TT	12	-	STD	236	854	-	-	6.5	6.0; 7.0	bar	7.00
											km/h	
											25 LOAD WHEEL	3900
											25 STEER WHEEL	3000
											10 OTHER VEHICLES	3900
											25 OTHER VEHICLES	3000
											STATIC SIDE LOADER	4530
8.25 - 15	TT	14	-	STD	236	854	-	-	6.5	6.0; 7.0	bar	8.00
											km/h	
											25 LOAD WHEEL	4225
											25 STEER WHEEL	3250
											10 OTHER VEHICLES	4225
											25 OTHER VEHICLES	3250
											STATIC SIDE LOADER	4910
250 - 15 (250/70 - 15)	TT	16	-	STD	235	745	-	-	7.50 BD	7.0; 7.5	bar	8.30
											km/h	
											25 LOAD WHEEL	4355
											25 STEER WHEEL	3350
											10 OTHER VEHICLES	4355
											25 OTHER VEHICLES	3350
											STATIC SIDE LOADER	5060

STD: Standard



**MAIN APPLICATION:
FORKLIFT**



PL 801

PL 801 has been specially designed for hay harvesting applications with rotor rakes/tedders and for logistics operations with forklifts. It features excellent stability as well as high cut and chip resistance. PL 801 ensures an extended tire life-cycle.



CUT & CHIP RESISTANCE



DURABILITY



STABILITY

SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)	
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	↓	
15" 250 - 15 (250/70 - 15)	TT	20	-	STD	235	745	-	-	7.50 BD	7.0; 7.5	10.00	
											bar	
											km/h	
											25 LOAD WHEEL	5040
											25 STEER WHEEL	3875
											10 OTHER VEHICLES	5040
25 OTHER VEHICLES	3875											
STATIC SIDE LOADER	5850											
300 - 15 (315/70 - 15)	TT	18	-	STD	295	840	-	-	8.00 BD	8.0	7.50	
											bar	
											km/h	
											25 LOAD WHEEL	5850
											25 STEER WHEEL	4500
											10 OTHER VEHICLES	5850
25 OTHER VEHICLES	4500											
STATIC SIDE LOADER	6795											

STD: Standard



MAIN APPLICATION:
FORKLIFT



POWER TRAX HD

POWER TRAX HD is a premium bias-ply tire that is specially designed for forklift equipment in industrial applications. The deep tread, the extra thick sidewall and the tough casing provide exceptional durability minimizing the risk of punctures and accidental damages. The tire features excellent cut, chip and tear resistance suitable for rough and hard concrete surface. The specially designed rim guard ensures protection against flats and wheel damages in the rim flange area.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)		
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	bar	kg	
8"	5.00 - 8	TT	10	-	STD	145	480	-	-	3.00 D	3.25 I	bar	10.00
												km/h	25 LOAD WHEEL
8"	18 X 7 - 8 (180/70 - 8)	TT	16	-	STD	173	470	-	-	4.33 R	5.00 F	bar	10.00
												km/h	25 LOAD WHEEL
9"	6.00 - 9	TT	-	-	STD	166	543	-	-	4.00 E	-	bar	8.50
												km/h	25 LOAD WHEEL
10"	6.50 - 10	TT	10	-	STD	193	595	278	1774	5.00 F	5.50 F	bar	7.80
												km/h	25 LOAD WHEEL
10"	6.50 - 10	TT	12	-	STD	193	595	278	1774	5.00 F	5.50 F	bar	9.00
												km/h	25 LOAD WHEEL
10"	6.50 - 10	TT	14	-	STD	193	595	278	1774	5.00 F	5.50 F	bar	10.00
												km/h	25 LOAD WHEEL

STD: Standard



MAIN APPLICATION:
FORKLIFT



POWER TRAX HD

POWER TRAX HD is a premium bias-ply tire that is specially designed for forklift equipment in industrial applications. The deep tread, the extra thick sidewall and the tough casing provide exceptional durability minimizing the risk of punctures and accidental damages. The tire features excellent cut, chip and tear resistance suitable for rough and hard concrete surface. The specially designed rim guard ensures protection against flats and wheel damages in the rim flange area.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)	
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	bar	kg
10" 23 X 9 - 10 (225/75 - 10)	TT	18	-	STD	235	590	-	-	6.50 F	-	bar	9.00
											km/h	
											25 LOAD WHEEL	3160
											25 STEER WHEEL	2430
											10 OTHER VEHICLES	3160
											25 OTHER VEHICLES	2430
STATIC SIDE LOADER	3670											
23 X 9 - 10 (225/75 - 10)	TT	20	-	STD	235	590	-	-	6.50 F	-	bar	10.00
											km/h	
											25 LOAD WHEEL	3445
											25 STEER WHEEL	2650
											10 OTHER VEHICLES	3445
											25 OTHER VEHICLES	2650
STATIC SIDE LOADER	4000											
12" 7.00 - 12	TT	14	-	STD	205	675	-	-	5.00 S	-	bar	9.00
											km/h	
											25 LOAD WHEEL	2755
											25 STEER WHEEL	2120
											10 OTHER VEHICLES	2755
											25 OTHER VEHICLES	2120
STATIC SIDE LOADER	3200											
7.00 - 12	TT	16	-	STD	205	675	-	-	5.00 S	-	bar	10.00
											km/h	
											25 LOAD WHEEL	2910
											25 STEER WHEEL	2240
											10 OTHER VEHICLES	2910
											25 OTHER VEHICLES	2240
STATIC SIDE LOADER	3380											
27 X 10 - 12 (250/75 - 12)	TT	16	-	STD	255	690	-	-	8.00 G	-	bar	8.00
											km/h	
											25 LOAD WHEEL	3900
											25 STEER WHEEL	3000
											10 OTHER VEHICLES	3900
											25 OTHER VEHICLES	3000
STATIC SIDE LOADER	4530											
27 X 10 - 12 (250/75 - 12)	TT	20	-	STD	255	690	-	-	8.00 G	-	bar	10.00
											km/h	
											25 LOAD WHEEL	4615
											25 STEER WHEEL	3550
											10 OTHER VEHICLES	4615
											25 OTHER VEHICLES	3550
STATIC SIDE LOADER	5360											

STD: Standard



MAIN APPLICATION:
FORKLIFT



POWER TRAX HD

POWER TRAX HD is a premium bias-ply tire that is specially designed for forklift equipment in industrial applications. The deep tread, the extra thick sidewall and the tough casing provide exceptional durability minimizing the risk of punctures and accidental damages. The tire features excellent cut, chip and tear resistance suitable for rough and hard concrete surface. The specially designed rim guard ensures protection against flats and wheel damages in the rim flange area.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)	
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	bar	kg
15" 8.15 - 15 (28 X 9 - 15)	TT	14	-	STD	227	710	-	-	7.00	7 BD	bar	10.00
											km/h	
											25 LOAD WHEEL	3900
											25 STEER WHEEL	3000
											10 OTHER VEHICLES	3900
											25 OTHER VEHICLES	3000
											STATIC SIDE LOADER	4530
8.25 - 15	TT	14	-	STD	248	845	-	-	6.50	7.0	bar	8.00
											km/h	
											25 LOAD WHEEL	4225
											25 STEER WHEEL	3250
											10 OTHER VEHICLES	4225
											25 OTHER VEHICLES	3250
											STATIC SIDE LOADER	4910
8.25 - 15	TT	16	-	STD	248	845	-	-	6.50	7.0	bar	9.30
											km/h	
											25 LOAD WHEEL	4615
											25 STEER WHEEL	3550
											10 OTHER VEHICLES	4615
											25 OTHER VEHICLES	3550
											STATIC SIDE LOADER	5360
10.00L - 15 (36 X 11 - 15)	TT	16	-	STD	285	918	-	-	7.50 BD	7.5	bar	9.00
											km/h	
											25 LOAD WHEEL	5525
											25 STEER WHEEL	4250
											10 OTHER VEHICLES	5525
											25 OTHER VEHICLES	4250
											STATIC SIDE LOADER	6420
10.00L - 15 (36 X 11 - 15)	TT	24	-	STD	285	918	-	-	7.50 BD	7.5	bar	10.00
											km/h	
											25 LOAD WHEEL	6240
											25 STEER WHEEL	4800
											10 OTHER VEHICLES	6240
											25 OTHER VEHICLES	4800
											STATIC SIDE LOADER	7250
28 X 12.5 - 15	TT	24	-	STD	304	705	-	-	9.75 BD	-	bar	10.00
											km/h	
											25 LOAD WHEEL	4745
											25 STEER WHEEL	3650
											10 OTHER VEHICLES	4745
											25 OTHER VEHICLES	3650
											STATIC SIDE LOADER	5510
250 - 15 (250/70 - 15)	TT	16	-	STD	240	745	-	-	7.50	7.0	bar	8.30
											km/h	
											25 LOAD WHEEL	4355
											25 STEER WHEEL	3350
											10 OTHER VEHICLES	4355
											25 OTHER VEHICLES	3350
											STATIC SIDE LOADER	5060

STD: Standard



MAIN APPLICATION:
FORKLIFT



POWER TRAX HD

POWER TRAX HD is a premium bias-ply tire that is specially designed for forklift equipment in industrial applications. The deep tread, the extra thick sidewall and the tough casing provide exceptional durability minimizing the risk of punctures and accidental damages. The tire features excellent cut, chip and tear resistance suitable for rough and hard concrete surface. The specially designed rim guard ensures protection against flats and wheel damages in the rim flange area.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
									Rec./Flange Height	Alt./Flange Height		
15" 250 - 15 (250/70 - 15)	TT	18	-	STD	240	745	-	-	7.50	7.0	bar	
											km/h	9.50
											25 LOAD WHEEL	4745
											25 STEER WHEEL	3650
											10 OTHER VEHICLES	4745
											25 OTHER VEHICLES	3650
											STATIC SIDE LOADER	5510
											bar	
											km/h	10.00
25 LOAD WHEEL	5040											
25 STEER WHEEL	3875											
10 OTHER VEHICLES	5040											
25 OTHER VEHICLES	3875											
STATIC SIDE LOADER	5850											
bar												
km/h	9.00											
25 LOAD WHEEL	6500											
25 STEER WHEEL	5000											
10 OTHER VEHICLES	6500											
25 OTHER VEHICLES	5000											
STATIC SIDE LOADER	7550											
20" 10.00 - 20	TT	16	-	STD	285	1080	-	-	7.5	8.0	bar	
											km/h	9.00
											25 LOAD WHEEL	6500
											25 STEER WHEEL	5000
											10 OTHER VEHICLES	6500
											25 OTHER VEHICLES	5000
											STATIC SIDE LOADER	7550
											bar	
											km/h	10.00
25 LOAD WHEEL	6890											
25 STEER WHEEL	5300											
10 OTHER VEHICLES	6890											
25 OTHER VEHICLES	5300											
STATIC SIDE LOADER	8005											
bar												
km/h	10.30											
25 LOAD WHEEL	7020											
25 STEER WHEEL	5400											
10 OTHER VEHICLES	7020											
25 OTHER VEHICLES	5400											
STATIC SIDE LOADER	8155											

STD: Standard



MAIN APPLICATION:
FORKLIFT



POWER TRAX HD

POWER TRAX HD is a premium bias-ply tire that is specially designed for forklift equipment in industrial applications. The deep tread, the extra thick sidewall and the tough casing provide exceptional durability minimizing the risk of punctures and accidental damages. The tire features excellent cut, chip and tear resistance suitable for rough and hard concrete surface. The specially designed rim guard ensures protection against flats and wheel damages in the rim flange area.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)			
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height				
20"	12.00 - 20	TT	20	-	STD	320	1150	-	-	8.50	9.0	↓		
												bar		10.00
												km/h		
												25 LOAD WHEEL	9230	
												25 STEER WHEEL	7100	
												10 OTHER VEHICLES	9230	
	25 OTHER VEHICLES	7100												
	STATIC SIDE LOADER	10720												
	bar		10.00											
	km/h													
25 LOAD WHEEL	9230													
25 STEER WHEEL	7100													
10 OTHER VEHICLES	9230													
25 OTHER VEHICLES	7100													
STATIC SIDE LOADER	10720													
bar		10.30												
km/h														
25 LOAD WHEEL	9490													
25 STEER WHEEL	7300													
10 OTHER VEHICLES	9490													
25 OTHER VEHICLES	7300													
STATIC SIDE LOADER	11025													

STD: Standard
SPL: Special



**MAIN APPLICATION:
FORKLIFT**



SNOW GRIP

SNOW GRIP is specifically engineered for forklifts operating in low-temperature environments. The unique tread design features multiple gripping edges for superior grip on fresh or compact snow, resulting in excellent cornering and braking performance on icy and snowy surfaces. The dual bead construction along with the strong casing and reinforced sidewall provides higher load capacity, excellent stability and handling in lift mode in addition to a long tire life.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)	
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	↓	
											bar	5.0
16" 7.50 - 16	TT	12	131 A2	STD	210	810	-	-	6.0	-	10 km/h	1950

STD: Standard



MAIN APPLICATION:
FORKLIFT



SUPER TRAX HD

SUPER TRAX HD has been specifically engineered for forklifts in heavy-duty material handling operations, including port and mining applications. The extra deep tread is made of a unique wear-resistant tread compound ensuring a longer service life. SUPER TRAX HD features a strong casing and a reinforced sidewall resulting in both excellent stability and maneuvering in lift mode. The specially designed rim guard provides protection against flats and wheel damage in the rim flange area.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)		
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	↓		
10"	TT	12	-	STD	195	600	287	1822	5.00 F	5.50 F	bar		9.00
											km/h	25 LOAD WHEEL	2145
												25 STEER WHEEL	1650
											bar		9.00
12"	TT	14	-	STD	200	692	-	-	5.00 S	-	bar		9.00
											km/h	25 LOAD WHEEL	2755
												25 STEER WHEEL	2120
											bar		9.00

STD: Standard



**MAIN APPLICATION:
BACKHOE LOADER**



AT 603

AT 603 is a bias agro-industrial tire for backhoe loaders, compact loaders and compact dumpers in digging and loading applications. AT 603 has been engineered to ensure great traction on drive wheels providing the best performance on and off the road. The AT 603 "special" version offers improved cut and chip resistance while the "HD" version is ideal for heavy-duty service.



SIZE	TYPE	PR	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)
											Rec./Flange Height	Alt./Flange Height	
18" 10.5/80 - 18	TL	10	-	131 A8	131 A8	STD	274	907	405	2657	W 9	W 8; 9	bar
													3.70
													km/h
													10 FR
													2730
													25 FR
													2320
													30 FR
													2185
													40 FR
1950													
10 DW													
1905													
25 DW													
1620													
30 DW													
1525													
40 DW													
1360													
10.5/80 - 18	TL	10	-	131 A8	131 A8	HD	274	907	405	2657	W 9	W 8; 9	bar
													3.70
													km/h
													10 FR
													2730
													25 FR
													2320
													30 FR
													2185
													40 FR
1950													
10 DW													
1905													
25 DW													
1620													
30 DW													
1525													
40 DW													
1360													
10.5/80 - 18	TL	10	-	131 A8	131 A8	SPL	274	907	405	2657	W 9	W 8; 9	bar
													3.70
													km/h
													10 FR
													2730
													25 FR
													2320
													30 FR
													2185
													40 FR
1950													
10 DW													
1905													
25 DW													
1620													
30 DW													
1525													
40 DW													
1360													
12.5/80 - 18	TL	12	-	142 A8	129 A8	STD	308	987	438	2892	W 9	11	bar
													3.70
													km/h
													10 FR
													3710
													25 FR
													3155
													30 FR
													2970
													40 FR
2650													
10 DW													
2590													
25 DW													
2200													
30 DW													
2070													
40 DW													
1850													

STD: Standard
HD: Heavy Duty
SPL: Special



**MAIN APPLICATION:
BACKHOE LOADER**



AT 603

AT 603 is a bias agro-industrial tire for backhoe loaders, compact loaders and compact dumpers in digging and loading applications. AT 603 has been engineered to ensure great traction on drive wheels providing the best performance on and off the road. The AT 603 "special" version offers improved cut and chip resistance while the "HD" version is ideal for heavy-duty service.



SIZE	TYPE	PR	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
							↓	↓	↓	↓	Rec./Flange Height	Alt./Flange Height		
18" 12.5/80 - 18	TL	12	-	142 A8	129 A8	SPL	308	987	438	2892	W 9	11	bar	
													3.70	
													km/h	
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
													10 DW	2590
													25 DW	2200
													30 DW	2070
40 DW	1850													
12.5/80 - 18	TL	16	-	148 A8	135 A8	STD	308	987	438	2892	W 9	11	bar	
													4.90	
													km/h	
													10 FR	4410
													25 FR	3750
													30 FR	3530
													40 FR	3150
													10 DW	3050
													25 DW	2595
													30 DW	2440
40 DW	2180													
12.5/80 - 18	TL	18	-	150 A8	138 A8	STD	308	987	438	2892	W 9	11	bar	
													5.50	
													km/h	
													10 FR	4690
													25 FR	3985
													30 FR	3750
													40 FR	3350
													10 DW	3305
													25 DW	2810
													30 DW	2645
40 DW	2360													

SPL: Special
STD: Standard



**MAIN APPLICATION:
BACKHOE LOADER**



AT 621

AT 621 is suitable for backhoe loaders and compact loaders in all farming digging and loading operations. The AT 621 tire features an extra deep tread which ensures great cut resistance and higher durability. AT 621 is available in several versions to meet the most differing user requirements.



TRACTION



CUT RESISTANT



DURABILITY

SIZE	TYPE	PR	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
											Rec./Flange Height	Alt./Flange Height		
													↓	
15" 33 X 12.5 - 15	TT	8	-	-	-	STD	318	851	385	2493	10.00 F SDC	-	bar	
													km/h	3.25
													10	2130
16" 9.00 - 16	TT	16	137 A6	-	-	IND	260	925	-	-	6.50 H	6.00 G	bar	
													km/h	7.25
													30	2300
12.5/70 - 16	TL	8	-	-	-	STD	315	855	385	2584	10 LB	-	bar	
													km/h	2.60
													10	1645
12.5/70 - 16	TL	14	-	-	-	STD	315	855	385	2584	10 LB	-	bar	
													km/h	4.40
													10	2240
18" 12.5/80 - 18	TT	12	-	142 A8	129 A8	STD	308	987	438	2892	W 9	11.0	bar	
													km/h	3.70
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
													10 DW	2590
													25 DW	2200
													30 DW	2070
													40 DW	1850
12.5/80 - 18	TL	12	-	142 A8	129 A8	STD	308	987	438	2892	W 9	11.0	bar	
													km/h	3.70
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
													10 DW	2590
													25 DW	2200
													30 DW	2070
													40 DW	1850
12.5/80 - 18	TL	12	-	142 A8	129 A8	SPL	308	987	438	2892	W 9	11	bar	
													km/h	3.70
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
													10 DW	2590
													25 DW	2200
													30 DW	2070
													40 DW	1850

STD: Standard
IND: Industrial
SPL: Special



**MAIN APPLICATION:
BACKHOE LOADER**



AT 621

AT 621 is suitable for backhoe loaders and compact loaders in all farming digging and loading operations. The AT 621 tire features an extra deep tread which ensures great cut resistance and higher durability. AT 621 is available in several versions to meet the most differing user requirements.



SIZE	TYPE	PR	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)		
							Rec./Flange Height	Alt./Flange Height							
18"	12.5/80 - 18	TT	16	-	148 A8	135 A8	STD	308	987	438	2892	W 9	11.0	bar	4.90
														km/h	4410
														10 FR	3750
														25 FR	3530
														30 FR	3150
														40 FR	3050
														10 DW	2595
														25 DW	2440
														30 DW	2180
														40 DW	2180
18"	12.5/80 - 18	TL	16	-	148 A8	135 A8	IND HD	308	987	465	2928	W 9	11.0	bar	4.90
														km/h	4410
														10 FR	3750
														25 FR	3530
														30 FR	3150
														40 FR	3050
														10 DW	2595
														25 DW	2440
														30 DW	2180
														40 DW	2180
18"	15.5/60 - 18	TL	10	-	-	-	STD	400	950	428	2871	W 13	-	bar	2.60
														km/h	2400
														10	2400
18"	15.5/70 - 18 (400/70 - 18)	TL	10	-	-	-	STD	400	1030	474	3111	W 13	-	bar	2.60
														km/h	2700
														10	2700
20"	17.5/65 - 20	TL	10	-	-	-	STD	450	1090	490	3294	W 14 L	-	bar	2.40
														km/h	3195
														10	3195
20"	42 X 17 - 20	TT	10	-	-	-	STD	432	1073	480	3198	14.00 TG SDC	-	bar	3.00
														km/h	3690
														10	3690
20"	400/70 - 20	TL	-	149 A8	-	-	STD	405	1090	-	-	13	12 SDC; 13 SDC; 14	bar	4.00
														km/h	3250
														40	3250

STD: Standard
IND HD: Industrial Heavy Duty



**MAIN APPLICATION:
BACKHOE LOADER**



AT 621

AT 621 is suitable for backhoe loaders and compact loaders in all farming digging and loading operations. The AT 621 tire features an extra deep tread which ensures great cut resistance and higher durability. AT 621 is available in several versions to meet the most differing user requirements.



TRACTION



CUT RESISTANT



DURABILITY

SIZE	TYPE	PR	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)		
											Rec./Flange Height	Alt./Flange Height			
24"	16.9 - 24	TL	12	149 A8	-	-	IND	450	1302	582	3776	DW 15 L	DW 14 L	bar	
														km/h	2.60
														40	3250
17.5L - 24	TL	8	139 A8	-	-	STD	450	1255	563	3640	DW 15 L	DW 14 L	bar		
													km/h	1.70	
													40	2430	
19.5L - 24	TL	12	151 A8	-	-	STD	482	1305	587	3936	DW 16 L	-	bar		
													km/h	2.30	
													40	3450	
26"	18.4 - 26	TL	12	156 A8	-	-	STD	480	1425	636	4133	DW 16 L	DW 15 L	bar	
														km/h	2.50
														40	4000
28"	16.9 - 28	TT	12	152 A8	-	-	IND	450	1410	645	4247	DW 15 L	DW 14 L	bar	
														km/h	2.60
														40	3550
16.9 - 28	TL	12	152 A8	-	-	IND	450	1410	645	4247	DW 15 L	DW 14 L	bar		
													km/h	2.60	
													40	3550	
30"	16.9 - 30	TL	12	153 A8	-	-	IND	450	1460	670	4398	DW 15 L	DW 14 L	bar	
														km/h	2.60
														40	3650

STD: Standard
IND: Industrial



**MAIN APPLICATION:
BACKHOE LOADER**



AT 625

AT 625 is suitable for backhoe loaders and compact loaders in all farming digging and loading operations. Its extra deep tread ensures increased puncture resistance and durability. AT 625 features excellent traction and stability as well as improved cut and chip resistance.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 40 KM/H		
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)	
24"	14.9 - 24	TT	12	145 A8	STD	380	1265	575	3646	DW 13	DW 11; DW 12; DW 13 L	2.90	2900
	14.9 - 24	TL	12	145 A8	STD	380	1265	575	3646	DW 13	DW 11; DW 12; DW 13 L	2.90	2900
28"	16.9 - 28	TT	12	152 A8	IND	450	1415	642	4160	DW 15 L	DW 14 L	2.60	3550
	16.9 - 28	TL	12	152 A8	IND	450	1415	642	4160	DW 15 L	DW 14 L	2.60	3550

STD: Standard
IND: Industrial



BK 6060

BK 6060 is a both field- and road-oriented tire for trailers and backhoe loaders in transport as well as digging and loading applications. This block pattern tire provides an extended tire life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 30 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
16"	9.00 - 16	TT	-	IND	255	925	427	2740	6.50 H	6.00 G	7.25	2300

IND: Industrial



**MAIN APPLICATION:
BACKHOE LOADER**



CON STAR

CON STAR is particularly suitable for backhoe loaders, compact loaders and telehandlers in digging and loading applications. It features high load capacity along with excellent vertical and horizontal stability. CON STAR has been made of a cut-and-chip-resistant compound contributing to an extended tire life-cycle.



HIGH LOAD CAPACITY



DURABILITY



STABILITY



CUT & CHIP RESISTANCE



CUT RESISTANT

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 40 KM/H	
									Rec./Flange Height	Alt./Flange Height		
											bar	max load (kg)
18" 340/80 - 18 (12.5/80 - 18)	TL	-	143 A8	IND	350	1015	460	3075	11	12; 11 SDC; 12 SDC; W 10; W 11	4.00	2725
20" 340/80 - 20 (12.5/80 - 20)	TL	-	144 A8	IND	350	1065	491	3272	11	12; 11 SDC; 12 SDC; W 10; W 11	4.00	2800
380/75 - 20 (14.5 - 20)	TL	-	148 A8	IND	385	1080	500	3273	W 12	W 11; 12 SDC; 12; W 13; 13 SDC; 13	4.00	3150
400/70 - 20 (16.0/70 - 20)	TL	-	156 A8	IND	405	1080	501	3303	13	12 SDC; 13 SDC; 14	5.00	4000
400/70 - 20 (16.0/70 - 20)	TL	16	149 A8	IND	405	1080	501	3303	13	12 SDC; 13 SDC; 14	4.00	3250
24" 400/70 - 24 (16.0/70 - 24)	TL	-	158 A8	IND	395	1175	-	-	13	DW 12; 13 SDC; DW 13; DW 13 L; DW 14 L	5.00	4250
400/80 - 24 (15.5/80 - 24)	TL	20	162 A8	STD	405	1250	570	3781	DW 13	DW 12; DW 13 L; DW 14 L	5.00	4750
440/80 - 24 (17.0/80 - 24)	TL	22	168 A8	IND	455	1315	610	3986	DW 14 L	DW 13; DW 13 L; DW 15 L	5.00	5600
460/70 - 24 (17.5L - 24)	TL	-	159 A8	IND	460	1250	-	-	DW 15 L	DW 14 L; DW 16 L	4.00	4375
500/70 - 24 (19.5L - 24)	TL	-	164 A8	IND	505	1300	579	3926	DW 16 L	DW 15 L; DW 18 L	4.00	5000
26" 480/80 - 26 (18.4 - 26)	TL	-	160 A8	IND	490	1410	643	4272	DW 15 L	DW 16 L	3.20	4500
28" 440/80 - 28 (16.9 - 28)	TL	-	156 A8	IND	450	1420	632	4299	DW 14 L	DW 13; DW 13 L; DW 15 L	3.20	4000

STD: Standard
IND: Industrial



MAIN APPLICATION:
BACKHOE LOADER



EM 937 (E-3/L-3)

EM 937 (E-3/L-3) has been specially designed for loaders and backhoe loaders in dig and load applications, depending on the size. It features excellent durability and provides cut and chip resistance.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)			
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	↓			
24" 14.00 - 24	TT	20	-	STD	375	1368	628	4050	10.00 W	-	bar	4.75	7.00	
											km/h	50	4625	-
											10	-	8500	
14.00 - 24	TL	20	-	STD	375	1368	628	4050	10.00 W	-	bar	4.75	7.00	
											km/h	50	4625	-
											10	-	8500	
14.00 - 24	TT	24	-	STD	375	1368	628	4050	10.00 W	-	bar	5.75	8.50	
											km/h	50	5150	-
											10	-	9500	
14.00 - 24	TL	24	-	STD	375	1368	628	4050	10.00 W	-	bar	5.75	8.50	
											km/h	50	5150	-
											10	-	9500	
14.00 - 24	TT	28	-	STD	375	1368	628	4050	10.00 W	-	bar	6.50	9.25	
											km/h	50	5600	-
											10	-	10000	
14.00 - 24	TL	28	-	STD	375	1368	628	4050	10.00 W	-	bar	6.50	9.25	
											km/h	50	5600	-
											10	-	10000	
14.00 - 24	TL	28	-	STD	375	1368	628	4050	10.00 WA	-	bar	6.50	9.25	
											km/h	50	5600	-
											10	-	10000	
14.00 - 24	TT	32	-	STD	375	1368	628	4050	10.00 W	-	bar	7.25	10.00	
											km/h	50	6030	-
											10	-	10470	
14.00 - 24	TL	32	-	STD	375	1368	628	4050	10.00 W	-	bar	7.25	10.00	
											km/h	50	6030	-
											10	-	10470	

STD: Standard



MAIN APPLICATION:
BACKHOE LOADER



EM 937 (E-3/L-3)

EM 937 (E-3/L-3) has been specially designed for loaders and backhoe loaders in dig and load applications, depending on the size. It features excellent durability and provides cut and chip resistance.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)		
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height			
25" 14.00 - 25	TT	12	-	STD	375	1368	620	4105	10.00/1.5	-	↓		
											bar	2.75	4.25
											km/h	3350	-
											50	-	6300
14.00 - 25	TT	20	-	STD	375	1368	620	4105	10.00/1.5	-	bar		
											km/h	4.75	7.00
											50	4625	-
											10	-	8500
14.00 - 25	TL	20	-	STD	375	1368	620	4105	10.00/1.5	-	bar		
											km/h	4.75	7.00
											50	4625	-
											10	-	8500
14.00 - 25	TT	20	-	ASB	375	1368	620	4105	10.00/1.5	-	bar		
											km/h	4.75	7.00
											40	4765	-
											10	-	8500
14.00 - 25	TT	20	-	AB	375	1368	620	4105	10.00/1.5	-	bar		
											km/h	4.75	7.00
											40	4765	-
											10	-	8500
14.00 - 25	TT	20	-	SB	375	1368	620	4105	10.00/1.5	-	bar		
											km/h	4.75	7.00
											40	4765	-
											10	-	8500
14.00 - 25	TT	24	-	STD	375	1368	620	4105	10.00/1.5	-	bar		
											km/h	5.75	8.50
											50	5150	-
											10	-	9500
14.00 - 25	TL	24	-	STD	375	1368	620	4105	10.00/1.5	-	bar		
											km/h	5.75	8.50
											50	5150	-
											10	-	9500

STD: Standard
ASB: Aramid + Steel Belted
AB: Aramid Belted
SB: Steel Belted



MAIN APPLICATION:
BACKHOE LOADER



MULTIMAX MP 522

MULTIMAX MP 522 is the BKT multi-purpose tire developed for manifold agro-industrial applications. It is suitable for all digging and loading operations on vehicles such as telehandlers, compact loaders and backhoe loaders. Stability and high load capacity are its strengths as well as outstanding puncture resistance. Multimax MP 522 is the right response for all agro-industrial heavy-duty needs.



SIZE	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	RIM		LOAD CAPACITY (KG/TIRE)											
								Rec.	Alt.												
18"	280/80 R 18 IND	132 A8/B	STD	282	907	421	2727	350	9; 9 SDC	-											
											bar										
											km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
											50	960	1140	1300	1480	1660	1780	2000	-	-	
											40	960	1140	1300	1480	1660	1780	2000	-	-	
											30	1030	1220	1395	1585	1780	1905	2140	-	-	
											25	1070	1270	1445	1645	1845	1980	2220	-	-	
											10 Cyc.	1170	1440	1695	1950	2220	2415	2730	2880	3000	
											Static	1795	2210	2600	2990	3405	3705	4190	4420	4600	
												340/80 R 18 IND (12.5/80 R 18)	143 A8/B	STD	343	1001	458	3002	475	11; 11 SDC; W 11	W 10; 12; 12 SDC
bar																					
km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4												
50	1310	1555	1775	2020	2265	2430	2725	-	-												
40	1310	1555	1775	2020	2265	2430	2725	-	-												
30	1405	1665	1900	2165	2425	2600	2920	-	-												
25	1455	1725	1970	2240	2515	2695	3025	-	-												
10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090												
Static	2450	3010	3545	4080	4640	5050	5710	6020	6270												
20"	340/80 R 20 IND	144 A8/B	STD	343	1052	481	3212	500	11	W10; 11 SDC; W11; 12; 12 SDC											
											bar										
											km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
											50	1345	1600	1820	2075	2325	2495	2800	-	-	
											40	1345	1600	1820	2075	2325	2495	2800	-	-	
											30	1440	1710	1950	2220	2490	2670	3000	-	-	
											25	1495	1775	2025	2305	2585	2770	3110	-	-	
											10 Cyc.	1640	2020	2375	2730	3110	3385	3825	4035	4200	
											Static	2515	3095	3640	4190	4770	5185	5865	6185	6440	
												380/75 R 20 IND (14.5 R 20)	148 A8/B	STD	384	1074	483	3251	500	W 12	W 11; 11; 12
bar																					
km/h	1.6	2.0	2.4	2.8	3.2	3.6	3.8	4.0	4.2	4.4											
50	1500	1770	2040	2305	2575	2860	3005	3150	-	-											
40	1500	1770	2040	2305	2575	2860	3005	3150	-	-											
30	1610	1900	2195	2490	2780	3075	3220	3370	-	-											
25	1670	1975	2280	2585	2890	3195	3350	3500	-	-											
10 Cyc.	1850	2260	2670	3080	3490	3900	4110	4315	4520	4730											
Static	2840	3470	4100	4730	5360	5990	6305	6620	6935	7250											
	400/70 R 20 IND (16.0/70 R 20)	149 A8/B	STD	404	1068	476	3199	525	13	12 SDC; 13 SDC; 14											
											bar										
											km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
											50	1560	1855	2115	2405	2700	2895	3250	-	-	
											40	1560	1855	2115	2405	2700	2895	3250	-	-	
											30	1675	1985	2265	2580	2890	3100	3480	-	-	
											25	1735	2060	2350	2675	3000	3215	3610	-	-	
											10 Cyc.	1905	2340	2755	3170	3610	3925	4440	4680	4875	
											Static	2920	3590	4225	4860	5535	6020	6805	7180	7475	

STD: Standard



MAIN APPLICATION:
BACKHOE LOADER



MULTIMAX MP 522

MULTIMAX MP 522 is the BKT multi-purpose tire developed for manifold agro-industrial applications. It is suitable for all digging and loading operations on vehicles such as telehandlers, compact loaders and backhoe loaders. Stability and high load capacity are its strengths as well as outstanding puncture resistance. Multimax MP 522 is the right response for all agro-industrial heavy-duty needs.



SIZE	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	RIM		LOAD CAPACITY (KG/TIRE)																									
								Rec.	Alt.	↓																									
										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
										km/h	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4											
24" 400/70 R 24 IND	152 A8/B	STD	404	1170	533	3527	575	13	DW 12; 13 SDC; DW 13; DW 13 L; DW 14 L	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
										km/h	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4											
										50	1705	2025	2310	2630	2950	3160	3550	-	-																
										40	1705	2025	2310	2630	2950	3160	3550	-	-																
										30	1825	2170	2470	2815	3155	3385	3800	-	-																
										25	1895	2250	2565	2920	3275	3515	3945	-	-																
										10 Cyc	2080	2560	3010	3465	3945	4290	4850	5115	5325																
Static	3185	3920	4615	5310	6045	6575	7435	7840	8165																										
400/80 R 24 IND	162 A8/B	STD	404	1250	553	3778	600	DW 13	DW 12; DW 13 L; DW 14 L	bar	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4											
										km/h	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4											
										50	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-											
										40	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-											
										30	1985	2340	2750	3105	3460	3590	3770	4170	4515	4745	4860	5085	-	-											
										25	2060	2430	2850	3220	3590	3725	3910	4330	4690	4925	5040	5275	-	-											
										10 Cyc	2280	2785	3280	3850	4350	4600	4845	5280	5845	6090	6330	6655	6810	7125											
Static	3500	4270	5030	5900	6670	7050	7430	8100	8960	9340	9710	10205	10445	10925																					
440/80 R 24 IND	161 A8/B	STD	441	1314	586	3956	625	DW 14 L	DW 13; DW 13 L; DW 15 L	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
										km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
										50	2220	2640	3010	3425	3840	4120	4625	-	-																
										40	2220	2640	3010	3425	3840	4120	4625	-	-																
										30	2380	2825	3220	3665	4110	4410	4950	-	-																
										25	2465	2930	3340	3800	4265	4575	5135	-	-																
										10 Cyc	2710	3335	3925	4515	5140	5590	6320	6665	6940																
Static	4150	5110	6015	6920	7875	8570	9685	10215	10640																										
460/70 R 24 IND (17.5L R 24)	159 A8/B	STD	465	1250	568	3766	600	DW 15 L	DW 14 L; DW 16 L	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
										km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
										50	2100	2495	2845	3240	3635	3895	4375	-	-																
										40	2100	2495	2845	3240	3635	3895	4375	-	-																
										30	2250	2675	3050	3470	3890	4170	4685	-	-																
										25	2335	2775	3160	3600	4035	4330	4860	-	-																
										10 Cyc	2565	3155	3710	4270	4860	5285	5975	6305	6565																
Static	3930	4835	5690	6545	7450	8105	9160	9665	10065																										
500/70 R 24 IND (19.5L R 24)	164 A8/B	STD	503	1310	595	3890	625	DW 16 L	DW 15 L; DW 18 L	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
										km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
										50	2400	2850	3250	3700	4150	4450	5000	-	-																
										40	2400	2850	3250	3700	4150	4450	5000	-	-																
										30	2570	3050	3480	3960	4445	4765	5350	-	-																
										25	2665	3165	3610	4110	4610	4940	5550	-	-																
										10 Cyc	2925	3600	4240	4875	5550	6040	6825	7200	7500																
Static	4485	5520	6500	7475	8510	9260	10465	11040	11500																										

STD: Standard



MAIN APPLICATION:
BACKHOE LOADER



MULTIMAX MP 522

MULTIMAX MP 522 is the BKT multi-purpose tire developed for manifold agro-industrial applications. It is suitable for all digging and loading operations on vehicles such as telehandlers, compact loaders and backhoe loaders. Stability and high load capacity are its strengths as well as outstanding puncture resistance. Multimax MP 522 is the right response for all agro-industrial heavy-duty needs.



SIZE	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	RIM		LOAD CAPACITY (KG/TIRE)												
								Rec.	Alt.													
24"	540/70 R 24 IND	168 A8/B	STD	530	1366	611	4133	650	DW 16 L	DW 18 L												
											bar											
											km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4		
											50	2690	3195	3640	4145	4650	4985	5600	-	-		
											40	2690	3195	3640	4145	4650	4985	5600	-	-		
											30	2880	3420	3900	4440	4980	5340	5995	-	-		
											25	2990	3550	4045	4605	5165	5540	6220	-	-		
10 Cyc.	3280	4035	4750	5460	6220	6765	7645	8065	8400													
Static	5025	6185	7280	8375	9535	10370	11725	12365	12880													
26"	480/80 R 26 IND	160 A8/B	STD	479	1428	638	4287	675	DW 15 L	DW 16 L												
											bar											
											km/h	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	
											50	2610	3060	3330	3555	3780	4005	4275	4500	-	-	
											40	2610	3060	3330	3555	3780	4005	4275	4500	-	-	
											30	2795	3275	3565	3805	4045	4290	4575	4815	-	-	
											25	2900	3400	3700	3950	4200	4450	4750	4995	-	-	
10 Cyc.	3175	3915	4255	4590	4995	5335	5670	6075	6415	6750												
Static	4865	6005	6525	7040	7660	8180	8695	9315	9835	10350												
28"	440/80 R 28 IND	156 A8/B	STD	441	1415	643	4278	675	DW 14 L	DW 13 L; DW 15 L												
											bar											
											km/h	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	
											50	2300	2725	2940	3150	3360	3575	3790	4000	-	-	
											40	2300	2725	2940	3150	3360	3575	3790	4000	-	-	
											30	2480	2930	3155	3380	3605	3830	4055	4280	-	-	
											25	2570	3040	3270	3505	3740	3970	4205	4440	-	-	
10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000												
Static	4360	5330	5810	6295	6780	7265	7750	8230	8715	9200												

STD: Standard



MAIN APPLICATION:
BACKHOE LOADER



RT 747 AGRO INDUSTRIAL

RT 747 AGRO INDUSTRIAL is a radial agro-industrial tire suitable for backhoe loaders, compact loaders and telehandlers. Its extra wide lugs provide excellent grip and great stability in lift operations. RT 747 AGRO INDUSTRIAL is the right answer to all general farming operations that need outstanding versatility.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)						
									Rec./Flange Height	Alt./Flange Height	↓						
											bar	1.2	1.6	2.0	2.4	2.8	3.2
24" 460/70 R 24 (17.5L R 24)	TL	-	152 A8/149 B	STD	465	1254	556	3840	DW 15 L	DW 14 L; DW 16 L	km/h	50	40	30	25	10 Cyc	Static
											1530	1885	2210	2570	2985	3250	
											1670	2060	2415	2805	3160	3550	
											1785	2205	2585	3000	3380	3800	
											1850	2285	2680	3115	3505	3940	
											2505	3090	3620	4205	4740	5325	
											3505	4325	5070	5890	6635	7455	
500/70 R 24 (19.5L R 24)	TL	-	157 A8/154 B	STD	485	1320	585	3949	DW 16 L	DW 15 L; DW 18 L	bar	1.2	1.6	2.0	2.4	2.8	3.0
											km/h	50	40	30	25	10 Cyc	Static
											1765	2175	2550	2965	3340	3750	
											1940	2395	2805	3260	3670	4125	
											2075	2560	3000	3490	3930	4415	
											2155	2655	3115	3620	4075	4580	
											2910	3590	4210	4890	5510	6190	
4075	5025	5890	6845	7710	8665												

STD: Standard



**MAIN APPLICATION:
BACKHOE LOADER**



TR 459

TR 459 has been particularly designed for digging and loading operations as well as municipality and maintenance applications with tractors and backhoe loaders. It offers high stability and is available in two versions. The "aramid-belted" version features high puncture resistance and is cut-and-chip-resistant, whilst the "special" version provides an extended tire life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 40 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
20" 400/70 - 20	TL	-	149 A8	STD	410	1090	-	-	13	12 SDC; 13 SDC; 14	4.00	3250
24" 14.9 - 24	TL	8	137 A8	IND	390	1244	562	3657	DW 13	DW 12; DW 1; DW 13 L	2.10	2300
14.9 - 24	TL	12	145 A8	IND	390	1244	562	3657	DW 13	DW 12; DW 11; DW 13 L	2.90	2900
16.9 - 24	TL	8	142 A8	IND	440	1310	590	3850	DW 15 L	DW 14 L	1.90	2650
16.9 - 24	TL	10	145 A8	IND	440	1310	590	3850	DW 15 L	DW 14 L	2.20	2900
16.9 - 24	TL	12	149 A8	IND	440	1310	590	3850	DW 15 L	DW 14 L	2.60	3250
17.5L - 24	TL	8	139 A8	IND	445	1270	557	3825	DW 15 L	DW 14 L	1.70	2430
17.5L - 24	TL	10	144 A8	IND	445	1270	557	3825	DW 15 L	DW 14 L	2.20	2800
17.5L - 24	TL	12	148 A8	IND	445	1270	557	3825	DW 15 L	DW 14 L	2.70	3150
18.4 - 24	TL	12	155 A8	IND	472	1375	603	4043	DW 16 L	DW 15 L	2.50	3875
19.5L - 24	TL	10	147 A8	IND	490	1325	585	3840	DW 16 L	-	1.90	3075
19.5L - 24	TL	12	151 A8	IND	490	1325	585	3840	DW 16 L	-	2.30	3450
19.5L - 24	TL	12	151 A8	IND SPL	490	1325	585	3840	DW 16 L	-	2.30	3450
21L - 24	TL	12	155 A8	IND	533	1378	605	3995	DW 18 L	-	2.20	3875
21L - 24	TL	14	157 A8	STD	533	1378	605	3995	DW 18 L	-	2.50	4125

STD: Standard
IND: Industrial
IND SPL: Industrial Special



**MAIN APPLICATION:
BACKHOE LOADER**



TR 459

TR 459 has been particularly designed for digging and loading operations as well as municipality and maintenance applications with tractors and backhoe loaders. It offers high stability and is available in two versions. The "aramid-belted" version features high puncture resistance and is cut-and-chip-resistant, whilst the "special" version provides an extended tire life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 40 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
26" 18.4 - 26	TL	12	156 A8	IND	472	1425	628	4346	DW 16 L	DW 15 L	2.50	4000
18.4 - 26	TL	14	159 A8	IND	472	1425	628	4346	DW 16 L	DW 15 L	2.90	4375
28" 16.9 - 28	TL	8	145 A8	IND	440	1410	640	4145	DW 15 L	DW 14 L	1.90	2900
16.9 - 28	TL	10	148 A8	IND	440	1410	640	4145	DW 15 L	DW 14 L	2.20	3150
16.9 - 28	TL	12	152 A8	IND	440	1410	640	4145	DW 15 L	DW 14 L	2.60	3550
18.4 - 28	TL	12	157 A8	IND	472	1475	653	4337	DW 16 L	DW 15 L	2.50	4125
21L - 28	TL	12	157 A8	IND	535	1480	-	-	DW 18 A	-	2.20	4125
30" 16.9 - 30	TL	12	153 A8	IND	440	1470	657	4484	DW 15 L	DW 14 L	2.70	3650

IND: Industrial



**MAIN APPLICATION:
BACKHOE LOADER**



TR 463

TR 463 has been specially designed for backhoe loaders and industrial tractors. Made of a superior tread compound and featuring a strong nylon casing, this tire stands for best results in industrial and OTR applications, and on construction sites. TR 463 provides excellent traction for drive wheels.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 30 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
24" 16.9 - 24	TL	12	149 A8	IND	445	1300	584	3877	DW 15 L	DW 14 L	2.60	3250
28" 16.9 - 28	TL	12	152 A8	IND	450	1405	636	4190	DW 15 L	DW 14 L	2.60	3550

IND: Industrial



**MAIN APPLICATION:
BACKHOE LOADER**



XL GRIP

XL GRIP has been specially designed for backhoe loaders that are employed in heavy-duty operations in excavation, dozing and loading applications. The non-directional tread pattern provides best traction and stability. The special tread compound results in excellent cut and chip resistance and an extended tread life.



HEAVY DUTY SERVICE



DURABILITY



CUT & CHIP RESISTANCE



STABILITY

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)			
									Rec./Flange Height	Alt./Flange Height				
16"	9.00 - 16	TT	12	132 A6	STD	260	910	-	-	6.50 H	6.00 G	↓		
												bar	5.75	
16"	9.00 - 16	TT	16	137 A6	STD	260	910	-	-	6.50 H	6.00 G	↓		
												bar	7.25	
18"	12.5/80 - 18	TT	12	-	STD	305	980	-	-	W 9	11	↓		
												bar	3.70	
												km/h	3710	
												25 FR	3155	
												30 FR	2970	
18"	12.5/80 - 18	TL	12	-	STD	305	980	-	-	W 9	11	↓		
												bar	3.70	
												km/h	3710	
												25 FR	3155	
												30 FR	2970	
20"	10.00 - 20	TT	18	-	ASB	285	1075	505	3257	7.5	7.0	↓		
												bar	8.30	7.60
												km/h	4480	-
												40	-	3305
20"	10.00 - 20	TT	18	-	AB	285	1075	505	3257	7.5	7.0	↓		
												bar	8.30	7.60
												km/h	4480	-
												40	-	3305
20"	10.00 - 20	TT	18	-	IND	285	1075	505	3257	7.5	7.0	↓		
												bar	8.30	7.60
												km/h	4480	-
												40	-	3305
20"	10.00 - 20	TT	18	-	SB	285	1075	505	3257	7.5	7.0	↓		
												bar	8.30	7.60
												km/h	4480	-
												40	-	3305
24"	12.00 - 24	TT	20	-	IND	320	1250	585	3710	8.5	8.0	↓		
												bar	8.25	8.25
												km/h	6900	-
24"	14.9 - 24	TT	12	145 A8	IND	380	1240	575	3646	DW 13	DW 11; DW 12; DW 13L	↓		
												bar	2.90	
												km/h	2900	
28"	16.9 - 28	TT	12	152 A8	IND	450	1400	640	4175	DW 15L	DW 14L	↓		
												bar	2.60	
28"	16.9 - 28	TT	12	152 A8	IND	450	1400	640	4175	DW 15L	DW 14L	km/h	3550	

STD: Standard
ASB: Aramid + Steel Belted
AB: Aramid Belted
IND: Industrial
SB: Steel Belted



**MAIN APPLICATION:
COMPACT DUMPER**



AT 603

AT 603 is a bias agro-industrial tire for backhoe loaders, compact loaders and compact dumpers in digging and loading applications. AT 603 has been engineered to ensure great traction on drive wheels providing the best performance on and off the road. The AT 603 "special" version offers improved cut and chip resistance while the "HD" version is ideal for heavy-duty service.



SIZE	TYPE	PR	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
							Rec./Flange Height	Alt./Flange Height						
18" 10.5/80 - 18	TL	10	-	131 A8	131 A8	STD	274	907	405	2657	W 9	W 8; 9	bar	
													3.70	
													km/h	
													10 FR	2730
													25 FR	2320
													30 FR	2185
													40 FR	1950
													10 DW	1905
													25 DW	1620
													30 DW	1525
40 DW	1360													
10.5/80 - 18	TL	10	-	131 A8	131 A8	HD	274	907	405	2657	W 9	W 8; 9	bar	
													3.70	
													km/h	
													10 FR	2730
													25 FR	2320
													30 FR	2185
													40 FR	1950
													10 DW	1905
													25 DW	1620
													30 DW	1525
40 DW	1360													
10.5/80 - 18	TL	10	-	131 A8	131 A8	SPL	274	907	405	2657	W 9	W 8; 9	bar	
													3.70	
													km/h	
													10 FR	2730
													25 FR	2320
													30 FR	2185
													40 FR	1950
													10 DW	1905
													25 DW	1620
													30 DW	1525
40 DW	1360													
12.5/80 - 18	TL	12	-	-	-	STD	308	987	438	2892	W 9	11	bar	
													3.70	
													km/h	
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
													10 DW	2590
													25 DW	2200
													30 DW	2070
40 DW	1850													

STD: Standard
HD: Heavy Duty
SPL: Special



**MAIN APPLICATION:
COMPACT DUMPER**



AT 603

AT 603 is a bias agro-industrial tire for backhoe loaders, compact loaders and compact dumpers in digging and loading applications. AT 603 has been engineered to ensure great traction on drive wheels providing the best performance on and off the road. The AT 603 "special" version offers improved cut and chip resistance while the "HD" version is ideal for heavy-duty service.



SIZE	TYPE	PR	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
											Rec./Flange Height	Alt./Flange Height		
18" 12.5/80 - 18	TL	12	-	-	-	SPL	308	987	438	2892	W 9	11	bar	
													km/h	3.70
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
													10 DW	2590
													25 DW	2200
													30 DW	2070
													40 DW	1850
12.5/80 - 18	TL	16	-	148 A8	135 A8	STD	308	987	438	2892	W 9	11	bar	
													km/h	4.90
													10 FR	4410
													25 FR	3750
													30 FR	3530
													40 FR	3150
													10 DW	3050
													25 DW	2595
													30 DW	2440
													40 DW	2180
12.5/80 - 18	TL	18	-	150 A8	138 A8	STD	308	987	438	2892	W 9	11	bar	
													km/h	5.50
													10 FR	4690
													25 FR	3985
													30 FR	3750
													40 FR	3350
													10 DW	3305
													25 DW	2810
													30 DW	2645
													40 DW	2360

SPL: Special
STD: Standard



MAIN APPLICATION:
COMPACT DUMPER



FLOTATION TR 675

FLOTATION TR 675 is best suited for soil tillage operations and transport. It fits trailers, compact dumpers and implement machinery. FLOTATION TR 675 has been engineered to provide outstanding traction remaining gentle on the ground to prevent crop damages.



SIZE	Type	PR	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)																
											Rec./Flange Height	Alt./Flange Height	↓																
22.5" 500/60 - 22.5	TL	12	-	157 A8/154 B	145 A8/142 B	STD	500	1181	534	3505	AG 16.00	15.00; 17.00	bar	1.50	2.00	2.40													
													km/h																
													10 FR	4390	5195	5775													
													20 FR	3950	4675	5200													
													30 FR	3510	4155	4620													
													40 FR	3135	3710	4125													
													50 FR	2820	3340	3750													
													10 DW	3085	3645	4060													
													20 DW	2780	3280	3655													
													30 DW	2470	2920	3250													
													40 DW	2205	2605	2900													
													50 DW	1985	2345	2650													
													500/60 - 22.5	TL	16	-	163 A8/159 B	151 A8/ 148 B	STD	500	1181	534	3505	AG 16.00	15.00; 17.00	bar	2.80	3.00	3.20
																										km/h			
10 FR	6315	6575	6825																										
20 FR	5685	5915	6145																										
30 FR	5050	5260	5460																										
40 FR	4510	4695	4875																										
50 FR	4060	4225	4375																										
10 DW	4465	4650	4830																										
20 DW	4020	4185	4345																										
30 DW	3575	3720	3865																										
40 DW	3190	3320	3450																										
50 DW	2870	2990	3150																										
500/60 - 22.5	TL	20	-	168 A8/164 B	155 A8/151 B	DB	500	1181	534	3505	AG 16.00	15.00; 17.00														bar	3.70	3.80	4.00
																										km/h			
													10 FR	7425	7545	7840													
													20 FR	6685	6790	7055													
													30 FR	5940	6035	6270													
													40 FR	5305	5390	5600													
													50 FR	4775	4850	5000													
													10 DW	5255	5340	5425													
													20 DW	4730	4805	4885													
													30 DW	4205	4275	4340													
													40 DW	3755	3815	3875													
													50 DW	3380	3435	3450													
													550/45 - 22.5	TL	20	-	166 A8/162 B	154 A8/150 B	STD	543	1070	-	-	AG 16.00	-	bar	3.00	3.50	4.00
																										km/h			
10 FR	6270	6860	7420																										
20 FR	5645	6175	6680																										
30 FR	5020	5490	5935																										
40 FR	4480	4900	5300																										
50 FR	4030	4410	4750																										
10 DW	4440	4860	5250																										
20 DW	3995	4370	4725																										
30 DW	3550	3885	4200																										
40 DW	3170	3470	3750																										
50 DW	2855	3125	3350																										

STD: Standard
DB: Dual Belted



MAIN APPLICATION:
COMPACT DUMPER



FLOTATION TR 675

FLOTATION TR 675 is best suited for soil tillage operations and transport. It fits trailers, compact dumpers and implement machinery. FLOTATION TR 675 has been engineered to provide outstanding traction remaining gentle on the ground to prevent crop damages.



SIZE	Type	PR	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)			
											Rec./Flange Height	Alt./Flange Height	↓			
													bar	1.50	1.80	2.10
22.5" 550/60 - 22.5	TL	12	-	160 A8/156 B	148 A8/144 B	STD	550	1260	547	3640	AG 16.00	-	10 FR	5175	5755	6300
													20 FR	4655	5180	5670
													30 FR	4140	4605	5040
													40 FR	3695	4110	4500
													50 FR	3325	3700	4000
													10 DW	3620	4030	4410
													20 DW	3255	3630	3970
													30 DW	2895	3225	3530
													40 DW	2585	2880	3150
													50 DW	2325	2590	2800
550/60 - 22.5	TL	16	-	167 A8/163 B	154 A8/150 B	STD	550	1260	547	3640	AG 16.00	-	10 FR	6970	7310	7630
													20 FR	6275	6575	6865
													30 FR	5580	5845	6105
													40 FR	4980	5220	5450
													50 FR	4480	4700	4875
													10 DW	4795	5025	5250
													20 DW	4315	4525	4725
													30 DW	3835	4020	4200
													40 DW	3425	3590	3750
													50 DW	3085	3230	3350

STD: Standard



**MAIN APPLICATION:
COMPACT LOADER**



AT 603

AT 603 is a bias agro-industrial tire for backhoe loaders, compact loaders and compact dumpers in digging and loading applications. AT 603 has been engineered to ensure great traction on drive wheels providing the best performance on and off the road. The AT 603 "special" version offers improved cut and chip resistance while the "HD" version is ideal for heavy-duty service.



SIZE	TYPE	PR	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)
							Rec./Flange Height	Alt./Flange Height					
18" 10.5/80 - 18	TL	10	-	131 A8	131 A8	STD	274	907	405	2657	W 9	W 8; 9	bar
													3.70
													km/h
													10 FR
													2730
													25 FR
													2320
													30 FR
													2185
													40 FR
1950													
10 DW													
1905													
25 DW													
1620													
30 DW													
1525													
40 DW													
1360													
10.5/80 - 18	TL	10	-	131 A8	131 A8	HD	274	907	405	2657	W 9	W 8; 9	bar
													3.70
													km/h
													10 FR
													2730
													25 FR
													2320
													30 FR
													2185
													40 FR
1950													
10 DW													
1905													
25 DW													
1620													
30 DW													
1525													
40 DW													
1360													
10.5/80 - 18	TL	10	-	131 A8	131 A8	SPL	274	907	405	2657	W 9	W 8; 9	bar
													3.70
													km/h
													10 FR
													2730
													25 FR
													2320
													30 FR
													2185
													40 FR
1950													
10 DW													
1905													
25 DW													
1620													
30 DW													
1525													
40 DW													
1360													
12.5/80 - 18	TL	12	-	-	-	STD	308	987	438	2892	W 9	11	bar
													3.70
													km/h
													10 FR
													3710
													25 FR
													3155
													30 FR
													2970
													40 FR
2650													
10 DW													
2590													
25 DW													
2200													
30 DW													
2070													
40 DW													
1850													

STD: Standard
HD: Heavy Duty
SPL: Special



**MAIN APPLICATION:
COMPACT LOADER**



AT 603

AT 603 is a bias agro-industrial tire for backhoe loaders, compact loaders and compact dumpers in digging and loading applications. AT 603 has been engineered to ensure great traction on drive wheels providing the best performance on and off the road. The AT 603 "special" version offers improved cut and chip resistance while the "HD" version is ideal for heavy-duty service.



AGRO-INDUSTRIAL
USE

TRACTION

SIZE	TYPE	PR	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
							↓	↓	↓	↓	Rec./Flange Height	Alt./Flange Height		
18" 12.5/80 - 18	TL	12	-	-	-	SPL	308	987	438	2892	W 9	11	bar	
													km/h	3.70
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
													10 DW	2590
													25 DW	2200
													30 DW	2070
													40 DW	1850
12.5/80 - 18	TL	16	-	148 A8	135 A8	STD	308	987	438	2892	W 9	11	bar	
													km/h	4.90
													10 FR	4410
													25 FR	3750
													30 FR	3530
													40 FR	3150
													10 DW	3050
													25 DW	2595
													30 DW	2440
													40 DW	2180
12.5/80 - 18	TL	18	-	150 A8	138 A8	STD	308	987	438	2892	W 9	11	bar	
													km/h	5.50
													10 FR	4690
													25 FR	3985
													30 FR	3750
													40 FR	3350
													10 DW	3305
													25 DW	2810
													30 DW	2645
													40 DW	2360

SPL: Special
STD: Standard



**MAIN APPLICATION:
COMPACT LOADER**



AT 621

AT 621 is suitable for backhoe loaders and compact loaders in all farming digging and loading operations. The AT 621 tire features an extra deep tread which ensures great cut resistance and higher durability. AT 621 is available in several versions to meet the most differing user requirements.



TRACTION



CUT RESISTANT



DURABILITY

SIZE	TYPE	PR	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)
							Rec./Flange Height	Alt./Flange Height					
15" 33 X 12.5 - 15	TT	8	-	-	-	STD	318	851	385	2493	10.00 F SDC	-	bar
													km/h
													10
16" 9.00 - 16	TT	16	137 A6	-	-	IND	260	925	-	-	6.50 H	6.00 G	bar
													km/h
													30
12.5/70 - 16	TL	8	-	-	-	STD	315	855	385	2584	10 LB	-	bar
													km/h
													10
12.5/70 - 16	TL	14	-	-	-	STD	315	855	385	2584	10 LB	-	bar
													km/h
													10
18" 12.5/80 - 18	TT	12	-	142 A8	129 A8	STD	308	987	438	2892	W 9	11.0	bar
													km/h
													10 FR
													25 FR
													30 FR
													40 FR
													10 DW
													25 DW
													30 DW
													40 DW
12.5/80 - 18	TL	12	-	142 A8	129 A8	STD	308	987	438	2892	W 9	11.0	bar
													km/h
													10 FR
													25 FR
													30 FR
													40 FR
													10 DW
													25 DW
													30 DW
													40 DW
12.5/80 - 18	TL	12	-	142 A8	129 A8	SPL	308	987	438	2892	W 9	11	bar
													km/h
													10 FR
													25 FR
													30 FR
													40 FR
													10 DW
													25 DW
													30 DW
													40 DW

STD: Standard
IND: Industrial
SPL: Special



**MAIN APPLICATION:
COMPACT LOADER**



AT 621

AT 621 is suitable for backhoe loaders and compact loaders in all farming digging and loading operations. The AT 621 tire features an extra deep tread which ensures great cut resistance and higher durability. AT 621 is available in several versions to meet the most differing user requirements.



TRACTION



CUT RESISTANT



DURABILITY

SIZE	TYPE	PR	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
							Rec./Flange Height	Alt./Flange Height						
18" 12.5/80 - 18	TT	16	-	148 A8	135 A8	STD	308	987	438	2892	W 9	11.0	bar	
													4.90	
													km/h	
													10 FR	
													4410	
													25 FR	
													3750	
													30 FR	
													3530	
													40 FR	
3150														
10 DW														
3050														
25 DW														
2595														
30 DW														
2440														
40 DW														
2180														
12.5/80 - 18	TL	16	-	148 A8	135 A8	IND HD	308	987	465	2928	W 9	11.0	bar	
													4.90	
													km/h	
													10 FR	
													4410	
													25 FR	
													3750	
													30 FR	
													3530	
													40 FR	
3150														
10 DW														
3050														
25 DW														
2595														
30 DW														
2440														
40 DW														
2180														
15.5/60 - 18	TL	10	-	-	-	STD	400	950	428	2871	W 13	-	bar	
													2.60	
15.5/70 - 18 (400/70 - 18)	TL	10	-	-	-	STD	400	1030	474	3111	W 13	-	bar	
													2.60	
20" 17.5/65 - 20	TL	10	-	-	-	STD	450	1090	490	3294	W 14 L	-	bar	
													2.40	
													km/h	
42 X 17 - 20	TT	10	-	-	-	STD	432	1073	480	3198	14.00TGSDC	-	bar	
													3.00	
													km/h	
400/70 - 20	TL	-	149 A8	-	-	STD	405	1090	-	-	13	12 SDC; 13 SDC; 14	bar	
													4.00	
													km/h	
													40	3250

STD: Standard
IND HD: Industrial Heavy Duty



**MAIN APPLICATION:
COMPACT LOADER**



AT 621

AT 621 is suitable for backhoe loaders and compact loaders in all farming digging and loading operations. The AT 621 tire features an extra deep tread which ensures great cut resistance and higher durability. AT 621 is available in several versions to meet the most differing user requirements.



TRACTION



CUT RESISTANT



DURABILITY

SIZE	TYPE	PR	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)		
											Rec./Flange Height	Alt./Flange Height			
24"	16.9 - 24	TL	12	149 A8	-	-	IND	450	1302	582	3776	DW 15 L	DW 14 L	bar	2.60
														km/h	
														40	
24"	17.5L - 24	TL	8	139 A8	-	-	STD	450	1255	563	3640	DW 15 L	DW 14 L	bar	1.70
														km/h	
														40	
24"	19.5L - 24	TL	12	151 A8	-	-	STD	482	1305	587	3936	DW 16 L	-	bar	2.30
													km/h		
													40	3450	
26"	18.4 - 26	TL	12	156 A8	-	-	STD	480	1425	636	4133	DW 16 L	DW 15 L	bar	2.50
														km/h	
														40	
28"	16.9 - 28	TT	12	152 A8	-	-	IND	450	1410	645	4247	DW 15 L	DW 14 L	bar	2.60
														km/h	
														40	
28"	16.9 - 28	TL	12	152 A8	-	-	IND	450	1410	645	4247	DW 15 L	DW 14 L	bar	2.60
														km/h	
														40	
30"	16.9 - 30	TL	12	153 A8	-	-	IND	450	1460	670	4398	DW 15 L	DW 14 L	bar	2.60
														km/h	
														40	

STD: Standard
IND: Industrial



**MAIN APPLICATION:
COMPACT LOADER**



AT 625

AT 625 is suitable for backhoe loaders and compact loaders in all farming digging and loading operations. Its extra deep tread ensures increased puncture resistance and durability. AT 625 features excellent traction and stability as well as improved cut and chip resistance.



TRACTION



HIGH PUNCTURE
RESISTANCE



EXTRA
DEEP TREAD



CUT & CHIP
RESISTANCE



CUT RESISTANT



STABILITY

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 40 KM/H	
									Rec./Flange Height	Alt./Flange Height		
											bar	max load (kg)
24" 14.9 - 24	TT	12	145 A8	STD	380	1265	575	3646	DW 13	DW 11; DW 12; DW 13 L	2.90	2900
14.9 - 24	TL	12	145 A8	STD	380	1265	575	3646	DW 13	DW 11; DW 12; DW 13 L	2.90	2900
28" 16.9 - 28	TT	12	152 A8	IND	450	1415	642	4160	DW 15 L	DW 14 L	2.60	3550
16.9 - 28	TL	12	152 A8	IND	450	1415	642	4160	DW 15 L	DW 14 L	2.60	3550

STD: Standard
IND: Industrial



**MAIN APPLICATION:
COMPACT LOADER**



CON STAR

CON STAR is particularly suitable for backhoe loaders, compact loaders and telehandlers in digging and loading applications. It features high load capacity along with excellent vertical and horizontal stability. CON STAR has been made of a cut-and-chip-resistant compound contributing to an extended tire life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 40 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
18" 340/80 - 18 (12.5/80 - 18)	TL	-	143 A8	IND	350	1015	460	3075	11	12; 11 SDC; 12 SDC; W 10; W 11	4.00	2725
20" 340/80 - 20 (12.5/80 - 20)	TL	-	144 A8	IND	350	1065	491	3272	11	12; 11 SDC; 12 SDC; W 10; W 11	4.00	2800
380/75 - 20 (14.5 - 20)	TL	-	148 A8	IND	385	1080	500	3273	W 12	W 11; 12 SDC; 12; W 13; 13 SDC; 13	4.00	3150
400/70 - 20 (16.0/70 - 20)	TL	-	156 A8	IND	405	1080	501	3303	13	12 SDC; 13 SDC; 14	5.00	4000
400/70 - 20 (16.0/70 - 20)	TL	16	149 A8	IND	405	1080	501	3303	13	12 SDC; 13 SDC; 14	4.00	3250
24" 400/70 - 24 (16.0/70 - 24)	TL	-	158 A8	IND	395	1175	-	-	13	DW 12; 13 SDC; DW 13; DW 13 L; DW 14 L	5.00	4250
400/80 - 24 (15.5/80 - 24)	TL	20	162 A8	STD	405	1250	570	3781	DW 13	DW 12; DW 13 L; DW 14 L	5.00	4750
440/80 - 24 (17.0/80 - 24)	TL	22	168 A8	IND	455	1315	610	3986	DW 14 L	DW 13; DW 13 L; DW 15 L	5.00	5600
460/70 - 24 (17.5L - 24)	TL	-	159 A8	IND	460	1250	-	-	DW 15 L	DW 14 L; DW 16 L	4.00	4375
500/70 - 24 (19.5L - 24)	TL	-	164 A8	IND	505	1300	579	3926	DW 16 L	DW 15 L; DW 18 L	4.00	5000
26" 480/80 - 26 (18.4 - 26)	TL	-	160 A8	IND	490	1410	643	4272	DW 15 L	DW 16 L	3.20	4500
28" 440/80 - 28 (16.9 - 28)	TL	-	156 A8	IND	450	1420	632	4299	DW 14 L	DW 13; DW 13 L; DW 15 L	3.20	4000

STD: Standard
IND: Industrial



**MAIN APPLICATION:
COMPACT LOADER**



MP 570

MP 570 is a road-oriented and agro-industrial tire, which is suitable for excavators and compact loaders. This tire provides good traction as well as excellent self-cleaning properties in all operating conditions.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)	
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	↓	
											bar	kg
18" 12.5 - 18	TL	10	-	STD	308	990	450	2950	11	12 SDC	3.00	1930
											80	2000
											50	
12.5 - 18	TL	12	-	STD	308	990	450	2950	11	12 SDC	3.50	2030
											80	2180
											50	
20" 12.5 - 20	TL	10	-	STD	335	1050	480	3130	11	12 SDC	3.00	1850
											80	2065
											50	
12.5 - 20	TL	12	-	STD	325	1040	475	3090	11	12 SDC	3.50	2060
											80	2300
											50	
14.5 - 20	TL	12	-	STD	360	1116	505	3325	11	12 SDC	3.00	2430
											65	2500
											50	

STD: Standard



**MAIN APPLICATION:
COMPACT LOADER**



MP 590

MP 590 is an agro-industrial tire suitable for loading operations with compact loaders, telehandlers and forklifts. This tire provides good traction and excellent stability as well as high load capacity to enhance productivity.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
					Rec./Flange Height	Alt./Flange Height						
22.5" 18 - 22.5 (445/65 - 22.5)	TL	16	-	STD	480	1190	530	3534	14.0	-	↓	
											bar	5.50
											km/h	4875
											30 DW	5450
18 - 22.5 (445/65 - 22.5)	TL	20	-	STD	480	1190	530	3534	14.0	-	bar	
											km/h	7.50
											40 DW	5800
											30 DW	6500

STD: Standard



**MAIN APPLICATION:
COMPACT LOADER**



MP 600

MP 600 is a road-oriented and agro-industrial tire, suitable for loading operations with compact loaders and telehandlers. This tire provides good traction and excellent stability along with an extended product life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)	
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	↓	
18" 10.5 - 18	TL	10	-	STD	272	920	420	2740	9	9 SDC	bar	3.75
											km/h	
											40 DW	1950
12.5 - 18	TL	10	-	STD	308	990	450	2950	11	12 SDC	bar	3.00
											km/h	
											40 DW	2060
12.5 - 18	TL	12	-	STD	308	990	450	2950	11	12 SDC	bar	3.50
											km/h	
											40 DW	2300
20" 400/70 - 20 (16.0/70 - 20)	TL	14	-	STD	405	1085	-	-	13 SDC	12	bar	4.00
											km/h	
											40 DW	3550
24" 400/70 - 24 (16.0/70 - 24)	TL	10	-	STD	405	1185	545	3530	13 SDC	12	bar	2.50
											km/h	
											40 DW	2975
400/70 - 24 (16.0/70 - 24)	TL	14	-	STD	405	1185	545	3530	13 SDC	12	bar	3.50
											km/h	
											40 DW	3650
400/70 - 24 (16.0/70 - 24)	TL	14	-	SPL	405	1185	545	3530	13 SDC	12	bar	3.50
											km/h	
											40 DW	3650
400/70 - 24 (16.0/70 - 24)	TL	18	-	STD	405	1185	545	3530	13	12	bar	4.50
											km/h	
											40 DW	4250
											50 DW	4125

STD: Standard
SPL: Special



MAIN APPLICATION:
COMPACT LOADER



MULTIMAX MP 522

MULTIMAX MP 522 is the BKT multi-purpose tire developed for manifold agro-industrial applications. It is suitable for all digging and loading operations on vehicles such as telehandlers, compact loaders and backhoe loaders. Stability and high load capacity are its strengths as well as outstanding puncture resistance. Multimax MP 522 is the right response for all agro-industrial heavy-duty needs.



SIZE	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	RIM		LOAD CAPACITY (KG/TIRE)												
								Rec.	Alt.													
18"	280/80 R 18 IND	132 A8/B	STD	282	907	421	2727	350	9; 9 SDC	-	LOAD CAPACITY (KG/TIRE)											
											bar											
											km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4		
											50	960	1140	1300	1480	1660	1780	2000	-	-		
											40	960	1140	1300	1480	1660	1780	2000	-	-		
											30	1030	1220	1395	1585	1780	1905	2140	-	-		
											25	1070	1270	1445	1645	1845	1980	2220	-	-		
											10 Cyc.	1170	1440	1695	1950	2220	2415	2730	2880	3000		
											Static	1795	2210	2600	2990	3405	3705	4190	4420	4600		
											18"	340/80 R 18 IND (12.5/80 R 18)	143 A8/B	STD	343	1001	458	3002	475	11; 11 SDC; W 11	W 10; 12; 12 SDC	LOAD CAPACITY (KG/TIRE)
bar																						
km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4													
50	1310	1555	1775	2020	2265	2430	2725	-	-													
40	1310	1555	1775	2020	2265	2430	2725	-	-													
30	1405	1665	1900	2165	2425	2600	2920	-	-													
25	1455	1725	1970	2240	2515	2695	3025	-	-													
10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090													
Static	2450	3010	3545	4080	4640	5050	5710	6020	6270													
20"	340/80 R 20 IND	144 A8/B	STD	343	1052	481	3212	500	11	W10; 11 SDC; W11; 12; 12 SDC												LOAD CAPACITY (KG/TIRE)
											bar											
											km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4		
											50	1345	1600	1820	2075	2325	2495	2800	-	-		
											40	1345	1600	1820	2075	2325	2495	2800	-	-		
											30	1440	1710	1950	2220	2490	2670	3000	-	-		
											25	1495	1775	2025	2305	2585	2770	3110	-	-		
											10 Cyc.	1640	2020	2375	2730	3110	3385	3825	4035	4200		
											Static	2515	3095	3640	4190	4770	5185	5865	6185	6440		
											20"	380/75 R 20 IND (14.5 R 20)	148 A8/B	STD	384	1074	483	3251	500	W 12	W 11; 11; 12	LOAD CAPACITY (KG/TIRE)
bar																						
km/h	1.6	2.0	2.4	2.8	3.2	3.6	3.8	4.0	4.2	4.4												
50	1500	1770	2040	2305	2575	2860	3005	3150	-	-												
40	1500	1770	2040	2305	2575	2860	3005	3150	-	-												
30	1610	1900	2195	2490	2780	3075	3220	3370	-	-												
25	1670	1975	2280	2585	2890	3195	3350	3500	-	-												
10 Cyc.	1850	2260	2670	3080	3490	3900	4110	4315	4520	4730												
Static	2840	3470	4100	4730	5360	5990	6305	6620	6935	7250												
20"	400/70 R 20 IND (16.0/70 R 20)	149 A8/B	STD	404	1068	476	3199	525	13	12 SDC; 13 SDC; 14												LOAD CAPACITY (KG/TIRE)
											bar											
											km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4		
											50	1560	1855	2115	2405	2700	2895	3250	-	-		
											40	1560	1855	2115	2405	2700	2895	3250	-	-		
											30	1675	1985	2265	2580	2890	3100	3480	-	-		
											25	1735	2060	2350	2675	3000	3215	3610	-	-		
											10 Cyc.	1905	2340	2755	3170	3610	3925	4440	4680	4875		
											Static	2920	3590	4225	4860	5535	6020	6805	7180	7475		

STD: Standard



MAIN APPLICATION:
COMPACT LOADER



MULTIMAX MP 522

MULTIMAX MP 522 is the BKT multi-purpose tire developed for manifold agro-industrial applications. It is suitable for all digging and loading operations on vehicles such as telehandlers, compact loaders and backhoe loaders. Stability and high load capacity are its strengths as well as outstanding puncture resistance. Multimax MP 522 is the right response for all agro-industrial heavy-duty needs.



SIZE	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	RIM		LOAD CAPACITY (KG/TIRE)																									
								Rec.	Alt.	↓																									
										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
										km/h	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4											
24" 400/70 R 24 IND	152 A8/B	STD	404	1170	533	3527	575	13	DW 12; 13 SDC; DW 13; DW 13 L; DW 14 L	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
										km/h	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4											
										50	1705	2025	2310	2630	2950	3160	3550	-	-																
										40	1705	2025	2310	2630	2950	3160	3550	-	-																
										30	1825	2170	2470	2815	3155	3385	3800	-	-																
										25	1895	2250	2565	2920	3275	3515	3945	-	-																
										10 Cyc.	2080	2560	3010	3465	3945	4290	4850	5115	5325																
Static	3185	3920	4615	5310	6045	6575	7435	7840	8165																										
400/80 R 24 IND	162 A8/B	STD	404	1250	553	3778	600	DW 13	DW 12; DW 13 L; DW 14 L	bar	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4											
										km/h	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4											
										50	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-											
										40	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-											
										30	1985	2340	2750	3105	3460	3590	3770	4170	4515	4745	4860	5085	-	-											
										25	2060	2430	2850	3220	3590	3725	3910	4330	4690	4925	5040	5275	-	-											
										10 Cyc.	2280	2785	3280	3850	4350	4600	4845	5280	5845	6090	6330	6655	6810	7125											
Static	3500	4270	5030	5900	6670	7050	7430	8100	8960	9340	9710	10205	10445	10925																					
440/80 R 24 IND	161 A8/B	STD	441	1314	586	3956	625	DW 14 L	DW 13; DW 13 L; DW 15 L	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
										km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
										50	2220	2640	3010	3425	3840	4120	4625	-	-																
										40	2220	2640	3010	3425	3840	4120	4625	-	-																
										30	2380	2825	3220	3665	4110	4410	4950	-	-																
										25	2465	2930	3340	3800	4265	4575	5135	-	-																
										10 Cyc.	2710	3335	3925	4515	5140	5590	6320	6665	6940																
Static	4150	5110	6015	6920	7875	8570	9685	10215	10640																										
460/70 R 24 IND (17.5L R 24)	159 A8/B	STD	465	1250	568	3766	600	DW 15 L	DW 14 L; DW 16 L	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
										km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
										50	2100	2495	2845	3240	3635	3895	4375	-	-																
										40	2100	2495	2845	3240	3635	3895	4375	-	-																
										30	2250	2675	3050	3470	3890	4170	4685	-	-																
										25	2335	2775	3160	3600	4035	4330	4860	-	-																
										10 Cyc.	2565	3155	3710	4270	4860	5285	5975	6305	6565																
Static	3930	4835	5690	6545	7450	8105	9160	9665	10065																										
500/70 R 24 IND (19.5L R 24)	164 A8/B	STD	503	1310	595	3890	625	DW 16 L	DW 15 L; DW 18 L	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
										km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
										50	2400	2850	3250	3700	4150	4450	5000	-	-																
										40	2400	2850	3250	3700	4150	4450	5000	-	-																
										30	2570	3050	3480	3960	4445	4765	5350	-	-																
										25	2665	3165	3610	4110	4610	4940	5550	-	-																
										10 Cyc.	2925	3600	4240	4875	5550	6040	6825	7200	7500																
Static	4485	5520	6500	7475	8510	9260	10465	11040	11500																										

STD: Standard



MAIN APPLICATION:
COMPACT LOADER



MULTIMAX MP 522

MULTIMAX MP 522 is the BKT multi-purpose tire developed for manifold agro-industrial applications. It is suitable for all digging and loading operations on vehicles such as telehandlers, compact loaders and backhoe loaders. Stability and high load capacity are its strengths as well as outstanding puncture resistance. Multimax MP 522 is the right response for all agro-industrial heavy-duty needs.



SIZE	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	RIM		LOAD CAPACITY (KG/TIRE)												
								Rec.	Alt.													
24"	540/70 R 24 IND	168 A8/B	STD	530	1366	611	4133	650	DW 16 L	DW 18 L	bar											
											km/h											
											1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4			
											50	2690	3195	3640	4145	4650	4985	5600	-	-		
											40	2690	3195	3640	4145	4650	4985	5600	-	-		
											30	2880	3420	3900	4440	4980	5340	5995	-	-		
											25	2990	3550	4045	4605	5165	5540	6220	-	-		
10 Cyc.	3280	4035	4750	5460	6220	6765	7645	8065	8400													
Static	5025	6185	7280	8375	9535	10370	11725	12365	12880													
26"	480/80 R 26 IND	160 A8/B	STD	479	1428	638	4287	675	DW 15 L	DW 16 L	bar											
											km/h											
											1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6		
											50	2610	3060	3330	3555	3780	4005	4275	4500	-	-	
											40	2610	3060	3330	3555	3780	4005	4275	4500	-	-	
											30	2795	3275	3565	3805	4045	4290	4575	4815	-	-	
											25	2900	3400	3700	3950	4200	4450	4750	4995	-	-	
10 Cyc.	3175	3915	4255	4590	4995	5335	5670	6075	6415	6750												
Static	4865	6005	6525	7040	7660	8180	8695	9315	9835	10350												
28"	440/80 R 28 IND	156 A8/B	STD	441	1415	643	4278	675	DW 14 L	DW 13; DW 13 L; DW 15 L	bar											
											km/h											
											1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6		
											50	2300	2725	2940	3150	3360	3575	3790	4000	-	-	
											40	2300	2725	2940	3150	3360	3575	3790	4000	-	-	
											30	2480	2930	3155	3380	3605	3830	4055	4280	-	-	
											25	2570	3040	3270	3505	3740	3970	4205	4440	-	-	
10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000												
Static	4360	5330	5810	6295	6780	7265	7750	8230	8715	9200												

STD: Standard



MAIN APPLICATION:
COMPACT LOADER



RT 747 AGRO INDUSTRIAL

RT 747 AGRO INDUSTRIAL is a radial agro-industrial tire suitable for backhoe loaders, compact loaders and telehandlers. Its extra wide lugs provide excellent grip and great stability in lift operations. RT 747 AGRO INDUSTRIAL is the right answer to all general farming operations that need outstanding versatility.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)						
									Rec./Flange Height	Alt./Flange Height	↓						
											bar	1.2	1.6	2.0	2.4	2.8	3.2
24" 460/70 R 24 (17.5L R 24)	TL	-	152 A8/149 B	STD	465	1254	556	3840	DW 15 L	DW 14 L; DW 16 L	km/h	50	40	30	25	10 Cyc	Static
											1530	1885	2210	2570	2985	3250	
											1670	2060	2415	2805	3160	3550	
											1785	2205	2585	3000	3380	3800	
											1850	2285	2680	3115	3505	3940	
											2505	3090	3620	4205	4740	5325	
											3505	4325	5070	5890	6635	7455	
500/70 R 24 (19.5L R 24)	TL	-	157 A8/154 B	STD	485	1320	585	3949	DW 16 L	DW 15 L; DW 18 L	bar	1.2	1.6	2.0	2.4	2.8	3.0
											km/h	50	40	30	25	10 Cyc	Static
											1765	2175	2550	2965	3340	3750	
											1940	2395	2805	3260	3670	4125	
											2075	2560	3000	3490	3930	4415	
											2155	2655	3115	3620	4075	4580	
											2910	3590	4210	4890	5510	6190	
4075	5025	5890	6845	7710	8665												

STD: Standard



MAIN APPLICATION:
COMPACT LOADER



SNOW TRAC (A)

SNOW TRAC is particularly suitable for road applications in winter conditions with skid steers. It features excellent traction and is ideal for ice and snow operations. Its specially designed tread pattern eliminates slippage risks.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 10 KM/H		
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)	
16"	12.5/70 - 16	TL	6	-	STD	315	850	385	2550	10 LB	-	2.00	1410
	12.5/70 - 16	TL	10	-	STD	315	850	385	2550	10 LB	-	3.20	1855
16.5"	10 - 16.5	TL	6	-	STD	270	780	357	2340	8.25	-	3.10	1590
	10 - 16.5	TL	10	-	STD	270	780	357	2340	8.25	-	5.20	2135
	12 - 16.5	TL	6	-	STD	305	835	379	2505	9.75	-	2.80	1915
	12 - 16.5	TL	10	-	STD	305	835	379	2505	9.75	-	4.50	2540
18"	15.5/60 - 18	TL	10	-	STD	395	938	425	2814	W 13	-	2.60	2400
20"	17.5/65 - 20	TL	10	-	STD	445	1095	493	3285	W 14 L	-	2.40	3195

STD: Standard



MAIN APPLICATION:
LOADER



EARTHMAX SR 25 (G-2/L-2)

RADIAL OTR TIRES

EARTHMAX SR 25 (G-2/L-2) is an All Steel radial tire, which has been specially designed for motor graders and loaders operating in the most severe road construction or mining applications. Its non-directional tread design offers excellent self-cleaning properties in addition to traction and stability off the road.



SIZE	Type	Star rating	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)									
									Rec./Flange Height	Alt./Flange Height										
24" 14.00 R 24	TL	*	175 A2/153 A8	STD	359	1372	626	4146	8.00TG	9.00GR										
											↓									
											bar	2	2.25	2.5	2.75	3	3.25	3.5	3.75	5.25
		km/h	10	-	-	-	-	-	-	-	-	-	-	6700	6900					
		40	2240	2430	2650	2800	3000	3250	3350	3650	-	-	-	-	-					

STD: Standard



EARTHMAX SR 31

RADIAL OTR TIRES

EARTHMAX SR 31 is an All Steel radial tire specially designed for articulated dump trucks and wheel loaders. Its multiply steel belts provide extraordinary strength and stability, whilst the non-directional rigid block pattern stands for both excellent traction and maneuverability even on muddy ground. In addition to outstanding riding comfort, EARTHMAX SR 31 features a special tread compound which is particularly cut-and-heat resistant. The radial casing structure also provides reduced rolling resistance offering significant fuel savings.



SIZE	Type	Star rating	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)						
									Rec./Flange Height	Alt./Flange Height							
25" 23.5 R 25	TL	*/**	195 A2/185 B	CR	612	1607	711	4797	19.50/2.5	-							
											↓						
											bar	4	4.25	4.5	4.75	5.00	5.25
		km/h	10	10300	10600	11200	11500	12150	-								
		50	7500	7750	8250	8500	9000	9250	-								
26.5 R 25	TL	*/**	202 A2 / 193 B	CR	689	1742	766	5200	22.00/3.0	-							
											↓						
											bar	4.00	4.25	4.50	4.75	5.00	5.25
		km/h	10	12850	13200	14000	14500	15000	-								
		50	9500	9750	10300	10600	11200	11500	-								
26.5 R 25	TL	**	209 A2	CR	689	1742	766	5200	22.00/3.0	22.00/3.0 IF							
											↓						
											bar	5.25	5.50	5.75	6.00	6.25	6.50
		km/h	10	15500	16000	16500	17000	18000	18500								
		50	11500	11800	12500	12850	13600	14000	-								
29.5 R 25	TL	*/**	208 A2 / 200 B	CR	765	1861	818	5555	25.00/3.5	-							
											↓						
											bar	4.00	4.25	4.50	4.75	5.00	5.25
		km/h	10	15500	16000	17000	17500	18000	-								
		50	11500	11800	12500	12850	13600	14000	-								
29.5 R 25	TL	**	216 A2	CR	765	1861	818	5555	25.00/3.5	25.00/3.5 IF							
											↓						
											bar	5.25	5.50	5.75	6.00	6.25	6.50
		km/h	10	19000	19500	20000	20600	21200	22400								
		50	19000	19500	20000	20600	21200	22400	-								

CR: Cut Resistant



MAIN APPLICATION:
LOADER



EM 936 (E-2)

EM 936 has been specially designed for excavators and telehandlers in digging and loading operations. Besides, one size is particularly suitable for graders and loaders in grading, loading and transport applications. EM 936 features outstanding riding comfort and enhanced self-cleaning properties. It also ensures a high level of handling comfort and provides excellent traction even under heavy-duty service conditions. Its "special" version is made of a special compound.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)				
									Rec./Flange Height	Alt./Flange Height					
20"	16.0/70 - 20	TL	14	149 B/166 A2	STD	405	1090	480	3295	13 SDC	13	↓			
												bar		3.50	4.50
												km/h	50	10	3250
20"	16.0/70 - 20	TT/TL	14	149 B/166 A2	SPL	405	1090	480	3295	13 SDC	13	↓			
												bar		3.50	4.50
												km/h	50	10	3250
24"	16.0/70 - 24	TL	10	143 B/162 A2	STD	410	1190	575	3600	13 SDC	13 (DC)	↓			
												bar		2.50	3.20
												km/h	50	10	2725
24"	16.0/70 - 24 (405/70 - 24)	TL	14	152 B/169 A2	STD	410	1190	575	3600	13 SDC	13 (DC)	↓			
												bar		3.50	4.50
												km/h	50	10	3550
20 - 24 (22/70 - 24)	TL	12	158 B/173 A2	STD	535	1390	665	4205	16.00 T SDC	-	↓				
											bar		2.50	3.00	
											km/h	50	10	4250	-

STD: Standard
SPL: Special



EM 936 LOADER SPECIAL

EM 936 LOADER SPECIAL has been specially designed for telehandlers in loading applications. It features outstanding riding comfort and enhanced self-cleaning properties. It also ensures a high level of handling comfort and provides excellent traction even under heavy-duty service conditions.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 50 KM/H		
									Rec./Flange Height	Alt./Flange Height			
20"	16.0/70 - 20 (405/70 - 20)	TL	14	149 B	STD	405	1090	480	3295	11	12; 11 SDC; 12 SDC; W 10; W 11	↓	
												bar	max load (kg)

STD: Standard



MAIN APPLICATION:
LOADER



EM 937 (E-3/L-3)

EM 937 (E-3/L-3) has been specially designed for loaders and backhoe loaders in dig and load applications, depending on the size. It features excellent durability and provides cut and chip resistance.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)			
									Rec./Flange Height	Alt./Flange Height				
24"	14.00 - 24	TT	20	-	STD	375	1368	628	4050	10.00 W	-	bar	4.75	7.00
	50												4625	-
	10												-	8500
	14.00 - 24	TL	20	-	STD	375	1368	628	4050	10.00 W	-	bar	4.75	7.00
	50												4625	-
	10												-	8500
	14.00 - 24	TT	24	-	STD	375	1368	628	4050	10.00 W	-	bar	5.75	8.50
	50												5150	-
	10												-	9500
	14.00 - 24	TL	24	-	STD	375	1368	628	4050	10.00 W	-	bar	5.75	8.50
50												5150	-	
10												-	9500	
14.00 - 24	TT	28	-	STD	375	1368	628	4050	10.00 W	-	bar	6.50	9.25	
50												5600	-	
10												-	10000	
14.00 - 24	TL	28	-	STD	375	1368	628	4050	10.00 W	-	bar	6.50	9.25	
50												5600	-	
10												-	10000	
14.00 - 24	TL	28	-	STD	375	1368	628	4050	10.00 WA	-	bar	6.50	9.25	
50												5600	-	
10												-	10000	
14.00 - 24	TT	32	-	STD	375	1368	628	4050	10.00 W	-	bar	7.25	10.00	
50												6030	-	
10												-	10470	
14.00 - 24	TL	32	-	STD	375	1368	628	4050	10.00 W	-	bar	7.25	10.00	
50												6030	-	
10												-	10470	

STD: Standard



**MAIN APPLICATION:
LOADER**



EM 937 (E-3/L-3)

EM 937 (E-3/L-3) has been specially designed for loaders and backhoe loaders in dig and load applications, depending on the size. It features excellent durability and provides cut and chip resistance.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)				
									Rec./Flange Height	Alt./Flange Height					
25"	14.00 - 25	TT	12	-	STD	375	1368	620	4105	10.00/1.5	-	bar	2.75	4.25	
												km/h	50	3350	-
												10	-	6300	
	14.00 - 25	TT	20	-	STD	375	1368	620	4105	10.00/1.5	-	bar	4.75	7.00	
												km/h	50	4625	-
												10	-	8500	
	14.00 - 25	TL	20	-	STD	375	1368	620	4105	10.00/1.5	-	bar	4.75	7.00	
												km/h	50	4625	-
												10	-	8500	
14.00 - 25	TT	20	-	ASB	375	1368	620	4105	10.00/1.5	-	bar	4.75	7.00		
											km/h	40	4765	-	
											10	-	8500		
14.00 - 25	TT	20	-	AB	375	1368	620	4105	10.00/1.5	-	bar	4.75	7.00		
											km/h	40	4765	-	
											10	-	8500		
14.00 - 25	TT	20	-	SB	375	1368	620	4105	10.00/1.5	-	bar	4.75	7.00		
											km/h	40	4765	-	
											10	-	8500		
14.00 - 25	TT	24	-	STD	375	1368	620	4105	10.00/1.5	-	bar	5.75	8.50		
											km/h	50	5150	-	
											10	-	9500		
14.00 - 25	TL	24	-	STD	375	1368	620	4105	10.00/1.5	-	bar	5.75	8.50		
											km/h	50	5150	-	
											10	-	9500		

STD: Standard
 ASB: Aramid + Steel Belted
 AB: Aramid Belted
 SB: Steel Belted



MAIN APPLICATION:
LOADER



GR 288 (G-2/L-2)

GR 288 (G-2/L-2) is a versatile bias-ply tire for graders or loaders. It is ideal for use in construction, site preparation, road building, and other soft or muddy environments. The self-cleaning tread pattern provides excellent traction, and you can expect a long tire life as a result of the special cut-and-chip-resistant compound.



SELF-CLEANING

TRACTION

CUT & CHIP
RESISTANCE

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)			
									Rec./Flange Height	Alt./Flange Height				
											↓			
25" 15.5 - 25	TL	12	-	STD	385	1270	572	3772	12.00/1.3	12.00/1.3 (DC)	bar	2.50	4.00	
											km/h	40	2650	-
											10	-	5600	
17.5 - 25	TL	12	-	STD	445	1330	596	3950	14.00/1.5	14.00/1.5 (DC); 14.00/1.3 (DC)	bar	2.00	3.50	
											km/h	40	2900	-
											10	-	6150	
17.5 - 25	TL	16	-	STD	445	1330	596	3950	14.00/1.5	14.00/1.3 (DC)	bar	2.75	4.75	
											km/h	40	3350	-
											10	-	7300	
17.5 - 25	TL	20	-	STD	445	1330	596	3950	14.00/1.5	14.00/1.3 (DC)	bar	3.25	5.75	
											km/h	40	3650	-
											10	-	8250	
17.5 - 25	TT	20	-	DB HD	445	1330	596	3950	14.00/1.5	14.00/1.3 (DC)	bar	3.25	5.75	
											km/h	40	3650	-
											10	-	8250	
20.5 - 25	TL	16	-	STD	520	1480	656	4396	17.00/2.0	17.00/1.7	bar	2.25	3.50	
											km/h	40	4000	-
											10	-	8250	
20.5 - 25	TL	20	-	STD	520	1480	656	4396	17.00/2.0	17.00/1.7	bar	2.75	4.50	
											km/h	40	4500	-
											10	-	9500	
23.5 - 25	TL	16	-	STD	595	1610	708	4782	19.50/2.5	-	bar	2.00	3.00	
											km/h	40	4750	-
											10	-	9500	
23.5 - 25	TL	20	-	STD	595	1610	708	4782	19.50/2.5	-	bar	2.50	3.75	
											km/h	40	5450	-
											10	-	10900	

STD: Standard
DB HD: Dual Bead Heavy Duty



MAIN APPLICATION:
LOADER



LOADER GRIP (L-3)

LOADER GRIP (L-3) is a bias-ply tire specially designed for loaders. The tread compound provides cut-and-chip-resistant properties and suites best for loading and dozing operations.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 10 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
25" 14.00 - 25	TT	20	-	STD	375	1368	630	4050	10.00/1.5	-	7.00	8500
17.5 - 25	TT	12	-	STD	440	1345	622	3980	14.00/1.5	-	3.50	6150
17.5 - 25	TT/TL	16	-	STD	440	1345	622	3980	14.00/1.5	-	4.75	7300
17.5 - 25	TT	20	-	DB	440	1345	622	3980	14.00/1.5	-	5.75	8250
20.5 - 25	TT/TL	16	-	STD	540	1490	685	4410	17.00/2.0	-	3.50	8250
20.5 - 25	TT/TL	20	-	STD	540	1490	685	4410	17.00/2.0	-	4.50	9500
23.5 - 25	TT/TL	16	-	STD	600	1640	749	4855	19.50/2.5	-	3.00	9500
23.5 - 25	TT/TL	20	-	STD	600	1640	749	4855	19.50/2.5	-	3.75	10900
23.5 - 25	TL	24	-	STD	600	1640	749	4855	19.50/2.5	-	4.75	12500
26.5 - 25	TL	28	-	STD	680	1740	796	5150	22.00/3.0	-	4.75	15500
26.5 - 25	TL	32	-	STD	680	1740	796	5150	22.00/3.0	-	5.50	17000
29.5 - 25	TL	28	-	STD	760	1860	849	5544	25.00/3.5	-	4.25	17500
29.5 - 25	TL	32	-	STD	760	1860	849	5544	25.00/3.5	-	5.00	19250

STD: Standard
DB: Dual Bead



MAIN APPLICATION:
LOADER



ROCK GRIP (L-4)

ROCK GRIP (L-4) is a bias-ply tire designed for wheel loader operations in severe loading service and on rough ground conditions. Its specially designed, cut-and-chip-resistant tread compound minimizes punctures thereby reducing machine downtime. The (L-4) tread depth provides an extended tire life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 10 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
25" 14.00 - 25	TT	24	-	STD	375	1410	649	4173	10.00/1.5	-	8.50	9500
14.00 - 25	TL	24	-	STD	375	1410	649	4173	10.00/1.5	-	8.50	9500
14.00 - 25	TT	28	-	STD	375	1410	649	4173	10.00/1.5	-	9.25	10000
14.00 - 25	TL	28	-	STD	375	1410	649	4173	10.00/1.5	-	9.25	10000
14.00 - 25	TL	32	-	STD	375	1410	649	4173	10.00/1.5	-	10.00	10465

STD: Standard



MAIN APPLICATION:
LOADER



BK-LOADER 53

BK-LOADER 53 is an aramid-belted tire designed for loaders in industrial applications. The unique tread design provides best lateral stability in addition to extended tread wear and extraordinary resistance against cuts and punctures thanks to the extra deep tread. BK-LOADER 53 features outstanding self-cleaning properties as well as excellent grip and traction on both wet and dry surfaces. This tire is particularly suitable for recycling operations.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)										
									Rec./Flange Height	Alt./Flange Height	↓										
											bar	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	
20" 405/70 R 20	TL	-	155A2/151A4	STD	407	1097	511	3339	13	13 SDC	km/h	20 TRANSPORT	1210	1520	1805	2090	2375	2640	2905	3170	3450
											10 LOADING	1375	1725	2050	2375	2700	3000	3300	3600	3875	
											Static	2200	2750	3275	3800	4325	4800	5300	5750	6200	

STD: Standard



MAIN APPLICATION:
LOADER



SNOW TRAC (B)

SNOW TRAC is particularly suitable for road applications in winter conditions with skid steers. It features excellent traction and is ideal for ice and snow operations. Its specially designed tread pattern eliminates slippage risks.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
									Rec./Flange Height	Alt./Flange Height		
24" 16.9 - 24	TL	12	-	STD	429	1310	590	3930	DW 15 L	DW 14 L	bar	
											km/h	2.60
18.4 - 24	TL	12	-	STD	475	1375	625	4089	DW 16 L	DW 15 L	bar	
											km/h	2.50
25" 15.5 - 25	TL	12	-	STD	395	1280	569	3818	12.00/1.3	-	bar	
											km/h	4.00
17.5 - 25	TL	12	-	STD	445	1348	608	4044	14.00/1.5	-	bar	
											km/h	3.50
17.5 - 25	TL	16	-	STD	445	1348	608	4044	14.00/1.5	-	bar	
											km/h	4.75
20.5 - 25	TL	16	-	STD	537	1492	652	4423	17.00/2.0	17.00/1.7	bar	
											km/h	3.50
23.5 - 25	TL	16	-	STD	612	1630	693	4800	19.50/2.5	-	bar	
											km/h	3.00
											bar	
											km/h	9500

STD: Standard



MAIN APPLICATION:
LOADER



XL GRIP (L-3)

XL GRIP (L-3) is a wide-base bias-ply tire for loaders designed to minimize cuts and punctures in heavy-duty loading applications. It provides exceptional traction as well as an extended tire life.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)				
									Rec./Flange Height	Alt./Flange Height		bar	km/h	50	10
20" 16.0/70 - 20	TL	16	-	STD	405	1090	480	3295	13	SDC	-	bar	4.00	5.15	
												km/h	50	3515	-
												10	-	5735	-
25" 15.5 - 25	TL	12	-	STD	402	1285	573	3767	12.00/1.3	12.00/1.3 (DC)	-	bar	2.50	4.00	
												km/h	50	3250	-
												10	-	5600	-
17.5 - 25	TL	12	-	STD	435	1345	622	3980	14.00/1.5	-	-	bar	2.25	3.50	
												km/h	50	3650	-
												10	-	6150	-
17.5 - 25	TL	16	-	STD	435	1345	622	3980	14.00/1.5	-	-	bar	3.00	4.75	
												km/h	50	4250	-
												10	-	7300	-
17.5 - 25	TL	20	-	STD	435	1345	622	3980	14.00/1.5	-	-	bar	4.00	5.75	
												km/h	50	5000	-
												10	-	8250	-
17.5 - 25	TL	20	-	DB	435	1345	622	3980	14.00/1.5	-	-	bar	4.00	5.75	
												km/h	50	5000	-
												10	-	8250	-
17.5 - 25	TT	20	-	DB	435	1345	622	3980	14.00/1.5	-	-	bar	4.00	5.75	
												km/h	50	5000	-
												10	-	8250	-
20.5 - 25	TL	12	-	STD	530	1485	682	4395	17.00/2.0	-	-	bar	2.00	2.50	
												km/h	50	4500	-
												10	-	6700	-
20.5 - 25	TL	16	-	STD	530	1485	682	4395	17.00/2.0	-	-	bar	2.75	3.50	
												km/h	50	5450	-
												10	-	8250	-
20.5 - 25	TL	20	-	STD	530	1485	682	4395	17.00/2.0	-	-	bar	3.25	4.50	
												km/h	50	6000	-
												10	-	9500	-
20.5 - 25	TL	24	-	STD	530	1485	682	4395	17.00/2.0	-	-	bar	4.00	5.25	
												km/h	50	6700	-
												10	-	10300	-

STD: Standard
DB: Dual Bead



MAIN APPLICATION:
LOADER



XL GRIP (L-3)

XL GRIP (L-3) is a wide-base bias-ply tire for loaders designed to minimize cuts and punctures in heavy-duty loading applications. It provides exceptional traction as well as an extended tire life.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)			
									Rec./Flange Height	Alt./Flange Height				
25" 23.5 - 25	TL	16	-	STD	600	1625	742	4810	19.50/2.5	-	bar	2.25	3.00	
											km/h	50	6150	-
											10	-	9500	-
23.5 - 25	TL	20	-	STD	600	1625	742	4810	19.50/2.5	-	bar	3.00	3.75	
											km/h	50	7300	-
											10	-	10900	-
23.5 - 25	TL	24	-	STD	600	1625	742	4810	19.50/2.5	-	bar	3.50	4.75	
											km/h	50	8000	-
											10	-	12500	-
23.5 - 25	TL	24	-	AB HD	600	1625	742	4810	19.50/2.5	-	bar	3.50	4.75	
											km/h	50	8000	-
											10	-	12500	-
26.5 - 25	TL	20	-	STD	680	1740	796	5150	22.00/3.0	-	bar	2.50	3.50	
											km/h	50	8250	-
											10	-	13200	-
26.5 - 25	TL	28	-	STD	680	1740	796	5150	22.00/3.0	-	bar	3.50	4.75	
											km/h	50	10000	-
											10	-	15500	-
26.5 - 25	TL	32	-	STD	680	1740	796	5150	22.00/3.0	-	bar	4.25	5.50	
											km/h	50	11200	-
											10	-	17000	-
29.5 - 25	TL	28	-	STD	760	1860	849	5544	25.00/3.5	-	bar	3.25	4.25	
											km/h	50	11500	-
											10	-	17500	-
29.5 - 25	TL	32	-	STD	760	1860	849	5544	25.00/3.5	-	bar	3.75	5.00	
											km/h	50	12500	-
											10	-	19250	-

STD: Standard
AB HD: Aramid Belted Heavy Duty



MAIN APPLICATION:
COMPACTOR




PAC MASTER

PAC MASTER is a bias tire for compactors. It shows high stability and ensures an extended tire life-cycle. It is made of a special compound that provides particular heat resistance.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)		
									Rec./Flange Height	Alt./Flange Height			
15"	7.50 - 15	TT	6	-	STD	225	790	-	-	6.0	6.5	bar	4.00
												km/h	1850
												10	1500
	7.50 - 15	TT	12	-	STD	225	790	-	-	6.0	6.5	bar	7.50
												km/h	2650
												10	2120
	7.50 - 15	TT	14	-	STD	225	790	-	-	6.0	6.5	bar	8.75
												km/h	2900
												10	2300
	8.5/90 - 15 K	TL	6	-	STD	230	785	-	-	6.0	5.50 F	bar	3.50
												km/h	1800
												10	1450
9.5/65 - 15	TT/TL	6	-	STD	235	675	-	-	7.0	-	bar	3.25	
											km/h	1320	
											10	1060	
205/60 - 15	TL	6	-	STD	200	631	-	-	6.0	7.0	bar	3.25	
											km/h	1060	
											10	850	
16"	7.50 - 16	TT	14	-	STD	225	815	-	-	6.0	6.5	bar	8.75
												km/h	2900
												10	2300
	10.5/80 - 16	TL	6	-	STD	275	810	382	2480	8.0	-	bar	4.50
												km/h	1850
												10	1500
	10.5/80 - 16	TL	14	-	STD	275	810	382	2480	8.0	-	bar	6.00
												km/h	2775
												10	2250
20"	9.00 - 20	TT	12	-	STD	275	1016	471	3107	7.0	7.5	bar	6.25
												km/h	4000
												10	3150
	9.00 - 20	TT	14	-	STD	275	1016	471	3107	7.0	7.5	bar	7.25
												km/h	4375
												10	3450
	9.00 - 20	TT	16	-	STD	275	1016	471	3107	7.0	7.5	bar	8.25
												km/h	4750
												10	3750

STD: Standard



**MAIN APPLICATION:
COMPACTOR**



PAC MASTER

PAC MASTER is a bias tire for compactors. It shows high stability and ensures an extended tire life-cycle. It is made of a special compound that provides particular heat resistance.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)	
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height		
20" 11.00 - 20	TT	16	-	STD	291	1070	494	3310	8.0	8.5	bar	
											7.25	
											10	5450
											15	4375
11.00 - 20	TT	18	-	STD	291	1070	494	3310	8.0	8.5	bar	
											8.25	
											10	5800
											15	4625
14/70 - 20	TT	12	-	STD	380	975	-	-	11 TG	-	bar	
											4.50	
											10	4000
											15	3150

STD: Standard



MAIN APPLICATION:
COMPACTOR



PAC MASTER PLUS

PAC MASTER PLUS is a bias tire for compactors. It features high stability and a wider contact area. It is made of a special compound providing high heat resistance. PAC MASTER PLUS ensures an extended tire life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)		
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height			
15"	7.50 - 15	TT	14	-	STD	225	790	375	2385	6.0	6.5	bar	8.75
												km/h	2900
												10	2900
												15	2300
20"	9.00 - 20	TT	10	-	STD	270	1005	-	-	7.0	7.5	bar	5.25
												km/h	3650
												10	3650
												15	2900
	9.00 - 20	TT	12	-	STD	270	1005	-	-	7.0	7.5	bar	6.25
												km/h	4000
												10	4000
												15	3150
	9.00 - 20	TT	14	-	STD	270	1005	-	-	7.0	7.5	bar	7.25
												km/h	4375
												10	4375
												15	3445

STD: Standard



**MAIN APPLICATION:
COMPACTOR**



TR 387

TR 387 is an agro-industrial tire suitable for trailers. It features outstanding flotation capability and is available in different versions to meet specific user requirements in terms of cut and chip resistance, heavy-duty services and durability. The "dual bead" version is particularly suitable for industrial tractors and transport operations on trailers.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 30 KM/H		
									Rec./Flange Height	Alt./Flange Height	↓		
											bar	max load (kg)	
26"	18.4 - 26	TL	10	-	STD	475	1430	635	4150	DW 16 L	DW 15 L	1.80	2650
	18.4 - 26	TL	12	-	STD	475	1430	635	4150	DW 16 L	DW 15 L	2.30	3000
	18.4 - 26	TL	16	-	HD	475	1430	635	4150	DW 16 L	DW 15 L	2.90	3550
	23.1 - 26	TL	8	-	STD	587	1560	690	4545	DW 20 B	-	1.10	2900
	23.1 - 26	TL	12	-	STD	587	1560	690	4545	DW 20 B	-	1.70	3650
	23.1 - 26	TL	12	-	HD	587	1560	690	4545	DW 20 B	-	1.70	5000
	23.1 - 26	TL	16	-	STD	587	1560	690	4545	DW 20 B	-	2.30	4375
	23.1 - 26	TL	16	-	DB	587	1560	690	4545	DW 20 B	-	2.30	4375
	23.1 - 26	TT	18	-	DB HD	587	1560	690	4545	DW 20 B	-	2.60	4625
	23.1 - 26	TL	18	-	DB HD	587	1560	690	4545	DW 20 B	-	2.60	4625
	23.1 - 26	TL	18	-	HD DB SPL	587	1560	690	4545	DW 20 B	-	2.60	4625
	28"	12.4 - 28	TL	8	-	STD	325	1200	550	3576	W 11	W 9; W 10	2.30
16.9 - 28		TL	8	-	STD	440	1400	630	4074	DW 15 L	DW 14 L	1.70	2180

STD: Standard
 HD: Heavy Duty
 DB: Dual Bead
 DB HD: Dual Bead Heavy Duty
 HD DB SPL: Heavy Duty Dual Bead Special



**MAIN APPLICATION:
COMPACTOR**



TR 387

TR 387 is an agro-industrial tire suitable for trailers. It features outstanding flotation capability and is available in different versions to meet specific user requirements in terms of cut and chip resistance, heavy-duty services and durability. The "dual bead" version is particularly suitable for industrial tractors and transport operations on trailers.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 30 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
30" 16.9 - 30	TL	8	-	STD	440	1450	655	4220	DW 15 L	DW 14 L	1.70	2300
18.4 - 30	TL	8	-	STD	475	1530	680	4395	DW 16 L	DW 15 L	1.40	2430
18.4 - 30	TT	14	-	HD	475	1530	680	4395	DW 16 L	DW 15 L	2.60	3450
32" 24.5 - 32	TL	16	-	STD	625	1755	790	5226	DH 21	DH 21 B; DH 21 H; DH 21 HB	2.10	5000

STD: Standard
HD: Heavy Duty



**MAIN APPLICATION:
COMPACTOR**



TR 390

TR 390 is an agro-industrial tire suitable for trailers. TR 390 features outstanding flotation capability and increased durability. Its "dual bead HD" version is particularly suitable for industrial tractors and transport operations on trailers, whereas its "dual bead HD special" version is ideal for heavy-duty service.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 30 KM/H	
									Rec./Flange Height	Alt./Flange Height	↓	
											bar	max load (kg)
23.1 - 26	TL	8	-	STD	587	1560	690	4545	DW 20 B	-	1.10	2900
23.1 - 26	TL	12	-	STD	587	1560	690	4545	DW 20 B	-	1.70	3650
23.1 - 26	TL	16	-	STD	587	1560	690	4545	DW 20 B	-	2.30	4375
23.1 - 26	TL	18	-	DB HD	587	1560	690	4545	DW 20 B	-	2.60	4625
23.1 - 26	TL	18	-	HD DB SPL	587	1560	690	4545	DW 20 B	-	2.60	4625
28L - 26	TL	12	-	STD	714	1560	690	4545	DW 25 B	DW 23 B	1.40	3750
28L - 26	TL	16	-	STD	714	1560	690	4545	DW 25 B	DW 23 B	1.90	4500
28L - 26	TL	20	-	DB HD	714	1560	690	4545	DW 25 B	DW 23 B	2.80	6300

STD: Standard
DB HD: Dual Bead Heavy Duty
HD DB SPL: Heavy Duty Dual Bead Special



**MAIN APPLICATION:
COMPACTOR**



TR 391

TR 391 is an agro-industrial tire suitable for transport and compacting operations with trailers and compactors. TR 391 features outstanding flotation capability to avoid soil damages.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 30 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
24" 14.9 - 24	TL	6	-	STD	405	1255	563	3639	DW 13	DW 11; DW 13 L; DW 12	1.40	1550
14.9 - 24	TL	8	-	STD	405	1255	563	3639	DW 13	DW 11; DW 12; DW 13 L	1.80	1800

STD: Standard



**MAIN APPLICATION:
EXCAVATOR**



EM 934 (E-2)

EM 934 has been specially designed for excavators in road construction applications. It shows excellent lateral traction as well as outstanding self-cleaning features. The unique tread compound offers cut and chip resistance whereas the strong casing provides a long service life.



TRACTION



SELF-CLEANING



CUT & CHIP
RESISTANCE



DURABILITY

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 50 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
10.00 - 20	TT	16	146 B	STD	280	1060	500	3208	7.5	7.0; 8.0	7.50	3000
10.00 - 20	TT	16	146 B	SPL	280	1060	500	3208	7.5	7.0; 8.0	7.50	3000

20"

STD: Standard
SPL: Special



MAIN APPLICATION:
EXCAVATOR



EM 936 (E-2)

EM 936 has been specially designed for excavators and telehandlers in digging and loading operations. Besides, one size is particularly suitable for graders and loaders in grading, loading and transport applications. EM 936 features outstanding riding comfort and enhanced self-cleaning properties. It also ensures a high level of handling comfort and provides excellent traction even under heavy-duty service conditions. Its "special" version is made of a special compound.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)			
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height				
20"	8.25 - 20	TT	14	133 B	STD	235	980	467	2970	6.5	6.0; 7.0	bar		
												km/h	6.75	
												50	2060	
	9.00 - 20	TT	14	140 B	STD	256	1012	481	3070	7.0	6.5; 7.5	bar		
												km/h	7.00	
												50	2500	
	9.00 - 20	TT	14	140 B	SPL	256	1012	481	3070	7.0	6.5; 7.5	bar		
												km/h	7.00	
												50	2500	
	10.00 - 20	TT	16	146 B	STD	275	1050	498	3180	7.5	7.0; 8.0	bar		
												km/h	7.50	
												50	3000	
10.00 - 20	TT	16	146 B	SPL	275	1050	498	3180	7.5	7.0; 8.0	bar			
											km/h	7.50		
											50	3000		
11.00 - 20	TT	16	149 B	STD	295	1090	508	3302	8.0	7.5; 8.5	bar			
											km/h	7.20		
											50	3250		
16.0/70 - 20	TL	14	149 B/166 A2	STD	405	1090	480	3295	13 SDC	13	bar			
											km/h	3.50	4.50	
											50	3250	-	
16.0/70 - 20	TT/TL	14	149 B/166 A2	SPL	405	1090	480	3295	13 SDC	13	bar			
											km/h	3.50	4.50	
											50	3250	-	
16.0/70 - 24	TL	10	143 B/162 A2	STD	410	1190	575	3600	13 SDC	13 (DC)	bar			
											km/h	2.50	3.20	
											50	2725	-	
16.0/70 - 24 (405/70 - 24)	TL	14	152 B/169 A2	STD	410	1190	575	3600	13 SDC	13 (DC)	bar			
											km/h	3.50	4.50	
											50	3550	-	
20 - 24 (22/70 - 24)	TL	12	158 B/173 A2	STD	535	1390	665	4205	16.00 T SDC	-	bar			
											km/h	2.50	3.00	
											50	4250	-	
											10	-	6500	

STD: Standard
SPL: Special



**MAIN APPLICATION:
EXCAVATOR**



EM 938

EM 938 has been specially designed for excavators in road construction works. The tire is made of a special tread compound, which is particularly resistant to cuts and snags, whilst the aggressive tread pattern provides excellent traction. EM 938 features outstanding self-cleaning properties. The strong casing provides extraordinary resistance to impacts and shocks even in heavy-duty operations.



HEAVY DUTY SERVICE



TRACTION



HANDLING



SELF-CLEANING

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 50 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
9.00 - 20	TT	14	140 B	STD	256	1012	481	3070	7.0	6.5; 7.5	7.00	2500

STD: Standard

20"



MAIN APPLICATION:
EXCAVATOR



FLOTATION TR 678

FLOTATION TR 678 has been specially designed for trailers and agricultural implements both on- and off the road. This tire allows for carrying very heavy loads at low pressure ensuring reduced soil compaction at the same time. It provides excellent traction and outstanding self-cleaning properties. FLOTATION TR 678 size 600/40 - 22.5 as dual HD version, and size 650/45 - 22.5 all versions are also suitable for excavators.



SIZE	TYPE	PR	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
											Rec./Flange Height	Alt./Flange Height		
15.5" 280/60 - 15.5	TL	-	115 A8	-	-	STD	275	750	357	2250	8.0	-	bar	
													km/h	
280/60 - 15.5	TL	-	128 A8	-	-	STD	275	750	357	2250	8.0	-	bar	
													km/h	
22.5" 600/40 - 22.5	TL	20	-	169 A8	157 A8	DB	615	1085	483	3264	AG 20.00	-	bar	
													km/h	
													40 FR	
	TL	20	-	169 A8	-	-	DB HD	615	1085	483	3264	AG 20.00	-	bar
														km/h
														40
TL	-	-	160 D	-	-	STD	650	1150	502	3302	20.0	-	bar	
													km/h	
TL	20	-	166 B	-	-	STD	650	1150	502	3302	20.0	-	bar	
													km/h	
TL	20	-	166 B	-	-	SB	650	1150	502	3302	20.0	-	bar	
													km/h	

STD: Standard
DB: Dual Bead
DB HD: Dual Bead Heavy Duty
SB: Steel Belted



**MAIN APPLICATION:
EXCAVATOR**



MP 570

MP 570 is a road-oriented and agro-industrial tire, which is suitable for excavators and compact loaders. This tire provides good traction as well as excellent self-cleaning properties in all operating conditions.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
					Rec./Flange Height	Alt./Flange Height	↓					
18" 12.5 - 18	TL	10	-	STD	308	990	450	2950	11	12 SDC	bar	3.00
											km/h	1930
											80	2000
12.5 - 18	TL	12	-	STD	308	990	450	2950	11	12 SDC	bar	3.50
											km/h	2030
											80	2180
20" 12.5 - 20	TL	10	-	STD	335	1050	480	3130	11	12 SDC	bar	3.00
											km/h	1850
											80	2065
12.5 - 20	TL	12	-	STD	325	1040	475	3090	11	12 SDC	bar	3.50
											km/h	2060
											80	2300
14.5 - 20	TL	12	-	STD	360	1116	505	3325	11	12 SDC	bar	3.00
											km/h	2430
											65	2500

STD: Standard



**MAIN APPLICATION:
GRADER**



EM 936

EM 936 has been specially designed for excavators and telehandlers in digging and loading operations. Besides, one size is particularly suitable for graders and loaders in grading, loading and transport applications. EM 936 features outstanding riding comfort and enhanced self-cleaning properties. It also ensures a high level of handling comfort and provides excellent traction even under heavy-duty service conditions. Its "special" version is made of a special compound.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)			
									Rec./Flange Height	Alt./Flange Height	↓			
20" 11.00 - 20	TT	16	149 B	STD	295	1090	508	3302	8.0	7.5; 8.5	bar	7.20		
											km/h	50	3250	
16.0/70 - 20	TL	14	149 B/166 A2	STD	405	1090	480	3295	13 SDC	13	bar	3.50	4.50	
											km/h	50	3250	-
												10	-	5300
16.0/70 - 20	TT/TL	14	149 B/166 A2	SPL	405	1090	480	3295	13 SDC	13	bar	3.50	4.50	
											km/h	50	3250	-
												10	-	5300
24" 16.0/70 - 24	TL	10	143 B/162 A2	STD	410	1190	575	3600	13 SDC	13 (DC)	bar	2.50	3.20	
											km/h	50	2725	-
												10	-	4750
16.0/70 - 24 (405/70 - 24)	TL	14	152 B/169 A2	STD	410	1190	575	3600	13 SDC	13 (DC)	bar	3.50	4.50	
											km/h	50	3550	-
												10	-	5800
20 - 24 (22/70 - 24)	TL	12	158 B/173 A2	STD	535	1390	665	4205	16.00 T SDC	-	bar	2.50	3.00	
											km/h	50	4250	-
												10	-	6500

STD: Standard
SPL: Special



MAIN APPLICATION:
GRADER



GR 288 (G-2/L-2)

GR 288 (G-2/L-2) is a versatile bias-ply tire for graders or loaders. It is ideal for use in construction, site preparation, road building, and other soft or muddy environments. The self-cleaning tread pattern provides excellent traction, and you can expect a long tire life as a result of the special cut-and-chip-resistant compound.



SELF-CLEANING

TRACTION

CUT & CHIP RESISTANCE

SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)			
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	↓			
25" 15.5 - 25	TL	12	-	STD	385	1270	572	3772	12.00/1.3	12.00/1.3 (DC)	bar	2.50	4.00	
											km/h	40	2650	-
											10	-	5600	-
											bar	2.00	3.50	-
17.5 - 25	TL	12	-	STD	445	1330	596	3950	14.00/1.5	14.00/1.5 (DC); 14.00/1.3 (DC)	bar	2.00	3.50	
											km/h	40	2900	-
											10	-	6150	-
											bar	2.75	4.75	-
17.5 - 25	TL	16	-	STD	445	1330	596	3950	14.00/1.5	14.00/1.3 (DC)	bar	2.75	4.75	
											km/h	40	3350	-
											10	-	7300	-
											bar	3.25	5.75	-
17.5 - 25	TL	20	-	STD	445	1330	596	3950	14.00/1.5	14.00/1.3 (DC)	bar	3.25	5.75	
											km/h	40	3650	-
											10	-	8250	-
											bar	3.25	5.75	-
17.5 - 25	TT	20	-	DB HD	445	1330	596	3950	14.00/1.5	14.00/1.3 (DC)	bar	3.25	5.75	
											km/h	40	3650	-
											10	-	8250	-
											bar	2.25	3.50	-
20.5 - 25	TL	16	-	STD	520	1480	656	4396	17.00/2.0	17.00/1.7	bar	2.25	3.50	
											km/h	40	4000	-
											10	-	8250	-
											bar	2.75	4.50	-
20.5 - 25	TL	20	-	STD	520	1480	656	4396	17.00/2.0	17.00/1.7	bar	2.75	4.50	
											km/h	40	4500	-
											10	-	9500	-
											bar	2.00	3.00	-
23.5 - 25	TL	16	-	STD	595	1610	708	4782	19.50/2.5	-	bar	2.00	3.00	
											km/h	40	4750	-
											10	-	9500	-
											bar	2.50	3.75	-
23.5 - 25	TL	20	-	STD	595	1610	708	4782	19.50/2.5	-	bar	2.50	3.75	
											km/h	40	5450	-
											10	-	10900	-
											bar	2.50	3.75	-

STD: Standard
DB HD: Dual Bead Heavy Duty



MAIN APPLICATION:
GRADER



SUPER GRADER (G-2)

SUPER GRADER (G-2) is a bias tire particularly designed for graders. It shows excellent traction and self-cleaning features. SUPER GRADER is made of a special compound which enables an extended tire life-cycle and heavy-duty service.



DURABILITY



TRACTION



SELF-CLEANING



HEAVY DUTY SERVICE



SPECIAL COMPOUND

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 40 KM/H	
									Rec./Flange Height	Alt./Flange Height	↓	
											bar	max load (kg)
13.00 - 24	TL	12	-	STD	340	1280	613	3925	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC	3.00	2725
13.00 - 24	TL	16	-	STD	340	1280	613	3925	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC	4.00	3240
14.00 - 24	TL	12	-	STD	364	1335	598	3952	8.00 TG SDC	9.00/1.5 (DC); 10.00 VA SDC; 10.00 WA SDC	2.50	3075
14.00 - 24	TL	16	-	STD	364	1335	598	3952	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC	3.50	3650
16.00 - 24	TL	16	-	STD	430	1450	644	4307	10.00 VA SDC	-	3.00	4500

STD: Standard



MAIN APPLICATION:
GRADER



TRAC GRADER + (G-2)

TRAC GRADER + (G-2) is a bias-ply tire for graders. It is an excellent choice for the budget-minded customers. The durable casing is designed to last. The self-cleaning tread design shows open lug-to-void-ratio which provides best traction in all conditions. Its "special" version is made of a special cut-and-chip-resistant compound.



DURABILITY



TRACTION



SELF-CLEANING

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 40 KM/H	
									Rec./Flange Height	Alt./Flange Height		
											bar	max load (kg)
24" 13.00 - 24	TL	12	-	STD	340	1280	600	3943	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC	3.00	2725
13.00 - 24	TL	12	-	SPL	340	1280	600	3943	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC	3.00	2725
13.00 - 24	TL	14	-	STD	340	1280	600	3943	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC	3.50	3000
13.00 - 24	TL	16	-	STD	340	1280	600	3943	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC	4.00	3240
14.00 - 24	TL	12	-	STD	364	1348	598	3990	8.00 TG SDC	9.00/1.5 (DC); 10.00 VA SDC; 10.00 WA SDC	2.50	3075
14.00 - 24	TL	12	-	SPL	364	1348	598	3990	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC; 10.00 WA SDC	2.50	3075
14.00 - 24	TL	16	-	STD	364	1348	598	3990	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC	3.50	3650
14.00 - 24	TL	16	-	SPL	364	1348	598	3990	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC	3.50	3650

STD: Standard
SPL: Special Version



**MAIN APPLICATION:
GRADER**



XL GRIP (G-3)

XL GRIP (G-3) is a bias-ply tire for graders designed to minimize cuts and punctures in heavy-duty grading environments where exceptional traction is required.



HEAVY DUTY SERVICE



TRACTION



DURABILITY



CUT & CHIP
RESISTANCE

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 40 KM/H	
									Rec./Flange Height	Alt./Flange Height		
											bar	max load (kg)
24" 13.00 - 24	TL	16	-	STD	350	1295	596	3833	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC	4.00	3240
14.00 - 24	TL	16	-	STD	365	1355	622	4040	8.00 TG SDC	9.00/1.5 (DC); 10.00/VA SDC	3.50	3650
16.00 - 24	TL	16	-	STD	432	1450	654	4289	10.00 VA SDC	-	3.00	4500

STD: Standard



MAIN APPLICATION:
SKID STEER



GIANT TRAX

GIANT TRAX has been designed for skid steer loaders in scrap yard operations, on rough concrete surfaces, recycling applications and mines. The extra deep tread with wider and sturdier blocks provides best traction, stability, and puncture resistance. The special tread compound results in exceptional cut and chip resistance along with excellent wear resistance on all types of terrains.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
									Rec./Flange Height	Alt./Flange Height		
16.5" 10 - 16.5	TL	12	-	STD	270	775	362	2317	8.25	-	bar	6.20
											km/h	2375
											10	1875
											15	1730
											25	
12 - 16.5	TL	14	-	STD	315	840	398	2521	9.75	-	bar	6.20
											km/h	3075
											10	2430
											15	2245
											25	

STD: Standard



MAIN APPLICATION:
SKID STEER



JUMBO TRAX HD

JUMBO TRAX HD is a block pattern tire for skid steers. It features cut and chip resistance and is particularly suitable for heavy-duty service. The deep tread along with excellent sidewall protection provides an extended tire life-cycle. JUMBO TRAX HD is also available in a "special" version.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)	
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	↓	
16.5" 10 - 16.5	TL	10	-	STD	268	795	363	2345	8.25	-	bar	5.20
											km/h	2135
											10	2135
											15	1685
											25	1560
10 - 16.5	TL	10	-	SPL	268	795	363	2345	8.25	-	bar	5.20
											km/h	2135
											10	2135
											15	1685
											25	1560
12 - 16.5	TL	10	-	STD	325	855	387	2522	9.75	-	bar	4.50
											km/h	2540
											10	2540
											15	2005
											25	1855
12 - 16.5	TL	12	-	STD	325	855	387	2522	9.75	-	bar	5.50
											km/h	2865
											10	2865
											15	2265
											25	2090

STD: Standard
SPL: Special



MAIN APPLICATION:
SKID STEER



POWER TRAX HD

POWER TRAX HD is a bias-ply tire that is specially designed for skid steer equipment. The tire features excellent cut, chip and tear resistance suitable for rough and hard concrete surface. The deep tread provides an extended tire life-cycle and excellent sidewall protection. It is the ideal tire for scrap yards, recycling operations, mining etc.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)	
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height		
16.5" 10 - 16.5	TL	10	-	STD	268	790	361	2331	8.25	-	bar	
											km/h	5.20
											10	2135
											15	1685
											25	1560
12 - 16.5	TL	10	-	STD	324	865	391	2552	9.75	-	bar	
											km/h	4.50
											10	2540
											15	2005
											25	1855
12 - 16.5	TL	12	-	STD	324	865	391	2552	9.75	-	bar	
											km/h	5.50
											10	2865
											15	2265
											25	2090
12 - 16.5	TL	14	-	STD	324	865	391	2552	9.75	-	bar	
											km/h	6.20
											10	3075
											15	2430
											25	2245

STD: Standard



MAIN APPLICATION:
SKID STEER



SKID POWER

SKID POWER has been designed for skid steers in construction applications. It shows excellent traction as well as enhanced self-cleaning features. The tire features an extra deep tread along with extra sidewall protection providing excellent cut and chip resistance and outstanding durability. SKID POWER is the ideal tire for loose surfaces.



TRACTION



SUITABLE FOR
LOOSE SURFACE



CUT & CHIP
RESISTANCE



SELF-CLEANING

SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)		
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	↓		
14" 25 X 8.5 - 14	TL	6	-	STD	213	652	-	-	7 JA	-	bar	3.40	
											km/h	10	965
											15	765	
											25	705	
16.5" 10 - 16.5	TL	8	-	STD	254	775	355	2286	8.25	-	bar	4.10	
											km/h	10	1880
											15	1485	
											25	1370	
10 - 16.5	TL	10	-	STD	254	775	355	2286	8.25	-	bar	5.20	
											km/h	10	2135
											15	1685	
											25	1560	
12 - 16.5	TL	10	-	STD	305	821	373	2422	9.75	-	bar	4.50	
											km/h	10	2540
											15	2005	
											25	1855	
17.5" 14 - 17.5	TL	14	-	STD	355	940	424	2773	10.5	-	bar	5.50	
											km/h	10	3875
											15	3060	
											25	2830	

STD: Standard



MAIN APPLICATION:
SKID STEER



SKID POWER (CHEVRON)

SKID POWER (CHEVRON) has been specially designed for skid steers in construction applications. It features excellent traction as well as enhanced self-cleaning properties. SKID POWER (CHEVRON) is particularly suitable for loose surfaces and shows high cut and chip resistance.



TRACTION



SUITABLE FOR
LOOSE SURFACE



CUT & CHIP
RESISTANCE



SELF-CLEANING

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)
					Rec./Flange Height	Alt./Flange Height					
15" 7.00 - 15	TL	6	-	STD							 bar 4.10 km/h 10 1440 15 1140
					203	762	347	2295	5.50 F	6 LB	

STD: Standard



MAIN APPLICATION:
SKID STEER



SKID POWER HD

SKID POWER HD has been designed for skid steers in construction applications. The tire features an extra deep tread and sidewall protection providing excellent cut and chip resistance and outstanding durability. SKID POWER HD is the ideal tire for loose surfaces and heavy-duty service.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)			
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	↓			
8"	18 X 8.5 - 8	TL	8	-	STD	210	460	207	1357	7.00 I - 55; I - 70; I - 90	-	bar	3.00	
												km/h	10	740
												15	585	
												25	540	
10"	18 X 8.5 - 10	TL	8	-	STD	205	465	213	1372	7.00 I - 55; I - 70; I - 90	-	bar	3.00	
												km/h	10	720
												15	570	
												25	525	
12"	23 X 8.50 - 12	TL	6	-	STD	215	585	267	1726	7.00 I - 55	7.00 I - 70; 7 JA	bar	3.40	
												km/h	10	820
												15	650	
	23 X 8.50 - 12	TL	8	-	STD	215	585	267	1726	7.00 I - 55	7.00 I - 70; 7 JA	bar	4.40	
												km/h	10	940
												15	745	
	23 X 8.50 - 12	TL	12	-	STD	215	585	267	1726	7.00 I - 55	7.00 I - 70; 7 JA	bar	6.20	
												km/h	10	1150
												15	910	
	26 X 12 - 12	TL	8	-	STD	305	660	297	1947	10.50 I - 55	8.50 I - 55; 10.50 I - 70; 8½ JA; 9½ JA; 10½ JA	bar	3.40	
												km/h	10	1370
												15	1080	
	26 X 12 - 12	TL	10	-	STD	305	660	297	1947	10.50 I - 55	8.50 I - 55; 10.50 I - 70; 8½ JA; 9½ JA; 10½ JA	bar	4.40	
												km/h	10	1595
												15	1260	
26 X 12 - 12	TL	12	-	STD	305	660	297	1947	10.50 I - 55	8.50 I - 55; 10.50 I - 70; 8½ JA; 9½ JA; 10½ JA	bar	5.40		
											km/h	10	1800	
											15	1420		
27 X 10 - 12 (250/75 - 12)	TT	14	-	IND	255	700	-	-	8.00 G	-	bar	6.90		
											km/h	25	2725	

STD: Standard
IND: Industrial



MAIN APPLICATION:
SKID STEER



SKID POWER HD

SKID POWER HD has been designed for skid steers in construction applications. The tire features an extra deep tread and sidewall protection providing excellent cut and chip resistance and outstanding durability. SKID POWER HD is the ideal tire for loose surfaces and heavy-duty service.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)			
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height				
15"	27 X 10.5 - 15	TL	8	-	STD	266	684	316	2020	8 LB	-	bar	4.20	
												km/h	10	1405
												15	1110	
												25	1025	
	27 X 8.50 - 15	TL	8	-	STD	218	676	313	1995	7 JA	-	bar	4.20	
												km/h	10	1310
												15	1035	
												25	955	
	31 X 15.5 - 15	TL	8	-	STD	400	790	360	2330	13 LB	-	bar	3.10	
												km/h	15	1655
												50	1255	
	31 X 15.5 - 15	TL	10	-	STD	400	790	360	2330	13 LB	-	bar	4.20	
												km/h	15	1960
												50	1485	
	16.5"	10 - 16.5	TL	8	-	STD	267	775	355	2286	8.25	-	bar	4.10
													km/h	10
15													1485	
25													1370	
10 - 16.5		TL	10	-	STD	267	775	355	2286	8.25	-	bar	5.20	
												km/h	10	2135
												15	1685	
												25	1560	
12 - 16.5		TL	10	-	STD	324	850	385	2508	9.75	-	bar	4.50	
												km/h	10	2540
												15	2005	
												25	1855	
12 - 16.5		TL	12	-	STD	324	850	385	2508	9.75	-	bar	5.50	
												km/h	10	2865
												15	2265	
												25	2090	
31.5 X 13 - 16.5		TL	10	-	STD	330	795	363	2345	9.75	-	bar	4.80	
												km/h	10	2435
												15	1925	
33 X 15.5 - 16.5		TL	12	-	STD	394	838	380	2472	13.00	-	bar	4.80	
												km/h	10	3145
												15	2485	
												25	2295	

STD: Standard



MAIN APPLICATION:
SKID STEER



SKID POWER HD

SKID POWER HD has been designed for skid steers in construction applications. The tire features an extra deep tread and sidewall protection providing excellent cut and chip resistance and outstanding durability. SKID POWER HD is the ideal tire for loose surfaces and heavy-duty service.



DURABILITY



EXTRA DEEP TREAD



HEAVY DUTY SERVICE



SIDEWALL PROTECTION



CUT & CHIP RESISTANCE



RIM PROTECTION



SUITABLE FOR LOOSE SURFACE

SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)	
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height		
17.5"	TL	14	-	STD								
					350	930	420	2744	10.50	-	bar	5.50
					km/h							
					10							3875
					15							3060
25							2830					
19.5"	TL	14	-	STD								
					400	1035	468	3053	11.75	12.25	bar	4.85
					km/h							
					10							4565
					15							3605
25							3330					

STD: Standard



MAIN APPLICATION:
SKID STEER



SKID POWER SK

SKID POWER SK has been specially designed for skid steers in construction applications. Its sidewall and rim guard protectors as well as its deep tread provide an extended tire life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)	
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height		
16.5" 10 - 16.5	TL	8	-	STD	270	775	355	2286	8.25	-	bar	
											km/h	4.10
											10	1880
											15	1485
											25	1370
10 - 16.5	TL	10	-	STD	270	775	355	2286	8.25	-	bar	
											km/h	5.20
											10	2135
											15	1685
											25	1560
12 - 16.5	TL	10	-	STD	312	825	375	2434	9.75	-	bar	
											km/h	4.50
											10	2540
											15	2005
											25	1855
12 - 16.5	TL	12	-	STD	312	825	375	2434	9.75	-	bar	
											km/h	5.50
											10	2865
											15	2265
											25	2090

STD: Standard



SKID POWER PLUS

SKID POWER PLUS has been designed for skid steers in construction applications. Its wider lugs provide excellent traction as well as enhanced self-cleaning properties. The tire features an extra deep tread along with enhanced sidewall protection providing excellent cut-and-chip resistance and outstanding durability. SKID POWER PLUS is the ideal tire for loose surfaces. The wide contact area provides excellent stability during operations.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)	
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height		
16.5" 10 - 16.5	TL	8	-	STD	252	775	-	-	8.25	-	bar	
											km/h	4.10
											10	1880
											15	1485
											25	1370
10 - 16.5	TL	10	-	STD	252	775	-	-	8.25	-	bar	
											km/h	5.20
											10	2135
											15	1685
											25	1560

STD: Standard



MAIN APPLICATION:
SKID STEER



SNOW TRAC (A)

SNOW TRAC is particularly suitable for road applications in winter conditions with skid steers. It features excellent traction and is ideal for ice and snow operations. Its specially designed tread pattern eliminates slippage risks.



ICE & SNOW

HEAVY DUTY SERVICE

DURABILITY

STABILITY

CUT & CHIP RESISTANCE

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 10 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
16" 12.5/70 - 16	TL	6	-	STD	315	850	385	2550	10 LB	-	2.00	1410
12.5/70 - 16	TL	10	-	STD	315	850	385	2550	10 LB	-	3.20	1855
16.5" 10 - 16.5	TL	6	-	STD	270	780	357	2340	8.25	-	3.10	1590
10 - 16.5	TL	10	-	STD	270	780	357	2340	8.25	-	5.20	2135
12 - 16.5	TL	6	-	STD	305	835	379	2505	9.75	-	2.80	1915
12 - 16.5	TL	10	-	STD	305	835	379	2505	9.75	-	4.50	2540
18" 15.5/60 - 18	TL	10	-	STD	395	938	425	2814	W 13	-	2.60	2400
20" 17.5/65 - 20	TL	10	-	STD	445	1095	493	3285	W 14 L	-	2.40	3195

STD: Standard



MAIN APPLICATION:
SKID STEER



SURE TRAX HD

SURE TRAX HD is a block pattern tire for skid steers in construction applications. It shows excellent cut and chip resistance as well as top rim protection. SURE TRAX HD is ideal for paved surfaces and heavy-duty service.



CUT & CHIP RESISTANCE



PAVED SURFACE



DURABILITY



HEAVY DUTY SERVICE



RIM PROTECTION

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
					Rec./Flange Height	Alt./Flange Height						
16.5" 10 - 16.5	TL	10	-	STD	268	785	359	2316	8.25	-	↓	
											bar	5.20
											km/h	2135
											15	1685
											25	1560
12 - 16.5	TL	12	-	STD	325	855	387	2522	9.75	-	↓	
											bar	5.50
											km/h	2865
											15	2265
											25	2090

STD: Standard



**MAIN APPLICATION:
TELEHANDLER**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	Type	PR	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Rec./Flange Height	RIM Alt./Flange Height	LOAD CAPACITY (KG/TIRE)	
												bar	km/h
15.3" 10.0/75 - 15.3	TT	8	119 A8	106 A8	STD	264	780	345	2285	9.00	-	bar	3.10
												km/h	1525
												30 FR	1360
												40 FR	1065
												30 DW	950
												40 DW	950
10.0/75 - 15.3	TL	8	119 A8	106 A8	STD	264	780	345	2285	9.00	-	bar	3.10
												km/h	1525
												30 FR	1360
												40 FR	1065
												30 DW	950
												40 DW	950
10.0/75 - 15.3	TL	8	119 A8	106 A8	IND	264	780	345	2285	9.00	-	bar	3.10
												km/h	1525
												30 FR	1360
												40 FR	1065
												30 DW	950
												40 DW	950
10.0/75 - 15.3	TL	10	123 A8	111 A8	STD	264	780	345	2285	9.00	-	bar	3.90
												km/h	1735
												30 FR	1550
												40 FR	1220
												30 DW	1090
												40 DW	1090
10.0/75 - 15.3	TL	14	130 A8	118 A8	STD	264	780	345	2285	9.00	-	bar	5.50
												km/h	2130
												30 FR	1900
												40 FR	1480
												30 DW	1320
												40 DW	1320
10.0/75 - 15.3	TT	18	135 A8	122 A8	STD	264	780	345	2285	9.00	-	bar	7.10
												km/h	2440
												30 FR	2180
												40 FR	1680
												30 DW	1500
												40 DW	1500

STD: Standard
IND: Industrial



**MAIN APPLICATION:
TELEHANDLER**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	Type	PR	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)
										Rec./Flange Height	Alt./Flange Height	
15.3" 10.0/75 - 15.3	TL	18	135 A8	122 A8	STD	264	780	345	2285	9.00	-	bar
												7.10
												km/h
												30 FR
												2440
												40 FR
2180												
30 DW												
1680												
40 DW												
1500												
11.5/80 - 15.3	TT	8	126 A8	114 A8	STD	290	867	380	2540	9.00	-	bar
												2.70
												km/h
												30 FR
												1905
												40 FR
1700												
30 DW												
1320												
40 DW												
1180												
11.5/80 - 15.3	TL	8	126 A8	114 A8	STD	290	867	380	2540	9.00	-	bar
												2.70
												km/h
												30 FR
												1905
												40 FR
1700												
30 DW												
1320												
40 DW												
1180												
11.5/80 - 15.3	TL	10	131 A8	119 A8	STD	290	867	380	2540	9.00	-	bar
												3.40
												km/h
												30 FR
												2185
												40 FR
1950												
30 DW												
1525												
40 DW												
1360												
11.5/80 - 15.3	TT	12	135 A8	123 A8	STD	290	867	380	2540	9.00	-	bar
												4.10
												km/h
												30 FR
												2440
												40 FR
2180												
30 DW												
1735												
40 DW												
1550												

STD: Standard



**MAIN APPLICATION:
TELEHANDLER**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	Type	PR	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Rec./Flange Height	RIM Alt./Flange Height	LOAD CAPACITY (KG/TIRE)	
												↓	↓
15.3" 11.5/80 - 15.3	TL	12	135 A8	123 A8	STD	290	867	380	2540	9.00	-	bar	4.10
												km/h	2440
												30 FR	2180
												40 FR	1735
												30 DW	1550
												40 DW	1550
11.5/80 - 15.3	TT	14	139 A8	126 A8	STD	290	867	380	2540	9.00	-	bar	4.80
												km/h	2720
												30 FR	2430
												40 FR	1905
												30 DW	1700
												40 DW	1700
11.5/80 - 15.3	TL	14	139 A8	126 A8	STD	290	867	380	2540	9.00	-	bar	4.80
												km/h	2720
												30 FR	2430
												40 FR	1905
												30 DW	1700
												40 DW	1700
27 X 10 - 15.3	TT	8	107 A8	95 A8	STD	260	695	317	2071	9.00	-	bar	3.10
												km/h	1090
												30 FR	975
												40 FR	775
												30 DW	690
												40 DW	690
27 X 10 - 15.3	TL	8	107 A8	95 A8	STD	260	695	317	2071	9.00	-	bar	3.10
												km/h	1090
												30 FR	975
												40 FR	775
												30 DW	690
												40 DW	690
16" 6.00 - 16	TT	6	95 A8	83 A8	STD	164	735	343	2190	4.00 E	4.50 E; 4½ K	bar	2.80
												km/h	775
												30 FR	690
												40 FR	545
												30 DW	485
												40 DW	485

STD: Standard



**MAIN APPLICATION:
TELEHANDLER**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	Type	PR	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)
										Rec./Flange Height	Alt./Flange Height	
16" 7.50 - 16	TT	6	104 A8	92 A8	STD	209	803	372	2393	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	bar
												km/h
												30 FR
												40 FR
												30 DW
												40 DW
7.50 - 16	TT	8	112 A8	99 A8	STD	209	803	372	2393	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	bar
												km/h
												30 FR
												40 FR
												30 DW
												40 DW
7.50 - 16	TL	8	112 A8	99 A8	STD	209	803	372	2393	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	bar
												km/h
												30 FR
												40 FR
												30 DW
												40 DW
7.50 - 16	TT	8	112 A8	99 A8	HD	209	803	372	2393	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	bar
												km/h
												30 FR
												40 FR
												30 DW
												40 DW
9.0/70 - 16	TL	10	119 A8	106 A8	STD	222	760	355	2285	W 7	-	bar
												km/h
												30 FR
												40 FR
												30 DW
												40 DW
270/75 - 16 (10.0/75 - 16)	TL		123 A8	111 A8	STD	250	810	-	-	9.00	-	bar
												km/h
												10 FR
												25 FR
												30 FR
												40 FR
												10 DW
												25 DW
												30 DW
												40 DW

STD: Standard
HD: Heavy Duty



**MAIN APPLICATION:
TELEHANDLER**




AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	Type	PR	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
										Rec./Flange Height	Alt./Flange Height		
17" 15.0/55 - 17	TL	10	134 A8	122 A8	STD	380	890	395	2608	13.00	13	bar	
												km/h	2.60
												30 FR	2375
												40 FR	2120
												30 DW	1680
												40 DW	1500
15.0/55 - 17	TL	14	141 A8	129 A8	STD	380	890	395	2608	13.00	13	bar	
												km/h	3.60
												30 FR	2885
												40 FR	2575
												30 DW	2070
												40 DW	1850
19.0/45 - 17	TL	14	144 A8	131 A8	STD	465	865	389	2578	16.00	-	bar	
												km/h	2.80
												30 FR	3135
												40 FR	2800
												30 DW	2185
												40 DW	1950
420/55 - 17	TL	14	142 A8	129 A8	STD	430	910	407	2712	13.00	-	bar	
												km/h	3.00
												30 FR	2970
												40 FR	2650
												30 DW	2070
												40 DW	1850
420/55 - 17	TL	16	145 A8	133 A8	STD	430	910	407	2712	13.00	-	bar	
												km/h	3.50
												30 FR	3250
												40 FR	2900
												30 DW	2305
												40 DW	2060

STD: Standard



**MAIN APPLICATION:
TELEHANDLER**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	Type	PR	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)
										Rec./Flange Height	Alt./Flange Height	
18" 7.50 - 18	TT	6	106 A8	94 A8	STD	209	854	407	2649	5.50 F	4.50 E; 6.00 F; 5.00 F	bar
												2.30
												km/h
												30 FR
												40 FR
												30 DW
40 DW												
7.50 - 18	TT	8	114 A8	101 A8	STD	209	854	407	2649	5.50 F	4.50 E; 6.00 F; 5.00 F	bar
												3.10
												km/h
												30 FR
												40 FR
												30 DW
40 DW												
10.5/80 - 18	TL	10	131 A8	119 A8	STD	274	907	405	2657	W 9	9; W 8	bar
												3.70
												km/h
												30 FR
												40 FR
												30 DW
40 DW												
12.5/80 - 18	TL	12	142 A8	129 A8	STD	308	987	438	2892	W 9	9; 11	bar
												3.70
												km/h
												30 FR
												40 FR
												30 DW
40 DW												
12.5/80 - 18	TL	12	142 A8	129 A8	SPL	308	987	438	2892	W 9	9; 11	bar
												3.70
												km/h
												30 FR
												40 FR
												30 DW
40 DW												
12.5/80 - 18	TL	16	148 A8	135 A8	STD	308	987	438	2892	W 9	9; 11	bar
												4.90
												km/h
												30 FR
												40 FR
												30 DW
40 DW												

STD: Standard
SPL: Special



**MAIN APPLICATION:
TELEHANDLER**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	Type	PR	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Rec./Flange Height	RIM Alt./Flange Height	LOAD CAPACITY (KG/TIRE)		
												↓	↓	
18"	12.5/80 - 18	TL	18	150 A8	138 A8	STD	308	987	438	2892	W 9	9; 11	bar	5.50
													km/h	3750
													30 FR	3350
													30 DW	2645
													40 DW	2360
20"	7.50 - 20	TT	8	116 A8	103 A8	STD	209	904	422	2695	5.50 F	4.50 E; 6.00 F; 5.00 F	bar	3.20
													km/h	1400
													30 FR	1250
													30 DW	980
													40 DW	875
20"	16.0/70 - 20	TL	10	147 A8	135 A8	STD	408	1097	487	3214	13	12 SDC; 14; 13 SDC	bar	2.50
													km/h	3445
													30 FR	3075
													30 DW	2440
													40 DW	2180
20"	16.0/70 - 20	TL	12	151 A8	139 A8	STD	408	1097	487	3214	13	12 SDC; 14; 13 SDC	bar	3.00
													km/h	3865
													30 FR	3450
													30 DW	2720
													40 DW	2430
20"	16.0/70 - 20	TL	14	154 A8	142 A8	STD	408	1097	487	3214	13	12 SDC; 14; 13 SDC	bar	3.50
													km/h	4200
													30 FR	3750
													30 DW	2970
													40 DW	2650
20"	16.0/70 - 20	TL	16	156 A8	144 A8	STD	408	1097	487	3214	13	12 SDC; 14; 13 SDC	bar	4.00
													km/h	4480
													30 FR	4000
													30 DW	3135
													40 DW	2800
20"	400/70 - 20	TL	-	-	-	IND	408	1097	487	3214	13	12 SDC; 14; 13 SDC	bar	4.00
													km/h	3380
													30	3380
													40	3250

STD: Standard
IND: Industrial



**MAIN APPLICATION:
TELEHANDLER**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	Type	PR	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)
										Rec./Flange Height	Alt./Flange Height	
24" 15.5/80 - 24	TL	10	154 A8	142 A8	STD	384	1262	566	3655	W 12	W 13; W 14 L	bar
												km/h
												30 FR
												40 FR
												30 DW
												40 DW
15.5/80 - 24	TL	12	157 A8	145 A8	STD	384	1262	566	3655	W 12	W 13; W 14 L	bar
												km/h
												30 FR
												40 FR
												30 DW
												40 DW
15.5/80 - 24	TL	14	160 A8	148 A8	STD	384	1262	566	3655	W 12	W 13; W 14 L	bar
												km/h
												30 FR
												40 FR
												30 DW
												40 DW
15.5/80 - 24	TL	14	160 A8	148 A8	SPL	384	1262	566	3655	W 12	W 13; W 14 L	bar
												km/h
												30 FR
												40 FR
												30 DW
												40 DW
15.5/80 - 24	TL	16	163 A8	151 A8	STD	384	1262	566	3655	W 12	W 13; W 14 L	bar
												km/h
												30 FR
												40 FR
												30 DW
												40 DW
16.5/85 - 24	TL	10	158 A8	146 A8	STD	415	1325	591	3837	W 13	W 14 L; W 15 L	bar
												km/h
												30 FR
												40 FR
												30 DW
												40 DW

STD: Standard
SPL: Special



**MAIN APPLICATION:
TELEHANDLER**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	Type	PR	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Rec./Flange Height	RIM Alt./Flange Height	LOAD CAPACITY (KG/TIRE)	
												↓	↓
24" 16.5/85 - 24	TL	12	163 A8	151 A8	STD	415	1325	591	3837	W 13	W 14 L; W 15 L	bar	2.80
												km/h	
												30 FR	5460
												40 FR	4875
												30 DW	3865
												40 DW	3450
16.5/85 - 24	TT	16	168 A8	155 A8	STD	415	1325	591	3837	W 13	W 14 L; W 15 L	bar	3.80
												km/h	
												30 FR	6270
												40 FR	5600
												30 DW	4340
												40 DW	3875
16.5/85 - 24	TL	16	168 A8	155 A8	STD	415	1325	591	3837	W 13	W 14 L; W 15 L	bar	3.80
												km/h	
												30 FR	6270
												40 FR	5600
												30 DW	4340
												40 DW	3875
400/80 - 24	TL	-	-	156 A8	IND	394	1262	566	3655	W 13	W 12; W 14 L	bar	3.80
												km/h	
												30	4160
												40	4000
400/80 - 24	TL	-	-	162 A8	IND	394	1262	566	3655	W 13	W 12; W 14 L	bar	5.00
												km/h	
												30	4940
												40	4750

STD: Standard
IND: Industrial



MAIN APPLICATION:
TELEHANDLER



CON STAR

CON STAR is particularly suitable for backhoe loaders, compact loaders and telehandlers in digging and loading applications. It features high load capacity along with excellent vertical and horizontal stability. CON STAR has been made of a cut-and-chip-resistant compound contributing to an extended tire life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 40 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
18" 340/80 - 18 (12.5/80 - 18)	TL	-	143 A8	IND	350	1015	460	3075	11	12; 11 SDC; 12 SDC; W 10; W 11	4.00	2725
20" 340/80 - 20 (12.5/80 - 20)	TL	-	144 A8	IND	350	1065	491	3272	11	12; 11 SDC; 12 SDC; W 10; W 11	4.00	2800
380/75 - 20 (14.5 - 20)	TL	-	148 A8	IND	385	1080	500	3273	W 12	W 11; 12 SDC; 12; W 13; 13 SDC; 13	4.00	3150
400/70 - 20 (16.0/70 - 20)	TL	-	156 A8	IND	405	1080	501	3303	13	12 SDC; 13 SDC; 14	5.00	4000
400/70 - 20 (16.0/70 - 20)	TL	16	149 A8	IND	405	1080	501	3303	13	12 SDC; 13 SDC; 14	4.00	3250
24" 400/70 - 24 (16.0/70 - 24)	TL	-	158 A8	IND	395	1175	-	-	13	DW 12; 13 SDC; DW 13; DW 13 L; DW 14 L	5.00	4250
400/80 - 24 (15.5/80 - 24)	TL	20	162 A8	STD	405	1250	570	3781	DW 13	DW 12; DW 13 L; DW 14 L	5.00	4750
440/80 - 24 (17.0/80 - 24)	TL	22	168 A8	IND	455	1315	610	3986	DW 14 L	DW 13; DW 13 L; DW 15 L	5.00	5600
460/70 - 24 (17.5L - 24)	TL	-	159 A8	IND	460	1250	-	-	DW 15 L	DW 14 L; DW 16 L	4.00	4375
500/70 - 24 (19.5L - 24)	TL	-	164 A8	IND	505	1300	579	3926	DW 16 L	DW 15 L; DW 18 L	4.00	5000
26" 480/80 - 26 (18.4 - 26)	TL	-	160 A8	IND	490	1410	643	4272	DW 15 L	DW 16 L	3.20	4500
28" 440/80 - 28 (16.9 - 28)	TL	-	156 A8	IND	450	1420	632	4299	DW 14 L	DW 13; DW 13 L; DW 15 L	3.20	4000

STD: Standard
IND: Industrial



MAIN APPLICATION:
TELEHANDLER



EM 936 (E-2)

EM 936 has been specially designed for excavators and telehandlers in digging and loading operations. Besides, one size is particularly suitable for graders and loaders in grading, loading and transport applications. EM 936 features outstanding riding comfort and enhanced self-cleaning properties. It also ensures a high level of handling comfort and provides excellent traction even under heavy-duty service conditions. Its "special" version is made of a special compound.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)		
									Rec./Flange Height	Alt./Flange Height	↓		
20" 8.25 - 20	TT	14	133 B	STD	235	980	467	2970	6.5	6.0; 7.0	bar	6.75	
											km/h		
											50	2060	
9.00 - 20	TT	14	140 B	STD	256	1012	481	3070	7.0	6.5; 7.5	bar	7.00	
											km/h		
											50	2500	
9.00 - 20	TT	14	140 B	SPL	256	1012	481	3070	7.0	6.5; 7.5	bar	7.00	
											km/h		
											50	2500	
10.00 - 20	TT	16	146 B	STD	275	1050	498	3180	7.5	7.0; 8.0	bar	7.50	
											km/h		
											50	3000	
10.00 - 20	TT	16	146 B	SPL	275	1050	498	3180	7.5	7.0; 8.0	bar	7.50	
											km/h		
											50	3000	
11.00 - 20	TT	16	149 B	STD	295	1090	508	3302	8.0	7.5; 8.5	bar	7.20	
											km/h		
											50	3250	
16.0/70 - 20	TL	14	149 B/166 A2	STD	405	1090	480	3295	13 SDC	13	bar	3.50	4.50
											km/h		
											50	3250	-
											10	-	5300
16.0/70 - 20	TT/TL	14	149 B/166 A2	SPL	405	1090	480	3295	13 SDC	13	bar	3.50	4.50
											km/h		
											50	3250	-
											10	-	5300
24" 16.0/70 - 24	TL	10	143 B/162 A2	STD	410	1190	575	3600	13 SDC	13 (DC)	bar	2.50	3.20
											km/h		
											50	2725	-
											10	-	4750
16.0/70 - 24 (405/70 - 24)	TL	14	152 B/169 A2	STD	410	1190	575	3600	13 SDC	13 (DC)	bar	3.50	4.50
											km/h		
											50	3550	-
											10	-	5800
20 - 24 (22/70 - 24)	TL	12	158 B/173 A2	STD	535	1390	665	4205	16.00 T SDC	-	bar	2.50	3.00
											km/h		
											50	4250	-
											10	-	6500

STD: Standard
SPL: Special



MAIN APPLICATION:
TELEHANDLER



EM 936 LOADER SPECIAL

EM 936 LOADER SPECIAL has been specially designed for telehandlers in loading applications. It features outstanding riding comfort and enhanced self-cleaning properties. It also ensures a high level of handling comfort and provides excellent traction even under heavy-duty service conditions.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 50 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
20" 16.0/70 - 20 (405/70 - 20)	TL	14	149 B	STD	405	1090	480	3295	11	12; 11 SDC; 12 SDC; W 10; W 11	3.50	3250

STD: Standard



GRIP STAR

GRIP STAR is an agro-industrial tire for loading applications with telehandlers. It shows excellent traction and self-cleaning properties. Besides, it is an all-season tire particularly suitable for operations on muddy ground. GRIP STAR is also available in a "special" version that features extra cut and chip resistance.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
									Rec./Flange Height	Alt./Flange Height	bar	kg
24" 15.5/80 - 24	TL	16	-	STD	392	1270	569	3683	W 12	W 13; W 14 L	bar	4.00
											km/h	
											30 FR LLV	4875
15.5/80 - 24	TL	16	-	SPL	392	1270	569	3683	W 12	W 13; W 14 L	bar	4.00
											km/h	
											30 FR LLV	4875
											30 DW LLV	3450

STD: Standard
SPL: Special



MAIN APPLICATION:
TELEHANDLER



LIFT STAR

LIFT STAR is a bias-ply tire specially designed for telehandlers operating in demanding construction operations and other severe applications. Its low-profile sidewall ensures excellent stability in high-lifting operations whereas its non-directional tread design allows for greater mounting versatility. In addition, the specially designed sidewall provides added cut-and-puncture protection.



HEAVY DUTY SERVICE



STABILITY




DURABILITY



CUT & CHIP RESISTANCE

SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)				
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	↓				
370/75 - 28	TL	14	-	STD	365	1270	583	3851	11.00	-	bar	3.25	5.00		
											km/h	50	3250	-	
											10	-	5450		
400/75 - 28	TL	16	-	STD	400	1318	592	3944	12.00 GR	-	bar	3.50	5.00		
											km/h	10	3875	-	
											50	-	6300		

STD: Standard



**MAIN APPLICATION:
TELEHANDLER**



MP 567

MP 567 is an agro-industrial tire suitable for field and road transport, municipality/maintenance operations as well as soil tillage applications depending on the tire size. The MP 567 tire provides good traction in all the weather conditions as well as excellent self-cleaning properties.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)			
					Rec./Flange Height	Alt./Flange Height								
15.3"	10.0/75 - 15.3	TL	10	-	STD	258	774	355	2310	9.0	-	bar	3.90	
												km/h	1735	
												40	1550	
	10.0/75 - 15.3	TL	12	-	STD	258	774	355	2310	9.0	-	bar	4.70	
												km/h	1905	
												40	1700	
	10.0/75 - 15.3	TL	14	-	STD	258	774	355	2310	9.0	-	bar	5.50	
												km/h	2130	
												40	1900	
	10.0/75 - 15.3	TL	18	-	STD	258	774	355	2310	9.0	-	bar	7.10	
												km/h	2440	
												40	2180	
	11.5/80 - 15.3	TL	10	-	STD	292	868	393	2578	9.0	-	bar	3.40	
												km/h	2185	
												40	1950	
	11.5/80 - 15.3	TL	14	-	STD	292	868	393	2578	9.0	-	bar	4.75	
												km/h	2720	
												40	2430	
	11.5/80 - 15.3	TL	18	-	STD	292	868	393	2578	9.0	-	bar	6.00	
												km/h	3050	
												40	2725	
	18"	10.5 - 18	TT	10	-	STD	270	905	415	2768	9	9 SDC	bar	3.75
													km/h	1700
													40	1955
10.5 - 18		TL	10	-	STD	270	905	415	2768	9	9 SDC	bar	3.75	
												km/h	1700	
												40	1955	
10.5 - 18		TL	12	-	STD	270	905	415	2768	9	9 SDC	bar	4.50	
												km/h	1900	
												40	2190	
12.5 - 18		TT	10	-	STD	325	990	450	2940	11	12 SDC	bar	3.00	
												km/h	1800	
												40	2070	
12.5 - 18		TL	10	-	STD	325	990	450	2940	11	12 SDC	bar	3.00	
												km/h	1800	
												40	2070	

STD: Standard



**MAIN APPLICATION:
TELEHANDLER**



MP 567

MP 567 is an agro-industrial tire suitable for field and road transport, municipality/maintenance operations as well as soil tillage applications depending on the tire size. The MP 567 tire provides good traction in all the weather conditions as well as excellent self-cleaning properties.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)		
									Rec./Flange Height	Alt./Flange Height			
18"	12.5 - 18	TT	12	-	STD	325	990	450	2940	11	12 SDC	bar	3.50
												km/h	1950
												90	2245
	12.5 - 18	TL	12	-	STD	325	990	450	2940	11	12 SDC	bar	3.50
												km/h	1950
												90	2245
	12.5 - 18	TL	16	-	STD	325	990	450	2940	11	12 SDC	bar	4.50
												km/h	2250
												90	2585
19.5"	18 - 19.5	TL	14	-	STD	460	1104	498	3280	14.00	-	bar	4.75
												km/h	3925
												50	4150
	18 - 19.5	TL	16	-	STD	460	1104	498	3280	14.00	-	bar	6.00
												km/h	4500
												50	4700
	18 - 19.5	TL	18	-	STD	460	1104	498	3280	14.00	-	bar	7.25
												km/h	5150
												50	5460
20"	10.5 - 20	TT	10	-	STD	270	955	445	2880	9	9 SDC	bar	3.75
												km/h	1800
												90	2070
	10.5 - 20	TL	10	-	STD	270	955	445	2880	9	9 SDC	bar	3.75
												km/h	1800
												90	2070
	12.5 - 20	TT	10	-	STD	325	1040	475	3090	11.0	12 SDC	bar	3.00
												km/h	1850
												90	2130
	12.5 - 20	TL	10	-	STD	325	1040	475	3090	11.0	12 SDC	bar	3.00
												km/h	1850
												90	2130
	12.5 - 20	TT	12	-	STD	325	1040	475	3090	11.0	12 SDC	bar	3.50
												km/h	2000
												90	2300
	12.5 - 20	TL	12	-	STD	325	1040	475	3090	11.0	12 SDC	bar	3.50
												km/h	2000
												90	2300

STD: Standard



**MAIN APPLICATION:
TELEHANDLER**



MP 567

MP 567 is an agro-industrial tire suitable for field and road transport, municipality/maintenance operations as well as soil tillage applications depending on the tire size. The MP 567 tire provides good traction in all the weather conditions as well as excellent self-cleaning properties.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
					Rec./Flange Height	Alt./Flange Height	↓					
20" 14.5 - 20	TL	10	-	STD	360	1116	495	3315	11	12 SDC	bar	2.50
											km/h	2000
											90	2300
14.5 - 20	TL	12	-	STD	360	1116	495	3315	11	12 SDC	bar	3.00
											km/h	2240
											90	2580
14.5 - 20	TL	14	-	STD	360	1116	495	3315	11	12 SDC	bar	3.50
											km/h	2430
											90	2790
14.5 - 20	TL	16	-	STD	360	1116	495	3315	11	12 SDC	bar	4.00
											km/h	2575
											90	2960
14.5 - 20	TL	18	-	STD	360	1116	495	3315	11	12 SDC	bar	4.50
											km/h	2725
											90	3135
16.0/70 - 20 (405/70 - 20)	TL	14	-	STD	405	1128	490	3350	13 SDC	12	bar	3.50
											km/h	2900
											90	3340
16.0/70 - 20 (405/70 - 20)	TT	14	-	STD	405	1128	490	3350	13 SDC	12	bar	3.50
											km/h	2900
											90	3340

STD: Standard



**MAIN APPLICATION:
TELEHANDLER**




MP 590

MP 590 is an agro-industrial tire suitable for loading operations with compact loaders, telehandlers and forklifts. This tire provides good traction and excellent stability as well as high load capacity to enhance productivity.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)	
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height		
22.5" 18 - 22.5 (445/65 - 22.5)	TL	16	-	STD	480	1190	530	3534	14.0	-	bar	5.50
											km/h	4875
											40 DW	5450
18 - 22.5 (445/65 - 22.5)	TL	20	-	STD	480	1190	530	3534	14.0	-	bar	7.50
											km/h	5800
											40 DW	6500

STD: Standard



**MAIN APPLICATION:
TELEHANDLER**



MP 600

MP 600 is a road-oriented and agro-industrial tire, suitable for loading operations with compact loaders and telehandlers. This tire provides good traction and excellent stability along with an extended product life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)		
									Rec./Flange Height	Alt./Flange Height			
18"	10.5 - 18	TL	10	-	STD	272	920	420	2740	9	9 SDC	bar	3.75
												km/h	1950
												40 DW	1900
	12.5 - 18	TL	10	-	STD	308	990	450	2950	11	12 SDC	bar	3.00
												km/h	2060
												40 DW	2000
	12.5 - 18	TL	12	-	STD	308	990	450	2950	11	12 SDC	bar	3.50
												km/h	2300
												40 DW	2240
20"	400/70 - 20 (16.0/70 - 20)	TL	14	-	STD	405	1085	-	-	13 SDC	12	bar	4.00
												km/h	3550
												40 DW	3250
24"	400/70 - 24 (16.0/70 - 24)	TL	10	-	STD	405	1185	545	3530	13 SDC	12	bar	2.50
												km/h	2975
												40 DW	2900
	400/70 - 24 (16.0/70 - 24)	TL	14	-	STD	405	1185	545	3530	13 SDC	12	bar	3.50
												km/h	3650
												40 DW	3550
	400/70 - 24 (16.0/70 - 24)	TL	14	-	SPL	405	1185	545	3530	13 SDC	12	bar	3.50
												km/h	3650
												40 DW	3550
	400/70 - 24 (16.0/70 - 24)	TL	18	-	STD	405	1185	545	3530	13	12	bar	4.50
												km/h	4250
												40 DW	4125

STD: Standard
SPL: Special



MAIN APPLICATION:
TELEHANDLER



MULTIMAX MP 522

MULTIMAX MP 522 is the BKT multi-purpose tire developed for manifold agro-industrial applications. It is suitable for all digging and loading operations on vehicles such as telehandlers, compact loaders and backhoe loaders. Stability and high load capacity are its strengths as well as outstanding puncture resistance. Multimax MP 522 is the right response for all agro-industrial heavy-duty needs.



SIZE	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	RIM		LOAD CAPACITY (KG/TIRE)										
								Rec./Flange Height	Alt./Flange Height											
18" 280/80 R 18 IND	132 A8/B	STD	282	907	421	2727	350	9; 9 SDC	-											
										bar										
										km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
										50	960	1140	1300	1480	1660	1780	2000	-	-	
										40	960	1140	1300	1480	1660	1780	2000	-	-	
										30	1030	1220	1395	1585	1780	1905	2140	-	-	
										25	1070	1270	1445	1645	1845	1980	2220	-	-	
										10 Cyc.	1170	1440	1695	1950	2220	2415	2730	2880	3000	
										Static	1795	2210	2600	2990	3405	3705	4190	4420	4600	
										18.5" 340/80 R 18 IND (12.5/80 R 18)	143 A8/B	STD	343	1001	458	3002	475	11; 11 SDC; W 11	W 10; 12; 12 SDC	
bar																				
km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4											
50	1310	1555	1775	2020	2265	2430	2725	-	-											
40	1310	1555	1775	2020	2265	2430	2725	-	-											
30	1405	1665	1900	2165	2425	2600	2920	-	-											
25	1455	1725	1970	2240	2515	2695	3025	-	-											
10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090											
Static	2450	3010	3545	4080	4640	5050	5710	6020	6270											
20" 340/80 R 20 IND	144 A8/B	STD	343	1052	481	3212	500	11	W10; 11 SDC; W11; 12; 12 SDC											
										bar										
										km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
										50	1345	1600	1820	2075	2325	2495	2800	-	-	
										40	1345	1600	1820	2075	2325	2495	2800	-	-	
										30	1440	1710	1950	2220	2490	2670	3000	-	-	
										25	1495	1775	2025	2305	2585	2770	3110	-	-	
										10 Cyc.	1640	2020	2375	2730	3110	3385	3825	4035	4200	
										Static	2515	3095	3640	4190	4770	5185	5865	6185	6440	
										20.5" 380/75 R 20 IND (14.5 R 20)	148 A8/B	STD	384	1074	483	3251	500	W 12	W 11; 11; 12	
bar																				
km/h	1.6	2.0	2.4	2.8	3.2	3.6	3.8	4.0	4.2											4.4
50	1500	1770	2040	2305	2575	2860	3005	3150	-											-
40	1500	1770	2040	2305	2575	2860	3005	3150	-											-
30	1610	1900	2195	2490	2780	3075	3220	3370	-											-
25	1670	1975	2280	2585	2890	3195	3350	3500	-											-
10 Cyc.	1850	2260	2670	3080	3490	3900	4110	4315	4520											4730
Static	2840	3470	4100	4730	5360	5990	6305	6620	6935											7250
21" 400/70 R 20 IND (16.0/70 R 20)	149 A8/B	STD	404	1068	476	3199	525	13	12 SDC; 13 SDC; 14											
										bar										
										km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
										50	1560	1855	2115	2405	2700	2895	3250	-	-	
										40	1560	1855	2115	2405	2700	2895	3250	-	-	
										30	1675	1985	2265	2580	2890	3100	3480	-	-	
										25	1735	2060	2350	2675	3000	3215	3610	-	-	
										10 Cyc.	1905	2340	2755	3170	3610	3925	4440	4680	4875	
										Static	2920	3590	4225	4860	5535	6020	6805	7180	7475	

STD: Standard



MAIN APPLICATION:
TELEHANDLER



MULTIMAX MP 522

MULTIMAX MP 522 is the BKT multi-purpose tire developed for manifold agro-industrial applications. It is suitable for all digging and loading operations on vehicles such as telehandlers, compact loaders and backhoe loaders. Stability and high load capacity are its strengths as well as outstanding puncture resistance. Multimax MP 522 is the right response for all agro-industrial heavy-duty needs.



SIZE	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	RIM		LOAD CAPACITY (KG/TIRE)																				
								Rec./Flange Height	Alt./Flange Height	↓																				
										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4											
										km/h	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4						
24" 400/70 R 24 IND	152 A8/B	STD	404	1170	533	3527	575	13	DW 12; 13 SDC; DW 13; DW 13 L; DW 14 L	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4											
										km/h	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4						
										50	1705	2025	2310	2630	2950	3160	3550	-	-											
										40	1705	2025	2310	2630	2950	3160	3550	-	-											
										30	1825	2170	2470	2815	3155	3385	3800	-	-											
										25	1895	2250	2565	2920	3275	3515	3945	-	-											
										10 Cyc	2080	2560	3010	3465	3945	4290	4850	5115	5325											
Static	3185	3920	4615	5310	6045	6575	7435	7840	8165																					
400/80 R 24 IND	162 A8/B	STD	404	1250	553	3778	600	DW 13	DW 12; DW 13 L; DW 14 L	bar	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4						
										km/h	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4						
										50	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-						
										40	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-						
										30	1985	2340	2750	3105	3460	3590	3770	4170	4515	4745	4860	5085	-	-						
										25	2060	2430	2850	3220	3590	3725	3910	4330	4690	4925	5040	5275	-	-						
										10 Cyc	2280	2785	3280	3850	4350	4600	4845	5280	5845	6090	6330	6655	6810	7125						
Static	3500	4270	5030	5900	6670	7050	7430	8100	8960	9340	9710	10205	10445	10925																
440/80 R 24 IND	161 A8/B	STD	441	1314	586	3956	625	DW 14 L	DW 13; DW 13 L; DW 15 L	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4											
										km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4											
										50	2220	2640	3010	3425	3840	4120	4625	-	-											
										40	2220	2640	3010	3425	3840	4120	4625	-	-											
										30	2380	2825	3220	3665	4110	4410	4950	-	-											
										25	2465	2930	3340	3800	4265	4575	5135	-	-											
										10 Cyc	2710	3335	3925	4515	5140	5590	6320	6665	6940											
Static	4150	5110	6015	6920	7875	8570	9685	10215	10640																					
460/70 R 24 IND (17.5L R 24)	159 A8/B	STD	465	1250	568	3766	600	DW 15 L	DW 14 L; DW 16 L	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4											
										km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4											
										50	2100	2495	2845	3240	3635	3895	4375	-	-											
										40	2100	2495	2845	3240	3635	3895	4375	-	-											
										30	2250	2675	3050	3470	3890	4170	4685	-	-											
										25	2335	2775	3160	3600	4035	4330	4860	-	-											
										10 Cyc	2565	3155	3710	4270	4860	5285	5975	6305	6565											
Static	3930	4835	5690	6545	7450	8105	9160	9665	10065																					
500/70 R 24 IND (19.5L R 24)	164 A8/B	STD	503	1310	595	3890	625	DW 16 L	DW 15 L; DW 18 L	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4											
										km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4											
										50	2400	2850	3250	3700	4150	4450	5000	-	-											
										40	2400	2850	3250	3700	4150	4450	5000	-	-											
										30	2570	3050	3480	3960	4445	4765	5350	-	-											
										25	2665	3165	3610	4110	4610	4940	5550	-	-											
										10 Cyc	2925	3600	4240	4875	5550	6040	6825	7200	7500											
Static	4485	5520	6500	7475	8510	9260	10465	11040	11500																					

STD: Standard



MAIN APPLICATION:
TELEHANDLER




MULTIMAX MP 522

MULTIMAX MP 522 is the BKT multi-purpose tire developed for manifold agro-industrial applications. It is suitable for all digging and loading operations on vehicles such as telehandlers, compact loaders and backhoe loaders. Stability and high load capacity are its strengths as well as outstanding puncture resistance. Multimax MP 522 is the right response for all agro-industrial heavy-duty needs.



SIZE	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	RIM		LOAD CAPACITY (KG/TIRE)												
								Rec./Flange Height	Alt./Flange Height													
24"	540/70 R 24 IND	168 A8/B	STD	530	1366	611	4133	650	DW 16 L	DW 18 L												
											bar											
											km/h											
											50	2690	3195	3640	4145	4650	4985	5600	-	-	-	-
											40	2690	3195	3640	4145	4650	4985	5600	-	-	-	-
											30	2880	3420	3900	4440	4980	5340	5995	-	-	-	-
											25	2990	3550	4045	4605	5165	5540	6220	-	-	-	-
											10 Cyc.	3280	4035	4750	5460	6220	6765	7645	8065	8400	-	-
Static	5025	6185	7280	8375	9535	10370	11725	12365	12880	-	-											
26"	480/80 R 26 IND	160 A8/B	STD	479	1428	638	4287	675	DW 15 L	DW 16 L												
											bar											
											km/h											
											50	2610	3060	3330	3555	3780	4005	4275	4500	-	-	
											40	2610	3060	3330	3555	3780	4005	4275	4500	-	-	
											30	2795	3275	3565	3805	4045	4290	4575	4815	-	-	
											25	2900	3400	3700	3950	4200	4450	4750	4995	-	-	
											10 Cyc.	3175	3915	4255	4590	4995	5335	5670	6075	6415	6750	
Static	4865	6005	6525	7040	7660	8180	8695	9315	9835	10350												
28"	440/80 R 28 IND	156 A8/B	STD	441	1415	643	4278	675	DW 14 L	DW 13; DW 13 L; DW 15 L												
											bar											
											km/h											
											50	2300	2725	2940	3150	3360	3575	3790	4000	-	-	
											40	2300	2725	2940	3150	3360	3575	3790	4000	-	-	
											30	2480	2930	3155	3380	3605	3830	4055	4280	-	-	
											25	2570	3040	3270	3505	3740	3970	4205	4440	-	-	
											10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000	
Static	4360	5330	5810	6295	6780	7265	7750	8230	8715	9200												

STD: Standard



MAIN APPLICATION:
TELEHANDLER



MULTIMAX MP 527

MULTIMAX MP 527 is a multi-purpose radial tire designed for telehandlers in industrial applications. The tire shows an aggressive tread design providing excellent traction under any service condition. The strong sidewall ensures outstanding stability in lift mode. MULTIMAX MP 527 also features a strong puncture-resistant casing and is made of a special cut-and-chip-resistant compound providing extraordinary durability and a long service life.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)																										
									Rec./Flange Height	Alt./Flange Height	↓																										
												bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
18"	340/80 R 18 IND	TL	-	143 A8/B	STD	343	1001	455	2944	11; 11 SDC; W 11	W 10; 12; 12 SDC	km/h	50	40	30	25	10 Cyc.	Static	2450	3010	3545	4080	4640	5050	5710	6020	6270										
												bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
												km/h	50	40	30	25	10 Cyc.	Static	2450	3010	3545	4080	4640	5050	5710	6020	6270										
												bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
												km/h	50	40	30	25	10 Cyc.	Static	2380	2930	3445	3965	4515	4910	5550	5855	6095										
												bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
												km/h	50	40	30	25	10 Cyc.	Static	2380	2930	3445	3965	4515	4910	5550	5855	6095										
20"	340/80 R 20 IND	TL	-	144 A8/B	STD	343	1052	-	-	11	W10; 11 SDC; W11; 12; 12 SDC	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
												km/h	50	40	30	25	10 Cyc.	Static	2515	3095	3640	4190	4770	5185	5865	6185	6440										
												bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
												km/h	50	40	30	25	10 Cyc.	Static	2920	3590	4225	4860	5535	6020	6805	7180	7475										
												bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
												km/h	50	40	30	25	10 Cyc.	Static	2920	3590	4225	4860	5535	6020	6805	7180	7475										
												bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
km/h	50	40	30	25	10 Cyc.	Static	3185	3920	4615	5310	6045	6575	7435	7840	8165																						
24"	400/70 R 24 IND	TL	-	152 A8/B	STD	404	1170	-	-	13	DW 12; DW 13; DW 13 L; 13 SDC; DW 14 L	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
												km/h	50	40	30	25	10 Cyc.	Static	3185	3920	4615	5310	6045	6575	7435	7840	8165										
												bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
												km/h	50	40	30	25	10 Cyc.	Static	3185	3920	4615	5310	6045	6575	7435	7840	8165										
												bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																
												km/h	50	40	30	25	10 Cyc.	Static	3185	3920	4615	5310	6045	6575	7435	7840	8165										
												bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																

STD: Standard



**MAIN APPLICATION:
TELEHANDLER**




MULTIMAX MP 527

MULTIMAX MP 527 is a multi-purpose radial tire designed for telehandlers in industrial applications. The tire shows an aggressive tread design providing excellent traction under any service condition. The strong sidewall ensures outstanding stability in lift mode. MULTIMAX MP 527 also features a strong puncture-resistant casing and is made of a special cut-and-chip-resistant compound providing extraordinary durability and a long service life.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)														
									Rec./Flange Height	Alt./Flange Height	↓														
											bar	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4
											km/h	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4
24" 400/80 R 24 IND	TL	-	162 A8/B	STD	404	1250	578	3834	DW 13	DW 12; DW 13 L; DW 14 L	bar	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4
											km/h	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4
											50	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-
											40	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-
											30	1985	2340	2750	3105	3460	3590	3770	4170	4515	4745	4860	5085	-	-
											25	2060	2430	2850	3220	3590	3725	3910	4330	4690	4925	5040	5275	-	-
											10 Cyc.	2280	2785	3280	3850	4350	4600	4845	5280	5845	6090	6330	6655	6810	7125
Static	3500	4270	5030	5900	6670	7050	7430	8100	8960	9340	9710	10205	10445	10925											
440/80 R 24 IND	TL	-	161 A8/B	STD	441	1314	601	3985	DW 14 L	DW 13; DW 13 L; DW 15 L	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											50	2220	2640	3010	3425	3840	4120	4625	-	-					
											40	2220	2640	3010	3425	3840	4120	4625	-	-					
											30	2380	2825	3220	3665	4110	4410	4950	-	-					
											25	2465	2930	3340	3800	4265	4575	5135	-	-					
											10 Cyc.	2710	3335	3925	4515	5140	5590	6320	6665	6940					
Static	4150	5110	6015	6920	7875	8570	9685	10215	10640																
460/70 R 24 IND (17.5L R 24)	TL	-	159 A8/B	STD	465	1254	574	3801	DW 15 L	DW 14 L; DW 16 L	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											50	2100	2495	2845	3240	3635	3895	4375	-	-					
											40	2100	2495	2845	3240	3635	3895	4375	-	-					
											30	2250	2675	3050	3470	3890	4170	4685	-	-					
											25	2335	2775	3160	3600	4035	4330	4860	-	-					
											10 Cyc.	2565	3155	3710	4270	4860	5285	5975	6305	6565					
Static	3930	4835	5690	6545	7450	8105	9160	9665	10065																
500/70 R 24 IND	TL	-	164 A8/B	STD	503	1310	597	4019	DW 16 L	DW 15 L; DW 18 L	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											km/h	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											50	2400	2850	3250	3700	4150	4450	5000	-	-					
											40	2400	2850	3250	3700	4150	4450	5000	-	-					
											30	2570	3050	3480	3960	4445	4765	5350	-	-					
											25	2665	3165	3610	4110	4610	4940	5550	-	-					
											10 Cyc.	2925	3600	4240	4875	5550	6040	6825	7200	7500					
Static	4485	5520	6500	7475	8510	9260	10465	11040	11500																
26" 480/80 R 26	TL	-	160 A8/B	STD	479	1428	642	4259	DW 15 L	DW 16 L	bar	1.6	2.0	2.2	2.4	2.6	2.8	3.2	3.2	3.4	3.6				
											km/h	1.6	2.0	2.2	2.4	2.6	2.8	3.2	3.2	3.4	3.6				
											50	2610	3060	3330	3555	3780	4005	4275	4500	-	-				
											40	2610	3060	3330	3555	3780	4005	4275	4500	-	-				
											30	2795	3275	3565	3805	4045	4290	4575	4815	-	-				
											25	2900	3400	3700	3950	4200	4450	4750	4995	-	-				
											10 Cyc.	3175	3915	4255	4590	4995	5335	5670	6075	6415	6750				
Static	4865	6005	6525	7040	7660	8180	8695	9315	9835	10350															

STD: Standard



MAIN APPLICATION:
TELEHANDLER



MULTIMAX MP 527

MULTIMAX MP 527 is a multi-purpose radial tire designed for telehandlers in industrial applications. The tire shows an aggressive tread design providing excellent traction under any service condition. The strong sidewall ensures outstanding stability in lift mode. MULTIMAX MP 527 also features a strong puncture-resistant casing and is made of a special cut-and-chip-resistant compound providing extraordinary durability and a long service life.



TRACTION



STABILITY



HIGH PUNCTURE
RESISTANCE



CUT & CHIP
RESISTANCE



DURABILITY

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)																	
									Rec./Flange Height	Alt./Flange Height																		
28" 440/80 R 28 IND	TL	-	156 A8/B	STD	441	1415	648	4270	DW 14 L	DW 13; DW 13 L; DW 15 L																		
											bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6							
											km/h																	
											50	2300	2725	2940	3150	3360	3575	3790	4000	-	-							
											40	2300	2725	2940	3150	3360	3575	3790	4000	-	-							
											30	2480	2930	3155	3380	3605	3830	4055	4280	-	-							
25	2570	3040	3270	3505	3740	3970	4205	4440	-	-																		
10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000																		
Static	4360	5330	5810	6295	6780	7265	7750	8230	8715	9200																		

STD: Standard



MAIN APPLICATION:
TELEHANDLER



RT 747 AGRO INDUSTRIAL

RT 747 AGRO INDUSTRIAL is a radial agro-industrial tire suitable for backhoe loaders, compact loaders and telehandlers. Its extra wide lugs provide excellent grip and great stability in lift operations. RT 747 AGRO INDUSTRIAL is the right answer to all general farming operations that need outstanding versatility.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)						
									Rec./Flange Height	Alt./Flange Height	↓						
											bar	1.2	1.6	2.0	2.4	2.8	3.2
24" 460/70 R 24 (17.5L R 24)	TL	-	152 A8/149 B	STD	465	1254	556	3840	DW 15 L	DW 14 L; DW 16 L	km/h	50	40	30	25	10 Cyc	Static
											1530	1885	2210	2570	2985	3250	
											1670	2060	2415	2805	3160	3550	
											1785	2205	2585	3000	3380	3800	
											1850	2285	2680	3115	3505	3940	
											2505	3090	3620	4205	4740	5325	
											3505	4325	5070	5890	6635	7455	
500/70 R 24 (19.5L R 24)	TL	-	157 A8/154 B	STD	485	1320	585	3949	DW 16 L	DW 15 L; DW 18 L	bar	50	40	30	25	10 Cyc	Static
											km/h	1765	2175	2550	2965	3340	3750
											1940	2395	2805	3260	3670	4125	
											2075	2560	3000	3490	3930	4415	
											2155	2655	3115	3620	4075	4580	
											2910	3590	4210	4890	5510	6190	
											4075	5025	5890	6845	7710	8665	

STD: Standard



MAIN APPLICATION:
TELEHANDLER



TR 461

TR 461 is a BKT pattern suitable for municipality and maintenance applications with tractors as well as for loading operations with telehandlers. The sidewall protection features particular resistance against cuts and bruises providing a longer life even on hard surfaces in addition to excellent stability.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 40 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
18" 12.5/80 - 18	TL	12	138 A8	STD	305	987	435	2902	W 9	11	3.70	2360
24" 16.9 - 24	TL	14	151 A8	STD	440	1280	566	3763	DW 15 L	DW 14 L	2.90	3450
19.5L - 24	TL	12	151 A8	STD	490	1310	578	3851	DW 16 L	-	2.30	3450
19.5L - 24	TL	14	154 A8	STD	490	1310	578	3851	DW 16 L	-	2.60	3750
21L - 24	TL	14	157 A8	STD	540	1385	607	4072	DW 18 L	-	2.50	4125
28" 16.9 - 28	TL	14	154 A8	STD	440	1390	620	4087	DW 15 L	DW 14 L	2.90	3750

STD: Standard



MAIN APPLICATION:
LIGHT TRUCK



LT TR 182

LT TR 182 is suitable for transport operations on light trucks. This high-speed tire is road oriented and significantly reduces fuel consumption. The LT TR 182 tire is also easy to mount.



14.5"

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
									Rec./Flange Height	Alt./Flange Height		
8 - 14.5	TL	12	-	STD	207	710	-	-	6.00 MH	-	bar	6.90
											km/h	1285
											100 LS	1130
											100 LD	
8 - 14.5	TL	14	-	STD	207	710	-	-	6.00 MH	-	bar	7.90
											km/h	1375
											100 LS	1210
											100 LD	

STD: Standard



TUF LUG

TUF LUG is suitable for trailers and light trucks in transport applications. This tire offers good traction and great durability and ensures a long product life-cycle.



16"

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
									Rec./Flange Height	Alt./Flange Height		
7.50 - 16	TT	12	-	STD	216	830	-	-	6.00 G	5.50 F	bar	6.20
											km/h	1400
											100 LS	1250
											100 LD	
7.50 - 16	TT	14	-	STD	216	830	-	-	6.00 G	5.50 F	bar	6.90
											km/h	1500
											100 LS	1320
											100 LD	
7.50 - 16	TT	16	-	STD	216	830	-	-	6.00 G	5.50 F	bar	7.60
											km/h	1600
											100 LS	1400
											100 LD	

STD: Standard



**MAIN APPLICATION:
LOW PLATFORM**



IT 400

IT 400 is a road-oriented rib-pattern tire for low platforms in transport applications. The tire is suitable for high-speed applications and provides significant fuel savings.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)			
									Rec./Flange Height	Alt./Flange Height				
15" 7.50 - 15	TT	16	-	STD	210	795	356	2361	6.0	5.50 F; 6.50	bar			
											km/h	9.90	9.20	
											15	2880	-	
											30	-	2375	
8.25 - 15	TT/TL	14	-	STD	239	846	377	2513	6.50	6.0; 7.0	bar			
											km/h	8.60	7.90	7.20
											15	2960	-	-
											30	-	2440	-
											100 LS	-	1850	-
											100 LD	-	-	1650
8.25 - 15	TT	16	-	STD	239	846	377	2513	6.50	6.0; 7.0	bar			
											km/h	9.70	9.00	8.30
											15	3150	-	-
											30	-	2600	-
											100 LS	-	1950	-
											100 LD	-	-	1700
10.00 - 15	TT	14	-	STD	274	925	408	2747	7.5	7.0; 8.0	bar			
											km/h	7.60	6.90	6.20
											15	3680	-	-
											30	-	3035	-
											100 LS	-	2300	-
											100 LD	-	-	2060
10.00 - 15	TT	16	-	STD	274	925	408	2747	7.5	7.0; 8.0	bar			
											km/h	8.60	7.90	7.20
											15	4120	-	-
											30	-	3400	-
											100 LS	-	2575	-
											100 LD	-	-	2240
10.00 - 15	TT	18	-	STD	274	925	408	2747	7.5	7.0; 8.0	bar			
											km/h	9.70	8.90	8.10
											15	4510	-	-
											30	-	3640	-
											100 LS	-	2725	-
											100 LD	-	-	2360

STD: Standard



LP 450

LP 450 is a road-oriented tire for low platforms in transport applications. This high-speed tire provides significant fuel savings as well as an extended tire life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
									Rec./Flange Height	Alt./Flange Height		
14.5" 8 - 14.5	TL	12	-	STD	214	710	321	2109	6.00 MH	-	bar	
											km/h	6.90
											100 LS	1285
											100 LD	1130
9 - 14.5	TL	12	-	STD	246	712	322	2115	7.00 MH	-	bar	
											km/h	6.90
											100 LS	1500
											100 LD	1320
9 - 14.5	TL	14	-	STD	246	712	322	2115	7.00 MH	-	bar	
											km/h	7.90
											100 LS	1625
											100 LD	1430

STD: Standard



MAIN APPLICATION:
MOBILE HOME



MH TR 182

MH TR 182 is suitable for transport operations with mobile home vehicles. It is a road-oriented, high-speed tire that significantly reduces fuel consumption. MH TR 182 ensures long durability and high performance along the entire product life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 100 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
14.5" 8 - 14.5	TL	8	-	STD	207	710	-	-	6.00 MH	-	4.80	1030
8 - 14.5	TL	10	-	STD	207	710	-	-	6.00 MH	-	5.90	1180
8 - 14.5	TL	12	-	STD	207	710	-	-	6.00 MH	-	6.90	1285
8 - 14.5	TL	14	-	STD	207	710	-	-	6.00 MH	-	7.60	1390

STD: Standard



ST 195

ST 195 is a road-oriented tire for transport operations with mobile home vehicles. It provides significant fuel savings as well as an extended tire life-cycle. ST 195 allows carrying high loads at low pressure.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 100 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
9" 6.00 - 9	TT	-	-	STD	165	540	-	-	4.00	-	6.90	2750
6.00 - 9	TL	-	-	STD	165	540	-	-	4.00	-	6.90	2750

STD: Standard



MAIN APPLICATION:
MOBILE HOME



LT TR 182

LT TR 182 is suitable for transport operations on light trucks. This high-speed tire is road oriented and significantly reduces fuel consumption. The LT TR 182 tire is also easy to mount.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)		
									Rec./Flange Height	Alt./Flange Height	↓		
14.5" 8 - 14.5	TL	12	-	STD	207	710	-	-	6.00	MH	-	bar	
												km/h	6.90
												100 LS	1285
8 - 14.5	TL	14	-	STD	207	710	-	-	6.00	MH	-	bar	
												km/h	7.90
												100 LS	1375
												100 LD	1130
												100 LD	1210

STD: Standard



**MAIN APPLICATION:
IMPLEMENT MACHINERY**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	Type	PR	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)
										Rec./Flange Height	Alt./Flange Height	
15.3" 10.0/75 - 15.3	TT	8	119 A8	106 A8	STD	264	780	345	2285	9.00	-	bar
												3.10
												km/h
												30 FR
												1525
												40 FR
1360												
30 DW												
1065												
40 DW												
950												
10.0/75 - 15.3	TL	8	119 A8	106 A8	STD	264	780	345	2285	9.00	-	bar
												3.10
												km/h
												30 FR
												1525
												40 FR
1360												
30 DW												
1065												
40 DW												
950												
10.0/75 - 15.3	TL	8	119 A8	106 A8	IND	264	780	345	2285	9.00	-	bar
												3.10
												km/h
												30 FR
												1525
												40 FR
1360												
30 DW												
1065												
40 DW												
950												
10.0/75 - 15.3	TL	10	123 A8	111 A8	STD	264	780	345	2285	9.00	-	bar
												3.90
												km/h
												30 FR
												1735
												40 FR
1550												
30 DW												
1220												
40 DW												
1090												
10.0/75 - 15.3	TL	14	130 A8	118 A8	STD	264	780	345	2285	9.00	-	bar
												5.50
												km/h
												30 FR
												2130
												40 FR
1900												
30 DW												
1480												
40 DW												
1320												
10.0/75 - 15.3	TT	18	135 A8	122 A8	STD	264	780	345	2285	9.00	-	bar
												7.10
												km/h
												30 FR
												2440
												40 FR
2180												
30 DW												
1680												
40 DW												
1500												

STD: Standard
IND: Industrial



**MAIN APPLICATION:
IMPLEMENT MACHINERY**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	Type	PR	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Rec./Flange Height	RIM Alt./Flange Height	LOAD CAPACITY (KG/TIRE)	
												bar	km/h
15.3" 10.0/75 - 15.3	TL	18	135 A8	122 A8	STD	264	780	345	2285	9.00	-	bar	7.10
												km/h	2440
												30 FR	2180
												30 DW	1680
												40 DW	1500
11.5/80 - 15.3	TT	8	126 A8	114 A8	STD	290	867	380	2540	9.00	-	bar	2.70
												km/h	1905
												30 FR	1700
												30 DW	1320
												40 DW	1180
11.5/80 - 15.3	TL	8	126 A8	114 A8	STD	290	867	380	2540	9.00	-	bar	2.70
												km/h	1905
												30 FR	1700
												30 DW	1320
												40 DW	1180
11.5/80 - 15.3	TL	10	131 A8	119 A8	STD	290	867	380	2540	9.00	-	bar	3.40
												km/h	2185
												30 FR	1950
												30 DW	1525
												40 DW	1360
11.5/80 - 15.3	TT	12	135 A8	123 A8	STD	290	867	380	2540	9.00	-	bar	4.10
												km/h	2440
												30 FR	2180
												30 DW	1735
												40 DW	1550

STD: Standard



**MAIN APPLICATION:
IMPLEMENT MACHINERY**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	Type	PR	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)		
										Rec./Flange Height	Alt./Flange Height			
15.3"	11.5/80 - 15.3	TL	12	135 A8	123 A8	STD	290	867	380	2540	9.00	-	bar	4.10
													km/h	2440
													30 FR	2180
													30 DW	1735
													40 DW	1550
													40 DW	1550
11.5/80 - 15.3	TT	14	139 A8	126 A8	STD	290	867	380	2540	9.00	-	bar	4.80	
												km/h	2720	
												30 FR	2430	
												30 DW	1905	
												40 DW	1700	
												40 DW	1700	
11.5/80 - 15.3	TL	14	139 A8	126 A8	STD	290	867	380	2540	9.00	-	bar	4.80	
												km/h	2720	
												30 FR	2430	
												30 DW	1905	
												40 DW	1700	
												40 DW	1700	
27 X 10 - 15.3	TT	8	107 A8	95 A8	STD	260	695	317	2071	9.00	-	bar	3.10	
												km/h	1090	
												30 FR	975	
												30 DW	775	
												40 DW	690	
												40 DW	690	
27 X 10 - 15.3	TL	8	107 A8	95 A8	STD	260	695	317	2071	9.00	-	bar	3.10	
												km/h	1090	
												30 FR	975	
												30 DW	775	
												40 DW	690	
												40 DW	690	
16"	6.00 - 16	TT	6	95 A8	83 A8	STD	164	735	343	2190	4.00 E	4.50 E; 4½ K	bar	2.80
													km/h	775
													30 FR	690
													30 DW	545
													40 DW	485
													40 DW	485

STD: Standard



**MAIN APPLICATION:
IMPLEMENT MACHINERY**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	Type	PR	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)
						↓	↓	↓	↓	Rec./Flange Height	Alt./Flange Height	
16" 7.50 - 16	TT	6	104 A8	92 A8	STD	209	803	372	2393	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	bar
												km/h
												30 FR
												40 FR
												30 DW
40 DW												
7.50 - 16	TT	8	112 A8	99 A8	STD	209	803	372	2393	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	bar
												km/h
												30 FR
												40 FR
												30 DW
40 DW												
7.50 - 16	TL	8	112 A8	99 A8	STD	209	803	372	2393	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	bar
												km/h
												30 FR
												40 FR
												30 DW
40 DW												
7.50 - 16	TT	8	112 A8	99 A8	HD	209	803	372	2393	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	bar
												km/h
												30 FR
												40 FR
												30 DW
40 DW												
9.0/70 - 16	TL	10	119 A8	106 A8	STD	222	760	355	2285	W 7	-	bar
												km/h
												30 FR
												40 FR
												30 DW
40 DW												
270/75 - 16 (10.0/75 - 16)	TL		123 A8	111 A8	-	250	810	-	-	9.00	-	bar
												km/h
												10 FR
												25 FR
												30 FR
40 FR												
10 DW												
25 DW												
30 DW												
40 DW												

STD: Standard
HD: Heavy Duty



**MAIN APPLICATION:
IMPLEMENT MACHINERY**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	Type	PR	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
										Rec./Flange Height	Alt./Flange Height		
17" 15.0/55 - 17	TL	10	134 A8	122 A8	STD	380	890	395	2608	13.00	13	bar	
												2.60	
												30 FR	2375
												40 FR	2120
												30 DW	1680
												40 DW	1500
15.0/55 - 17	TL	14	141 A8	129 A8	STD	380	890	395	2608	13.00	13	bar	
												3.60	
												30 FR	2885
												40 FR	2575
												30 DW	2070
												40 DW	1850
19.0/45 - 17	TL	14	144 A8	131 A8	STD	465	865	389	2578	16.00	-	bar	
												2.80	
												30 FR	3135
												40 FR	2800
												30 DW	2185
												40 DW	1950
420/55 - 17	TL	14	142 A8	129 A8	STD	430	910	407	2712	13.00	-	bar	
												3.00	
												30 FR	2970
												40 FR	2650
												30 DW	2070
												40 DW	1850
420/55 - 17	TL	16	145 A8	133 A8	STD	430	910	407	2712	13.00	-	bar	
												3.50	
												30 FR	3250
												40 FR	2900
												30 DW	2305
												40 DW	2060

STD: Standard



**MAIN APPLICATION:
IMPLEMENT MACHINERY**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	Type	PR	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
										Rec./Flange Height	Alt./Flange Height		
18" 7.50 - 18	TT	6	106 A8	94 A8	STD	209	854	407	2649	5.50 F	4.50 E; 6.00 F; 5.00 F	bar	2.30
												km/h	1065
												30 FR	950
												30 DW	750
												40 DW	670
7.50 - 18	TT	8	114 A8	101 A8	STD	209	854	407	2649	5.50 F	4.50 E; 6.00 F; 5.00 F	bar	3.10
												km/h	1320
												30 FR	1180
												30 DW	925
												40 DW	825
10.5/80 - 18	TL	10	131 A8	119 A8	STD	274	907	405	2657	W 9	9; W 8	bar	3.70
												km/h	2185
												30 FR	1950
												30 DW	1525
												40 DW	1360
12.5/80 - 18	TL	12	142 A8	129 A8	STD	308	987	438	2892	W 9	9; 11	bar	3.70
												km/h	2970
												30 FR	2650
												30 DW	2070
												40 DW	1850
12.5/80 - 18	TL	12	142 A8	129 A8	SPL	308	987	438	2892	W 9	9; 11	bar	3.70
												km/h	2970
												30 FR	2650
												30 DW	2070
												40 DW	1850
12.5/80 - 18	TL	16	148 A8	135 A8	STD	308	987	438	2892	W 9	9; 11	bar	4.90
												km/h	3530
												30 FR	3150
												30 DW	2440
												40 DW	2180

STD: Standard
SPL: Special



**MAIN APPLICATION:
IMPLEMENT MACHINERY**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	Type	PR	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)		
										Rec./Flange Height	Alt./Flange Height			
18"	12.5/80 - 18	TL	18	150 A8	138 A8	STD	308	987	438	2892	W 9	9; 11	bar	5.50
													km/h	3750
													30 FR	3350
													30 DW	2645
													40 DW	2360
20"	7.50 - 20	TT	8	116 A8	103 A8	STD	209	904	422	2695	5.50 F	4.50 E; 6.00 F; 5.00 F	bar	3.20
													km/h	1400
													30 FR	1250
													30 DW	980
													40 DW	875
	16.0/70 - 20	TL	10	147 A8	135 A8	STD	408	1097	487	3214	13	12 SDC; 14; 13 SDC	bar	2.50
													km/h	3445
													30 FR	3075
													30 DW	2440
													40 DW	2180
	16.0/70 - 20	TL	12	151 A8	139 A8	STD	408	1097	487	3214	13	12 SDC; 14; 13 SDC	bar	3.00
													km/h	3865
													30 FR	3450
													30 DW	2720
													40 DW	2430
	16.0/70 - 20	TL	14	154 A8	142 A8	STD	408	1097	487	3214	13	12 SDC; 14; 13 SDC	bar	3.50
													km/h	4200
													30 FR	3750
													30 DW	2970
													40 DW	2650
16.0/70 - 20	TL	16	156 A8	144 A8	STD	408	1097	487	3214	13	12 SDC; 14; 13 SDC	bar	4.00	
												km/h	4480	
												30 FR	4000	
												30 DW	3135	
												40 DW	2800	
400/70 - 20	TL	-	-	-	IND	408	1097	487	3214	13	12 SDC; 14; 13 SDC	bar	4.00	
												km/h	3380	
												30	3250	
												40		

STD: Standard
IND: Industrial



**MAIN APPLICATION:
IMPLEMENT MACHINERY**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	Type	PR	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
										Rec./Flange Height	Alt./Flange Height		
24" 15.5/80 - 24	TL	10	154 A8	142 A8	STD	384	1262	566	3655	W 12	W 13; W 14 L	bar	2.50
												km/h	4200
												30 FR	3750
												30 DW	2970
												40 DW	2650
												bar	3.00
15.5/80 - 24	TL	12	157 A8	145 A8	STD	384	1262	566	3655	W 12	W 13; W 14 L	bar	3.00
												km/h	4620
												30 FR	4125
												30 DW	3250
												40 DW	2900
												bar	3.50
15.5/80 - 24	TL	14	160 A8	148 A8	STD	384	1262	566	3655	W 12	W 13; W 14 L	bar	3.50
												km/h	5040
												30 FR	4500
												30 DW	3530
												40 DW	3150
												bar	3.50
15.5/80 - 24	TL	14	160 A8	148 A8	SPL	384	1262	566	3655	W 12	W 13; W 14 L	bar	3.50
												km/h	5040
												30 FR	4500
												30 DW	3530
												40 DW	3150
												bar	4.00
15.5/80 - 24	TL	16	163 A8	151 A8	STD	384	1262	566	3655	W 12	W 13; W 14 L	bar	4.00
												km/h	5460
												30 FR	4875
												30 DW	3865
												40 DW	3450
												bar	2.40
16.5/85 - 24	TL	10	158 A8	146 A8	STD	415	1325	591	3837	W 13	W 14 L; W 15 L	bar	2.40
												km/h	4760
												30 FR	4250
												30 DW	3360
												40 DW	3000
												bar	2.40

STD: Standard
SPL: Special



**MAIN APPLICATION:
IMPLEMENT MACHINERY**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	Type	PR	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
										Rec./Flange Height	Alt./Flange Height		
24" 16.5/85 - 24	TL	12	163 A8	151 A8	STD	415	1325	591	3837	W 13	W 14 L; W 15 L	bar	
												2.80	
												km/h	
												30 FR	5460
												40 FR	4875
												30 DW	3865
40 DW	3450												
16.5/85 - 24	TT	16	168 A8	155 A8	STD	415	1325	591	3837	W 13	W 14 L; W 15 L	bar	
												3.80	
												km/h	
												30 FR	6270
												40 FR	5600
												30 DW	4340
40 DW	3875												
16.5/85 - 24	TL	16	168 A8	155 A8	STD	415	1325	591	3837	W 13	W 14 L; W 15 L	bar	
												3.80	
												km/h	
												30 FR	6270
												40 FR	5600
												30 DW	4340
40 DW	3875												
400/80 - 24	TL	-	-	156 A8	IND	394	1262	566	3655	W 13	W 12; W 14 L	bar	
												3.80	
												km/h	
												30	4160
400/80 - 24	TL	-	-	162 A8	IND	394	1262	566	3655	W 13	W 12; W 14 L	bar	
												5.00	
												km/h	
30	4940												
40	4750												

STD: Standard
IND: Industrial



MAIN APPLICATION:
TRAILER



BK 6060

BK 6060 is a both field- and road-oriented tire for trailers and backhoe loaders in transport as well as digging and loading applications. This block pattern tire provides an extended tire life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 30 KM/H	
									Rec./Flange Height	Alt./Flange Height	↓	
											bar	max load (kg)
16" 9.00 - 16	TT	16	-	IND	255	925	427	2740	6.50 H	6.00 G	7.25	2300

IND: Industrial



CON TRAILER

CON TRAILER is a trailer tire particularly suitable for port applications. It is the ideal tire for on-and-off-the-road applications. Its robust construction results in high load capacity, whereas its extra-deep tread allows for a better mileage.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)			
									Rec./Flange Height	Alt./Flange Height	↓			
											bar	9.10	8.40	
20" 10.00 - 20	TT	18	-	POR IND	286	1080	-	-	7.5	7.0; 8.0	3535	-	3135	
											40 LS	3535	-	
											40 LD	-	3135	

POR IND: Port Industrial



MAIN APPLICATION:
TRAILER



FLOTATION TR 675

FLOTATION TR 675 is best suited for soil tillage operations and transport. It fits trailers, compact dumpers and implement machinery. FLOTATION TR 675 has been engineered to provide outstanding traction remaining gentle on the ground to prevent crop damages.



SIZE	Type	PR	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)																	
											Rec./Flange Height	Alt./Flange Height	↓																	
22.5" 500/60 - 22.5	TL	12	-	157 A8/154 B	145 A8/142 B	STD	500	1181	534	3505	AG 16.00	15.00; 17.00	bar	1.50	2.00	2.40														
													km/h	10 FR	4390	5195	5775													
													20 FR	3950	4675	5200														
													30 FR	3510	4155	4620														
													40 FR	3135	3710	4125														
													50 FR	2820	3340	3750														
													10 DW	3085	3645	4060														
													20 DW	2780	3280	3655														
													30 DW	2470	2920	3250														
													40 DW	2205	2605	2900														
													50 DW	1985	2345	2650														
													500/60 - 22.5	TL	16	-	163 A8/159 B	151 A8/ 148 B	STD	500	1181	534	3505	AG 16.00	15.00; 17.00	bar	2.80	3.00	3.20	
																										km/h	10 FR	6315	6575	6825
																										20 FR	5685	5915	6145	
30 FR	5050	5260	5460																											
40 FR	4510	4695	4875																											
50 FR	4060	4225	4375																											
10 DW	4465	4650	4830																											
20 DW	4020	4185	4345																											
30 DW	3575	3720	3865																											
40 DW	3190	3320	3450																											
50 DW	2870	2990	3150																											
500/60 - 22.5	TL	20	-	168 A8/164 B	155 A8/151 B	DB	500	1181	534	3505	AG 16.00	15.00; 17.00														bar	3.70	3.80	4.00	
																										km/h	10 FR	7425	7545	7840
																										20 FR	6685	6790	7055	
													30 FR	5940	6035	6270														
													40 FR	5305	5390	5600														
													50 FR	4775	4850	5000														
													10 DW	5255	5340	5425														
													20 DW	4730	4805	4885														
													30 DW	4205	4275	4340														
													40 DW	3755	3815	3875														
													50 DW	3380	3435	3450														
													550/45 - 22.5	TL	20	-	166 A8/162 B	154 A8/150 B	STD	543	1070	-	-	AG 16.00	-	bar	3.00	3.50	4.00	
																										km/h	10 FR	6270	6860	7420
																										20 FR	5645	6175	6680	
30 FR	5020	5490	5935																											
40 FR	4480	4900	5300																											
50 FR	4030	4410	4750																											
10 DW	4440	4860	5250																											
20 DW	3995	4370	4725																											
30 DW	3550	3885	4200																											
40 DW	3170	3470	3750																											
50 DW	2855	3125	3350																											

STD: Standard
DB: Dual Belted



MAIN APPLICATION:
TRAILER



FLOTATION TR 675

FLOTATION TR 675 is best suited for soil tillage operations and transport. It fits trailers, compact dumpers and implement machinery. FLOTATION TR 675 has been engineered to provide outstanding traction remaining gentle on the ground to prevent crop damages.



SIZE	Type	PR	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)			
											Rec./Flange Height	Alt./Flange Height	↓			
													bar	1.50	1.80	2.10
22.5" 550/60 - 22.5	TL	12	-	160 A8/156 B	148 A8/144 B	STD	550	1260	547	3640	AG 16.00	-	10 FR	5175	5755	6300
													20 FR	4655	5180	5670
													30 FR	4140	4605	5040
													40 FR	3695	4110	4500
													50 FR	3325	3700	4000
													10 DW	3620	4030	4410
													20 DW	3255	3630	3970
													30 DW	2895	3225	3530
													40 DW	2585	2880	3150
													50 DW	2325	2590	2800
550/60 - 22.5	TL	16	-	167 A8/163 B	154 A8/150 B	STD	550	1260	547	3640	AG 16.00	-	10 FR	6970	7310	7630
													20 FR	6275	6575	6865
													30 FR	5580	5845	6105
													40 FR	4980	5220	5450
													50 FR	4480	4700	4875
													10 DW	4795	5025	5250
													20 DW	4315	4525	4725
													30 DW	3835	4020	4200
													40 DW	3425	3590	3750
													50 DW	3085	3230	3350

STD: Standard



MAIN APPLICATION:
TRAILER



INDUSTRIAL RIB F3

INDUSTRIAL RIB F3 is an agro-industrial rib-pattern tire designed for field and road transport as well as for soil tillage operations with implement machinery and trailers. This tire features outstanding cut and chip resistance making it suitable for the most critical operating conditions and ensuring a long tire life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)		
					Rec./Flange Height	Alt./Flange Height	↓						
15"	11L - 15 SL	TL	10	-	STD	279	813	-	-	8 LB	10 LB	bar	3.60
												km/h	
												30	1185
	11L - 15 SL	TL	12	-	STD	279	813	-	-	8 LB	10 LB	bar	4.20
												km/h	
												30	1290
16"	11L - 16 SL	TL	10	-	STD	279	830	-	-	W 8 L	8 LB; 10 LB; W 10 L	bar	3.60
												km/h	
												30	1250
	11L - 16 SL	TL	10	-	SPL	279	830	-	-	W 8 L	8 LB; 10 LB; W 10 L	bar	3.60
												km/h	
												30	1250
	11L - 16 SL	TL	12	-	STD	279	830	-	-	W 8 L	8 LB; 10 LB; W 10 L	bar	4.40
												km/h	
												30	1385
												40	1250

STD: Standard
SPL: Special



**MAIN APPLICATION:
TRAILER**



MT 612

MT 612 has been specially designed for multipurpose use on and off the road. Its strong casing allows carrying heavy loads at high speed whereas its broad lugs provide outstanding traction. The extra tread width ensures excellent flotation on sand and mud.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)		
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	bar	kg	
20" 14.00 - 20	TT	18	-	STD	390	1265	594	3827	10	-	bar	6.60	
											km/h	80 LS	4500
											80 LD	4000	
											bar	7.60	
14.00 - 20	TT	20	-	STD	390	1265	594	3827	10	-	bar	7.60	
											km/h	80 LS	4875
											80 LD	4375	
											bar	8.60	
14.00 - 20	TT	22	-	STD	390	1265	594	3827	10	-	bar	8.60	
											km/h	80 LS	5300
											80 LD	4750	
											bar	4.50	
16.0/70 - 20	TT	16	-	STD	408	1100	520	3327	13.00 T	-	bar	4.50	
											km/h	80 LS	3075
											80 LD	2725	
											bar	4.50	

STD: Standard



MULTI RIB (F-3)

MULTI RIB is an agro-industrial tire for soil tillage and transport applications with 2WD tractors, trailers, and implement machinery. It offers excellent handling throughout its long product life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY 40 KM/H	
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
16" 11.00 - 16	TL	12	-	STD	315	930	-	-	W10 L	W 8; W 8 L	bar	1550
				AB HD							4.10	1550
11.00 - 16	TL	12	-	AB HD	315	930	-	-	W10 L	W 8; W 8 L	4.10	1550

STD: Standard

AB HD: Aramid Belted Heavy Duty



**MAIN APPLICATION:
TRAILER**



RIB F3

RIB F3 is a field-oriented tire designed for 2WD tractors in soil tillage operations. Some sizes are suitable for transport applications using implement machinery and trailers. The RIB F3 tire is the ideal partner for all operations that require a high level of handling. It also ensures significant fuel savings to improve your business productivity.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
									Rec./Flange Height	Alt./Flange Height		
16" 9.00 - 16	TT	12	120 A6/ 112 A8	STD	245	878	387	2573	W 8	6.00 F; W 7; W 8 L	bar	
											km/h	4.70
											30	1400
											40	1120
9.00 - 16	TT	12	120 A6/ 112 A8	HD	245	878	387	2573	W 8	6.00 F; W 7; W 8 L	bar	
											km/h	4.70
											30	1400
											40	1120

STD: Standard
HD: Heavy Duty



SAND KING

SAND KING is a block pattern tire specially designed for trailers in transport applications. It provides excellent traction on sandy surfaces and best ground contact.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 65 KM/H LS	
									Rec./Flange Height	Alt./Flange Height		
16" 7.50 - 16	TT	8	-	STD	215	820	378	2471	5.50 F SDC	6.00 G	bar	max load (kg)
											4.15	1090
7.50 - 16	TT	12	-	STD	215	820	378	2471	5.50 F SDC	6.00 G	6.20	1360

STD: Standard



MAIN APPLICATION:
TRAILER



SAND MASTER

SAND MASTER is a block pattern tire specially designed for trailers. It provides excellent traction on sandy surfaces and best ground contact.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 65 KM/H LS	
									Rec./Flange Height	Alt./Flange Height	↓	
									bar	max load (kg)	bar	max load (kg)
16" 7.50 - 16	TT	8	-	STD	215	820	-	-	5.50 F SDC	6.00 G	4.15	1090
7.50 - 16	TT	12	-	STD	215	820	-	-	5.50 F SDC	6.00 G	6.20	1360
7.50 - 16	TT	16	-	STD	215	820	-	-	5.50 F SDC	6.00 G	7.60	1550

STD: Standard



SAND STAR

SAND STAR is a block pattern tire specially designed for trailers. It provides excellent traction on sandy surfaces and best ground contact. It also reduces soil compaction.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
									Rec./Flange Height	Alt./Flange Height	↓	
									bar	max load (kg)	bar	max load (kg)
13" 9.00 - 13	TT	6	108 D	STD	245	784	-	-	5.50 F	5.50 WB	3.10	1000
9.00 - 13	TL	6	108 D	STD	245	784	-	-	5.50 F	5.50 WB	3.10	1000
9.00 - 13	TT	8	116 A8	STD	245	784	-	-	5.50 F	5.50 WB	2.75	1250
9.00 - 13	TL	8	116 A8	STD	245	784	-	-	5.50 F	5.50 WB	2.75	1250
9.00 - 13	TT	10	119 A8	STD	245	784	-	-	5.50 F	5.50 WB	3.25	1360
9.00 - 13	TL	10	119 A8	STD	245	784	-	-	5.50 F	5.50 WB	3.25	1360

STD: Standard



MAIN APPLICATION:
TRAILER



ST 180 (speed category: 100 km/h)

ST 180 is a road-oriented tire developed for soil tillage and transport applications with trailers and implement machinery. Its specific tread pattern ensures a long tire life-cycle due to reduced wear and contributes to significant fuel savings.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 100 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
8" 4.80 - 8	TL	6	-	STD	121	418	-	-	3.75 - I - 55	3.75 - I - 70	6.20	345
5.70 - 8	TL	6	-	STD	142	475	-	-	4.50 - I - 55	I - 70; I - 90; 3.75	5.20	412
5.70 - 8	TL	8	-	STD	142	475	-	-	4.50 - I - 55	I - 70; I - 90; 3.75	6.90	487
9" 6.00 - 9	TT/TL	8	-	STD	165	540	-	-	4.00 - I - 55	4.50 - I - 55; I - 70; I - 90	5.90	630
6.00 - 9	TL	10	-	STD	165	540	-	-	4.00 - I - 55	4.50 - I - 55; I - 70; I - 90	6.90	690
6.00 - 9	TT/TL	12	-	STD	165	540	-	-	4.00 - I - 55	4.50 - I - 55; I - 70; I - 90	7.90	830
10" 5.00 - 10	TL	6	-	STD	142	530	-	-	3.5	-	3.00	390

STD: Standard



MAIN APPLICATION:
TRAILER



ST 180 (speed category: 40 km/h)

ST 180 is a road-oriented tire developed for soil tillage and transport applications with trailers and implement machinery. Its specific tread pattern ensures a long tire life-cycle due to reduced wear and contributes to significant fuel savings.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 40 KM/H	
									Rec./Flange Height	Alt./Flange Height		
											bar	max load (kg)
13" ST 165/80 D 13 (A 78 - 13)	TL	4	-	STD	156	597	272	1746	4½ J	4½ J; 5½ J; 6 J	2.50	450
ST 175/80 D 13 (B 78 - 13)	TL	4	-	STD	175	620	286	1845	5 J	4½ J; 5½ J; 6 J	2.50	500
ST 175/80 D 13 (B 78 - 13)	TL	6	-	STD	175	620	286	1845	5 J	4½ J; 5½ J; 6 J	3.50	615
ST 175/80 D 13 (B 78 - 13)	TL	8	-	STD	175	620	286	1845	5 J	4½ J; 5½ J; 6 J	4.50	710
14" ST 195/75 D 14 (E 78 - 14)	TL	4	-	STD	192	668	312	2013	5 J	5½ J; 6 J; 6½ J	2.50	600
ST 195/75 D 14 (E 78 - 14)	TL	6	-	STD	192	668	312	2013	5 J	5½ J; 6 J; 6½ J	3.50	730
ST 195/75 D 14 (E 78 - 14)	TL	8	-	STD	192	668	312	2013	5 J	5½ J; 6 J; 6½ J	4.50	850
ST 205/65 D 14 (F 65 - 14)	TL	6	-	STD	190	621	292	1875	5 J	5½ J	3.50	800
ST 205/75 D 14 (E 78 - 14)	TL	4	-	STD	200	682	317	2049	6 J	5 J; 5½ J; 6 J	2.50	650
ST 205/75 D 14 (E 78 - 14)	TL	6	-	STD	200	682	317	2049	6 J	5 J; 5½ J; 6 J	3.50	800
ST 215/75 D 14 (G 78 - 14)	TL	6	-	STD	205	682	320	2073	6 J	5½ J; 6½ J; 7 J	3.50	850
15" ST 205/65 D 15 (F 65 - 15)	TL	6	-	STD	193	648	303	1935	6 J	5½ J; 6½ J	3.50	825
ST 205/75 D 15 (F 78 - 15)	TL	4	-	STD	195	702	327	2103	5½ J	5 J; 6 J; 7 J	2.50	670
ST 205/75 D 15 (F 78 - 15)	TL	6	-	STD	195	702	327	2103	5½ J	5 J; 6 J; 7 J	3.50	825
ST 225/75 D 15 (H 78 - 15)	TL	6	-	STD	217	730	337	2178	6 J	5½ J; 6½ J; 7 J	3.50	975
ST 225/75 D 15 (H 78 - 15)	TL	8	-	STD	217	730	337	2178	6 J	5½ J; 6½ J; 7 J	4.50	1150

STD: Standard



MAIN APPLICATION:
TRAILER



SUPER SAND

SUPER SAND is particularly suitable for trailers operating on sandy surfaces during hot weather conditions. It features high flotation capability and is ideal for all operations requiring a high level of handling.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)			
					Rec./Flange Height	Alt./Flange Height	↓							
15"	9.00 - 15	TT	6	-	STD	275	854	-	-	7.00	-	bar	2.40	
												km/h	65 LS	925
16"	9.00 - 16	TT	8	-	STD	255	885	-	-	6.50 H	6.00 G	bar	2.40	
												km/h	65 LS	975
20"	14.00 - 20	TT	12	-	STD	385	1225	-	-	10.00 V	10.00 W	bar	2.40	
												km/h	65 LS	2360
												65 LD	2060	
	14.00 - 20	TT	16	-	STD	385	1225	-	-	10.00 V	10.00 W	bar	4.85	
												km/h	65 LS	3540
												65 LD	3115	
	14.00 - 20	TT	18	-	STD	385	1225	-	-	10.00 V	10.00 W	bar	5.85	
												km/h	65 LS	3965
												65 LD	3490	
	16.00 - 20	TT	16	-	STD	415	1305	-	-	10.00 V	-	bar	2.40	
												km/h	50	3700

STD: Standard



**MAIN APPLICATION:
TRAILER**



TR 387

TR 387 is an agro-industrial tire suitable for trailers. It features outstanding flotation capability and is available in different versions to meet specific user requirements in terms of cut and chip resistance, heavy-duty services and durability. The "dual bead" version is particularly suitable for industrial tractors and transport operations on trailers.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 30 KM/H	
									Rec./Flange Height	Alt./Flange Height	↓	
									↓		bar	max load (kg)
28" 12.4 - 28	TL	8	-	STD	325	1200	550	3576	W 11	W 9; W 10	2.30	1550
16.9 - 28	TL	8	-	STD	440	1400	630	4074	DW 15 L	DW 14 L	1.70	2180
30" 16.9 - 30	TL	8	-	STD	440	1450	655	4220	DW 15 L	DW 14 L	1.70	2300
18.4 - 30	TL	8	-	STD	475	1530	680	4395	DW 16 L	DW 15 L	1.40	2430
18.4 - 30	TT	14	-	HD	475	1530	680	4395	DW 16 L	DW 15 L	2.60	3450
32" 24.5 - 32	TL	16	-	STD	625	1755	790	5226	DH 21	DH 21 B; DH 21 H; DH 21 HB	2.10	5000

STD: Standard
HD: Heavy Duty



**MAIN APPLICATION:
TRAILER**



TR 390

TR 390 is an agro-industrial tire suitable for trailers. TR 390 features outstanding flotation capability and increased durability. Its "dual bead HD" version is particularly suitable for industrial tractors and transport operations on trailers, whereas its "dual bead HD special" version is ideal for heavy-duty service.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 30 KM/H	
									Rec./Flange Height	Alt./Flange Height	↓	
											bar	max load (kg)
26" 23.1 - 26	TL	8	-	STD	587	1560	690	4545	DW 20 B	-	1.10	2900
23.1 - 26	TL	12	-	STD	587	1560	690	4545	DW 20 B	-	1.70	3650
23.1 - 26	TL	16	-	STD	587	1560	690	4545	DW 20 B	-	2.30	4375
23.1 - 26	TL	18	-	DB HD	587	1560	690	4545	DW 20 B	-	2.60	4625
23.1 - 26	TL	18	-	HD DB SPL	587	1560	690	4545	DW 20 B	-	2.60	4625
28L - 26	TL	12	-	STD	714	1560	690	4545	DW 25 B	DW 23 B	1.40	3750
28L - 26	TL	16	-	STD	714	1560	690	4545	DW 25 B	DW 23 B	1.90	4500
28L - 26	TL	20	-	DB HD	714	1560	690	4545	DW 25 B	DW 23 B	2.80	6300

STD: Standard
DB HD: Dual Bead Heavy Duty
HD DB SPL: Heavy Duty Dual Bead Special



**MAIN APPLICATION:
TRAILER**



TR 391

TR 391 is an agro-industrial tire suitable for transport and compacting operations with trailers and compactors. TR 391 features outstanding flotation capability to avoid soil damages.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 30 KM/H	
									Rec./Flange Height	Alt./Flange Height	↓	
									↓		bar	max load (kg)
24" 14.9 - 24	TL	6	-	STD	405	1255	563	3639	DW 13	DW 11; DW 13 L; DW 12	1.40	1550
14.9 - 24	TL	8	-	STD	405	1255	563	3639	DW 13	DW 11; DW 12; DW 13 L	1.80	1800

STD: Standard



TUF LUG

TUF LUG is suitable for trailers and light trucks in transport applications. This tire offers good traction and great durability and ensures a long product life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
									Rec./Flange Height	Alt./Flange Height	↓	
									↓		bar	
16" 7.50 - 16	TT	12	-	STD	216	830	-	-	6.00 G	5.50 F	bar	6.20
											km/h	
											100 LS	1400
7.50 - 16	TT	14	-	STD	216	830	-	-	6.00 G	5.50 F	bar	6.90
											km/h	
											100 LS	1500
7.50 - 16	TT	16	-	STD	216	830	-	-	6.00 G	5.50 F	bar	7.60
											km/h	
											100 LD	1400

STD: Standard



**MAIN APPLICATION:
UNIVERSAL MULTIPURPOSE VEHICLE**



EARTHMAX SR 33

Earthmax SR 33 is a radial tire for multipurpose trucks. Its multi-block tread pattern has been specially designed to guarantee extraordinary traction on soft, sandy, or muddy surfaces. Earthmax SR 33 provides outstanding stability in addition to best self-cleaning properties. The strong All Steel casing features excellent durability and resistance to snag and punctures.



SIZE	Type	Star rating	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 100 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
20" 395/85 R 20	TL	-	168J	STD	394	1184	538	3589	10.00W, 10.00HF	-	8.50	5600

STD: Standard



**MAIN APPLICATION:
UNIVERSAL MULTIPURPOSE VEHICLE**



MP 567

MP 567 is an agro-industrial tire suitable for field and road transport, municipality/maintenance operations as well as soil tillage applications depending on the tire size. The MP 567 tire provides good traction in all the weather conditions as well as excellent self-cleaning properties.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)		
									Rec./Flange Height	Alt./Flange Height			
15.3"	10.0/75 - 15.3	TL	10	-	STD	258	774	355	2310	9.0	-	bar	3.90
												km/h	1735
												30	1550
												40	
												bar	4.70
												km/h	1905
												30	1700
												40	
												bar	5.50
												km/h	2130
												30	1900
												40	
											bar	7.10	
											km/h	2440	
											30	2180	
											40		
											bar	3.40	
											km/h	2185	
											30	1950	
											40		
											bar	4.75	
											km/h	2720	
											30	2430	
											40		
											bar	6.00	
											km/h	3050	
											30	2725	
											40		
18"	10.5 - 18	TT	10	-	STD	270	905	415	2768	9	9 SDC	bar	3.75
												km/h	1700
												90	1955
												40	
												bar	3.75
												km/h	1700
												90	1955
												40	
												bar	4.50
												km/h	1900
												90	2190
												40	
											bar	3.00	
											km/h	1800	
											90	2070	
											40		
											bar	3.00	
											km/h	1800	
											90	2070	
											40		

STD: Standard



**MAIN APPLICATION:
UNIVERSAL MULTIPURPOSE VEHICLE**



MP 567

MP 567 is an agro-industrial tire suitable for field and road transport, municipality/maintenance operations as well as soil tillage applications depending on the tire size. The MP 567 tire provides good traction in all the weather conditions as well as excellent self-cleaning properties.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)		
					Rec./Flange Height	Alt./Flange Height	↓						
18"	12.5 - 18	TT	12	-	STD	325	990	450	2940	11	12 SDC	bar	3.50
												km/h	1950
												40	2245
	12.5 - 18	TL	12	-	STD	325	990	450	2940	11	12 SDC	bar	3.50
												km/h	1950
												40	2245
	12.5 - 18	TL	16	-	STD	325	990	450	2940	11	12 SDC	bar	4.50
												km/h	2250
												40	2585
19.5"	18 - 19.5	TL	14	-	STD	460	1104	498	3280	14.00	-	bar	4.75
												km/h	3925
												40	4150
	18 - 19.5	TL	16	-	STD	460	1104	498	3280	14.00	-	bar	6.00
												km/h	4500
												40	4700
	18 - 19.5	TL	18	-	STD	460	1104	498	3280	14.00	-	bar	7.25
												km/h	5150
												40	5460
20"	10.5 - 20	TT	10	-	STD	270	955	445	2880	9	9 SDC	bar	3.75
												km/h	1800
												40	2070
	10.5 - 20	TL	10	-	STD	270	955	445	2880	9	9 SDC	bar	3.75
												km/h	1800
												40	2070
	12.5 - 20	TT	10	-	STD	325	1040	475	3090	11.0	12 SDC	bar	3.00
												km/h	1850
												40	2130
	12.5 - 20	TL	10	-	STD	325	1040	475	3090	11.0	12 SDC	bar	3.00
												km/h	1850
												40	2130
	12.5 - 20	TT	12	-	STD	325	1040	475	3090	11.0	12 SDC	bar	3.50
												km/h	2000
												40	2300
	12.5 - 20	TL	12	-	STD	325	1040	475	3090	11.0	12 SDC	bar	3.50
												km/h	2000
												40	2300

STD: Standard



**MAIN APPLICATION:
UNIVERSAL MULTIPURPOSE VEHICLE**



MP 567

MP 567 is an agro-industrial tire suitable for field and road transport, municipality/maintenance operations as well as soil tillage applications depending on the tire size. The MP 567 tire provides good traction in all the weather conditions as well as excellent self-cleaning properties.



AGRO-INDUSTRIAL
USE

TRACTION

ALL SEASON

SELF-CLEANING

20"

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
									Rec./Flange Height	Alt./Flange Height		
14.5 - 20	TL	10	-	STD	360	1116	495	3315	11	12 SDC	bar	2.50
											km/h	2000
											90	2300
14.5 - 20	TL	12	-	STD	360	1116	495	3315	11	12 SDC	bar	3.00
											km/h	2240
											90	2580
14.5 - 20	TL	14	-	STD	360	1116	495	3315	11	12 SDC	bar	3.50
											km/h	2430
											90	2790
14.5 - 20	TL	16	-	STD	360	1116	495	3315	11	12 SDC	bar	4.00
											km/h	2575
											90	2960
14.5 - 20	TL	18	-	STD	360	1116	495	3315	11	12 SDC	bar	4.50
											km/h	2725
											90	3135
16.0/70 - 20 (405/70 - 20)	TL	14	-	STD	405	1128	490	3350	13 SDC	12	bar	3.50
											km/h	2900
											90	3340
16.0/70 - 20 (405/70 - 20)	TT	14	-	STD	405	1128	490	3350	13 SDC	12	bar	3.50
											km/h	2900
											90	3340

STD: Standard



**MAIN APPLICATION:
UNIVERSAL MULTIPURPOSE VEHICLE**



MP 585

MP 585 is a road-oriented and agro-industrial tire, which is suitable for multi-purpose vehicles in municipality/maintenance applications. This tire is specially engineered with a tread pattern that offers maximum stability in the most difficult working conditions.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
					Rec./Flange Height	Alt./Flange Height						
20" 6.50 - 20	TT	10	106 A6	STD	200	875	-	-	5.50 F	4.00 E; 5.00 F	bar	
											km/h	5.50
											30	950
10.5 - 20	TL	10	-	STD	273	970	455	2890	9	9 SDC	bar	
											km/h	3.75
											90	1800
12.5 - 20	TL	12	-	STD	335	1050	480	3130	11	12 SDC	bar	
											km/h	3.50
											90	2000
											50	2240

STD: Standard



**MAIN APPLICATION:
UNIVERSAL MULTIPURPOSE VEHICLE**



MULTIMAX MP 513

MULTIMAX MP 513 has been designed by BKT for multi-purpose vehicles in municipality/maintenance applications. Thanks to the strong steel-belted nylon casing, MULTIMAX MP 513 allows to carry heavy loads at high speeds. Its reinforced bead ensures a longer service life and extra mileage to enhance productivity.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)													
									Rec./Flange Height	Alt./Flange Height	↓													
17"	425/55 R 17	TL	-	134 G	STD	421	900	399	2645	13	13.00	bar												
												km/h							1.6	2.0	2.5	3.0	3.5	
												90	1080	1280	1550	1830	2120							
												65	1175	1390	1685	1990	2305							
												40	1245	1475	1785	2105	2440							
18"	365/70 R 18	TL	-	133 G	STD	360	969	448	2933	11	11 SDC; 12; 12 SDC	bar												
												km/h							1.6	2.0	2.5	3.0	3.5	3.75
												90	1080	1280	1520	1760	2000	2060						
												65	1170	1380	1650	1910	2170	2240						
												40	1250	1470	1750	2020	2300	2370						
20"	375/70 R 20	TL	-	136 G	STD	377	1034	472	3121	12	W 10; DW 10; 11; 11 SDC; W 11; DW 11; 12 SDC	bar												
												km/h							1.6	2.0	2.5	3.0	3.5	
												90	1210	1435	1705	1975	2240							
												65	1315	1560	1855	2145	2435							
												40	1395	1655	1965	2275	2580							
20"	405/70 R 20	TL	-	136 G	STD	407	1076	493	3253	13	13 SDC; 12 SDC	bar												
												km/h							1.6	2.0	2.5	3.0	3.5	
												90	1340	1580	1820	2040	2240							
												65	1455	1715	1975	2215	2435							
												40	1545	1820	2095	2350	2580							
20"	425/75 R 20	TL	-	148 G	STD	421	1146	521	3479	13	13 SDC; 11 SDC; 12 SDC; 11; 12	bar												
												km/h							1.6	2.0	2.5	3.0	3.5	4.0
												90	1540	1810	2150	2490	2820	3150						
												65	1675	1965	2335	2705	3060	3420						
												40	1775	2085	2475	2865	3245	3625						
24"	495/70 R 24	TL	-	155 G	STD	499	1304	588	3974	W 16 L	DW 15 L; DW 16 L; W 15 L	bar												
												km/h							1.6	2.0	2.5	3.0	3.5	
												90	1980	2340	2840	3250	3875							
												65	2150	2540	3085	3530	4205							
												40	2280	2695	3270	3740	4460							

STD: Standard



MAIN APPLICATION:
UNIVERSAL MULTIPURPOSE VEHICLE



MULTIMAX MP 540

MULTIMAX MP 540 has been designed by BKT for multi-purpose vehicles in municipality/maintenance applications. Thanks to the strong steel-belted nylon casing, MULTIMAX MP 540 allows to carry heavy loads at high speeds.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)							
									Rec./Flange Height	Alt./Flange Height	↓							
											bar	4.0	4.5	5.0	5.5	6.0	6.5	
20"												110	2205	2420	2635	2845	3050	3250
												100	2205	2420	2635	2845	3050	3250
												90	2250	2470	2685	2900	3110	3315
												80	2290	2520	2740	2955	3170	3380
												70	2360	2595	2820	3045	3265	3480

STD: Standard



MAIN APPLICATION:
MOBILE CRANE



AIROMAX AM 27


RADIAL CRANE TIRES

AIROMAX AM 27 is the ideal road-oriented tire for construction applications with cranes. It features extraordinary heat resistance and outstanding riding comfort. AIROMAX AM 27 is a high-speed tire particularly suitable for all operations requiring a high level of handling.



SIZE	Type	Star rating	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
									Rec./Flange Height	Alt./Flange Height		
24" 385/95 R 24 (14.00 R 24)	TT	-	170 F	STD	372	1363	626	4175	10.00/1.5	-	bar	
											km/h	9
25" 385/95 R 25 (14.00 R 25)	TL	-	170 F	STD	372	1363	626	4175	10.00/1.5	-	bar	
											km/h	9
445/95 R 25 (16.00 R 25)	TL	-	174 F	STD	440	1490	725	4490	11.25/2.0	11.00/1.7 CR; 11.00/1.7CRL	bar	
											km/h	9
											30	8500
											40	7750
											50	7500
											60	7300
											70	7100
											80	6700
90	6300											
100	5600											
505/95 R 25 (18.00 R 25)	TL	-	186 E	STD	492	1600	728	4900	13.00/2.5	-	bar	
											km/h	9
											30	12350
											40	11800
											50	11200
											60	10650
											70	9500
											80	7800
90	6650											
100	5700											

STD: Standard



MAIN APPLICATION:
MOBILE CRANE



AIROMAX AM 543

RADIAL CRANE TIRES

AIROMAX AM 543 is the ideal tire for construction applications with cranes. It shows outstanding traction and high stability. As crane tires are subject to particular stress and extreme usage conditions, AIROMAX AM 543 has been designed for providing excellent heat resistance. Besides, it is suitable for all operations requiring a high level of handling.



TRACTION



HIGH SPEED



HANDLING




HEAT RESISTANCE



COMFORT

SIZE	Type	Star rating	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
					Rec./Flange Height	Alt./Flange Height	↓					
25" 445/95 R 25 (16.00 R 25)	TL	-	177 E	STD	435	1480	720	4459	11.25/2.0	11.00/1.7 CR; 11.00/1.7CRL	bar	9
											km/h	
											30	9500
											40	9000
											50	8500
											60	8250
											70	7300
											80	6000
											90	5150
											100	4375

STD: Standard



MAIN APPLICATION:
MOBILE CRANE



CRANE SPECIAL (E-3)

CRANE SPECIAL is suitable for pick & carry cranes on rough terrains. The tire is made of a special compound which provides high stability and durability.



HIGH SPEED



STABILITY



SPECIAL
COMPOUND

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 50 KM/H	
									Rec./Flange Height	Alt./Flange Height		
											bar	max load (kg)
24" 14.00 - 24	TT/TL	24	-	STD	375	1368	628	4050	10.00 W	-	5.75	5150
25" 16.00 - 25	TT/TL	28	-	STD	463	1485	682	4395	11.25/2.0	-	5.75	6700
18.00 - 25	TL	32	-	STD	510	1615	739	4780	13.00/2.5	15.00/2.5	5.75	8750

STD: Standard

PORT TIRES





MAIN APPLICATION:
RTG CRANE




XL GRIP (IND-3)

XL GRIP (IND-3) is a bias-ply tire for RTG cranes. The tire features a strong casing made of a specially formulated tread compound in addition to optimized tie bars and tread grooves, which provide a wide contact area on the ground as well as exceptional stability in lift mode.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)	
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height		
25"	16.00 - 25	TL	32	-	IND	465	1485	682	4395	11.25/2.0	13.00/2.0	10.30 16875
	18.00 - 25	TL	32	-	IND	510	1615	739	4780	13.00/2.5	15.00/2.5	9.00 20250 18750
	18.00 - 25	TL	40	-	IND	510	1615	739	4780	13.00/2.5	15.00/2.5	10.30 22950
	21.00 - 25	TL	32	-	IND	576	1750	789	5185	15.00/3.0	17.00/3.0	7.80 24000
	21.00 - 25	TL	36	-	IND	576	1750	789	5185	15.00/3.0	17.00/3.0	8.70 25650
	21.00 - 25	TL	40	-	IND	576	1750	789	5185	15.00/3.0	17.00/3.0	9.90 27810
	24.00 - 29	TL	42	-	IND	656	1994	900	5860	17.00/3.5	-	9.00 36260 33575
35"	21.00 - 35	TL	36	-	IND	580	2020	928	5980	15.00/3.0	-	9.00 31000
	21.00 - 35	TL	40	-	IND	580	2020	928	5980	15.00/3.0	-	9.90 32800
	24.00 - 35	TL	48	-	IND	655	2130	975	6302	17.00/3.5	-	10.30 42525

IND: Industrial



MAIN APPLICATION:
CONTAINER HANDLER



ROCK GRIP (IND 4)

ROCK GRIP PORT INDUSTRIAL (IND-4) is a bias-ply tire designed for port container handling equipment. The special ROCK GRIP compounds are well-suited for fast-paced shipping environments where heat and cut resistance is a must.



DEEP TREAD



HEAVY DUTY SERVICE



STABILITY



DURABILITY




PAVED SURFACE



CUT & CHIP RESISTANCE

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 10 KM/H		
									Rec./Flange Height	Alt./Flange Height			
											bar	max load (kg)	
25"	16.00 - 25	TL	32	-	POR IND	470	1525	699	4514	11.25/2.0	13.00/2.0	10.30	16875
	18.00 - 25	TL	40	-	IND	510	1650	753	4885	13.00/2.5	15.00/2.5	10.30	22950
33"	18.00 - 33	TL	36	-	IND	510	1887	869	5586	13.00/2.5	-	10.30	24975
	18.00 - 33	TL	40	-	IND	510	1887	869	5586	13.00/2.5	-	10.30	27000
	18.00 - 33	TL	44	-	IND	510	1887	869	5586	13.00/2.5	-	10.30	27810

IND: Industrial
POR IND: Port Industrial



**MAIN APPLICATION:
CONTAINER HANDLER**



SM 54 (L-4S)

SM 54 (L-4S) has been specially designed for empty container handlers and reach stackers in intermodal/logistics applications. It features high stability in lift mode as well as a deep and smooth tread design, providing excellent cut resistance to ensure an extended tire life-cycle.



CUT & CHIP RESISTANCE



DURABILITY



STABILITY




HEAVY DUTY SERVICE



PAVED SURFACE

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 10 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
25" 16.00 - 25	TL	28	-	IND	430	1470	676	4354	11.25/2.0	13.00/2.0	9.00	15525
16.00 - 25	TL	32	-	IND	430	1470	676	4354	11.25/2.0	13.00/2.0	10.30	16875
18.00 - 25	TL	40	-	IND	528	1650	750	4880	13.00/2.5	15.00/2.5	10.30	22950
33" 18.00 - 33	TL	36	-	IND	535	1895	840	5609	13.00/2.5	-	10.30	24975
18.00 - 33	TL	36	-	POR IND	535	1895	840	5609	13.00/2.5	-	10.30	24975
18.00 - 33	TL	40	-	IND	535	1895	840	5609	13.00/2.5	-	10.30	26655
18.00 - 33	TL	40	-	POR IND	535	1895	840	5609	13.00/2.5	-	10.30	26655

IND: Industrial
POR IND: Port Industrial



MAIN APPLICATION:
CONTAINER HANDLER



SM 55 (L-5S) (IND-5)

SM 55 (L-5S) (IND-5) has been specially designed for reach stackers and container handlers. Its special abrasion-resistant tread compound provides an extended tire life on asphalt or concrete surfaces and offers excellent stability to vehicles in lift mode.



EXTRA DEEP TREAD



HEAVY DUTY SERVICE



STABILITY



DURABILITY




PAVED SURFACE



CUT & CHIP RESISTANCE

SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 10 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
25" 18.00 - 25	TL	40	-	PS	517	1665	765	5118	13.00/2.5	15.00/2.5	10.30	22950
18.00 - 25	TL	40	-	GCR	517	1665	765	5118	13.00/2.5	15.00/2.5	10.30	22950

PS: Port Special
GCR: Groove Crack Resistant



**MAIN APPLICATION:
EMPTY CONTAINER HANDLER**




POWER TRAX HD

POWER TRAX HD premium tire is specially designed for equipment in port and underground mining applications. Its deep tread, the extra thick sidewall and the tough casing provide exceptional durability minimizing the risk of punctures and accidental damages. The tire features excellent cut and chip resistance, which is particularly suitable for rough and hard surfaces. The specially designed rim guard ensures protection against flats and wheel damage in the rim flange area.



SIZE	Type	PR	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		LOAD CAPACITY (KG/TIRE)	
					(mm)	(mm)	(mm)	(mm)	Rec./Flange Height	Alt./Flange Height	↓	
20" 12.00 - 20	TT	20	-	STD	320	1150	-	-	8.50	9.0	bar	
											km/h	10.00
											25 LOAD WHEEL	9230
											25 STEER WHEEL	7100
											10 OTHER VEHICLES	9230
											25 OTHER VEHICLES	7100
											STATIC SIDE LOADER	10720
12.00 - 20	TT	20	-	SPL	320	1150	-	-	8.50	9.0	bar	
											km/h	10.00
											25 LOAD WHEEL	9230
											25 STEER WHEEL	7100
											10 OTHER VEHICLES	9230
											25 OTHER VEHICLES	7100
											STATIC SIDE LOADER	10720
12.00 - 20	TT	28	-	STD	320	1150	-	-	8.50	9.0	bar	
											km/h	10.30
											25 LOAD WHEEL	9490
											25 STEER WHEEL	7300
											10 OTHER VEHICLES	9490
											25 OTHER VEHICLES	7300
											STATIC SIDE LOADER	11025

STD: Standard
SPL: Special



**MAIN APPLICATION:
EMPTY CONTAINER HANDLER**




POWER TRAX HD SMOOTH

POWER TRAX HD SMOOTH is a bias-ply tire specially designed for port and underground mining operations. The special sidewall protection along with a solid tread prevents cut and puncture damages that are common in such demanding environments. When you need to move heavy-duty loads, Power Trax HD Smooth is your ideal partner.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
					Rec./Flange Height	Alt./Flange Height	↓					
20" 12.00 - 20	TT	20	-	STD	320	1150	-	-	8.50	9.0	bar	10.00
											km/h	
											25 LOAD WHEEL	9230
											25 STEER WHEEL	7100
											10 OTHER VEHICLES	9230
											25 OTHER VEHICLES	7100
											STATIC SIDE LOADER	10720

STD: Standard



**MAIN APPLICATION:
EMPTY CONTAINER HANDLER**



EM 937 (E-3) IND


EM 937 (E-3) IND is specially designed for empty-container-handling operations in stacking and loading applications. It features excellent durability and a long tire life. EM 937 (E-3) IND is ideal on paved surfaces and for all operations requiring a high level of handling in the port.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 10 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
14.00 - 24	TT	28	-	IND	375	1368	628	4050	10.00 W	-	10.30	13500
14.00 - 24	TL	28	-	IND	375	1368	628	4050	10.00 W	-	10.30	13500

24"

IND: Industrial



**MAIN APPLICATION:
EMPTY CONTAINER HANDLER**




ROCK GRIP (IND-4)

ROCK GRIP PORT INDUSTRIAL (IND-4) is a bias-ply tire designed for port container handling equipment. The special ROCK GRIP compounds are well-suited for fast-paced shipping environments where heat and cut resistance is a must.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 10 KM/H	
									Rec./Flange Height	Alt./Flange Height	↓	
											bar	max load (kg)
24" 12.00 - 24	TT	20	-	IND	315	1265	595	3755	8.5	8.0	9.90	9135
12.00 - 24	TT	24	-	IND	315	1265	595	3755	8.5	8.0	10.20	10270
14.00 - 24	TL	24	-	IND	375	1410	647	4173	10.00 W	9.0; 9.00 V; 10.00	10.20	12825
14.00 - 24	TL	28	-	IND	375	1410	647	4173	10.00 W	9.0; 9.00 V; 10.00	10.20	13500
14.00 - 24	TL	28	-	IND	375	1410	647	4173	10.00 WA	-	10.20	13500
14.00 - 24	TL	32	-	IND	375	1410	647	4173	10.00 W	9.0; 9.00 V; 10.00	10.20	14175

IND: Industrial



**MAIN APPLICATION:
EMPTY CONTAINER HANDLER**



XL GRIP (IND-3)

XL GRIP (IND-3) is a bias-ply tire for empty container handlers. The tire features a strong casing made of a specially formulated tread compound in addition to optimized tie bars and tread grooves, which provide a wide contact area on the ground as well as high stability in lift mode.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY (KG/TIRE)	
									Rec./Flange Height	Alt./Flange Height		
24" 12.00 - 24	TT	24	-	IND	320	1250	585	3710	8.5	8.0	↓	
											bar	10.20
											km/h 10	10270
25" 16.00 - 25	TL	28	-	IND	465	1485	682	4395	11.25/2.0	13.00/2.0	↓	
											bar	9.00
											km/h 10	15525

IND: Industrial



**MAIN APPLICATION:
REACH STACKER**



CONTAINER KING (IND-4)

CONTAINER KING (IND-4) has been specially designed for reach stackers in port handling applications. It is made of a highly wear-and-tear-resistant tread compound which minimizes tread cracks and ensures an extended tire life-cycle. Additionally, CONTAINER KING has exceptional stability in lift mode.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 10 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
25" 18.00 - 25	TL	40	-	GCR	528	1675	765	4955	13.00/2.5	15.00/2.5	10.30	22950
18.00 - 25	TL	40	-	IND	528	1675	765	4955	13.00/2.5	15.00/2.5	10.30	22950

IND: Industrial
GCR: Groove Crack Resistant



PORT KING PLUS

PORT KING PLUS has been specially designed for reach stackers in intermodal/logistics applications. Its deep tread with sturdy lugs along with the special compound provides an extended tire life-cycle. It is also available with a Groove Crack Resistant tread Compound (GCRC).



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 10 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
25" 18.00 - 25	TL	40	-	GCR	528	1675	765	4955	13.00/2.5	15.00/2.5	10.30	22950
18.00 - 25	TL	40	-	IND	528	1675	765	4955	13.00/2.5	15.00/2.5	10.30	22950

IND: Industrial
GCR: Groove Crack Resistant



MAIN APPLICATION:
REACH STACKER



PORT KING CLASSIC (IND-4)

Port King Classic is BKT's latest-generation port tire, which has been specially engineered for container handling equipment. The tire ensures maximum operating efficiency and exceptional stability in lift mode. Thanks to its strong nylon casing, Port King Classic stands out for higher load capacity minimizing the risk of impact breaks, snags, and punctures. The new wear-resistant compound has been developed to ensure an extended product life-cycle, and to provide the best return on investment.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 10 KM/H	
									Rec./Flange Height	Alt./Flange Height	↓	
									bar	max load (kg)		
25" 18.00 - 25	TL	40	-	IND	528	1675	765	4955	13.00/2.5	15.00/2.5	10.30	22950

IND: Industrial



PORTMAX PM 90

PORTMAX PM 90 has been specially designed for reach stackers. It is an All Steel radial tire with multilayer steel belts. Its special tread compound ensures an extended tire life-cycle. PORTMAX PM 90 offers reduced rolling resistance improving fuel economy.



SIZE	Type	Star rating	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 25 KM/H	
									Rec./Flange Height	Alt./Flange Height	↓	
									bar	max load (kg)		
25" 18.00 R 25	TL	***	214 A5	IND	495	1655	730	5024	13.00/2.50	-	10	21200

IND: Industrial



**MAIN APPLICATION:
REACH STACKER**



SM 54 (L-4S)

SM 54 (L-4S) has been specially designed for empty container handlers and reach stackers in intermodal/logistics applications. It features high stability in lift mode as well as a deep and smooth tread design, providing excellent cut resistance to ensure an extended tire life-cycle.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 10 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
25" 18.00 - 25	TL	40	-	IND	528	1650	750	4880	13.00/2.5	15.00/2.5	10.30	22950
33" 18.00 - 33	TL	36	-	IND	535	1895	840	5609	13.00/2.5	-	10.30	24975
18.00 - 33	TL	36	-	POR IND	535	1895	840	5609	13.00/2.5	-	10.30	24975
18.00 - 33	TL	40	-	IND	535	1895	840	5609	13.00/2.5	-	10.30	26655
18.00 - 33	TL	40	-	POR IND	535	1895	840	5609	13.00/2.5	-	10.30	26655

IND: Industrial
POR IND: Port Industrial



MAIN APPLICATION:
REACH STACKER



SM 55 (L-5S) (IND-5)

SM 55 (L-5S) (IND-5) has been specially designed for reach stackers and container handlers. Its special abrasion-resistant tread compound provides an extended tire life on asphalt or concrete surfaces and offers excellent stability to vehicles in lift mode.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 10 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
25" 18.00 - 25	TL	40	-	PS	517	1665	765	5118	13.00/2.5	15.00/2.5	10.30	22950
18.00 - 25	TL	40	-	GCR	517	1665	765	5118	13.00/2.5	15.00/2.5	10.30	22950

PS: Port Special

GCR: Groove Crack Resistant



MAIN APPLICATION:
STRADDLE CARRIER




PORTMAX PM 93

PORTMAX PM 93 has been specially designed for straddle carriers in port container handling operations. It is an All Steel radial tire with multilayer steel belts providing greater load carrying capacity. Its special tread compound ensures a longer tire life. PORTMAX PM 93 offers reduced rolling resistance improving fuel economy.



SIZE	Type	Star rating	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 25 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
25" 16.00 R 25	TL	**	200 A5	IND	425	1515	699	4582	11.25/2.0	-	10	14000

IND: Industrial



MAIN APPLICATION:
TERMINAL TRACTOR



PORTMAX PT 93

Portmax PT 93 is a terminal tractor tire, which has been specifically engineered for heavy-duty operations in terminal environments such as ports and logistic hubs. The special antistatic tread compound ensures excellent wear resistance even under the most demanding operating conditions. Portmax PT 93 offers excellent handling features and outstanding grip along with enhanced durability.



SIZE	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		LOAD CAPACITY 40 KM/H	
									Rec./Flange Height	Alt./Flange Height	bar	max load (kg)
280/75 R 22.5	TL	-	168 A8	IND	282	998	-	-	8.25	9.00	10.00	5600

22.5"

IND: Industrial

READING YOUR TIRE

This section is intended for operators from the agricultural, industrial or earthmoving sectors. It contains useful information about specific Off-Highway tire features as well as some recommendations for maintenance and storage.

The main information about your tire can be found right on the tire. You just need to know how to read it.



1	Brand Name
2	Sub brand name
3	Tire size
4	Type of compound
5	Safety warning
6	Ply rating Load & speed index Load, speed, pressure details
7	Type of tire
8	TRA Code
9	Tire serial code
10	Cord fabric

These are the main parameters for measuring a tire:

Overall Diameter - OD

This parameter is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

Section Width - SW

This parameter indicates the outer sidewall distance without taking into consideration the prominences due to tire code marking. The section width is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

Overall Width - OW

This parameter indicates a tire's section width at its largest point including all prominences such as tire code marking, sidewall lettering, tire brand, etc. The overall width is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

Section Height – SH

This parameter indicates the vertical section of the tire. It is calculated based on the overall diameter less the rim diameter divided by two.

Static Loaded Radius - SLR

This parameter indicates the vertical distance between the ground and the tire rotation axis. It is measured with the tire inflated at its nominal pressure, properly mounted on its reference rim at maximum load according to the values defined in the load index.

Static Loaded Width - SLW


This parameter indicates the outer distance between the tire sidewalls. It is measured with the tire inflated at its nominal pressure, properly mounted on its reference rim at maximum load according to the values defined in the load index.

Load Index

The load index is a numeric code that defines the tire's maximum loading capacity in kg. For each tire type/size, the loading capacity is always related to a specific inflation pressure as defined by ETRTO standards and manufacturer specifications.

Speed Code

The speed code is a symbol that indicates the maximum speed admitted at the given load index, following any other specific conditions defined by the tire manufacturer.

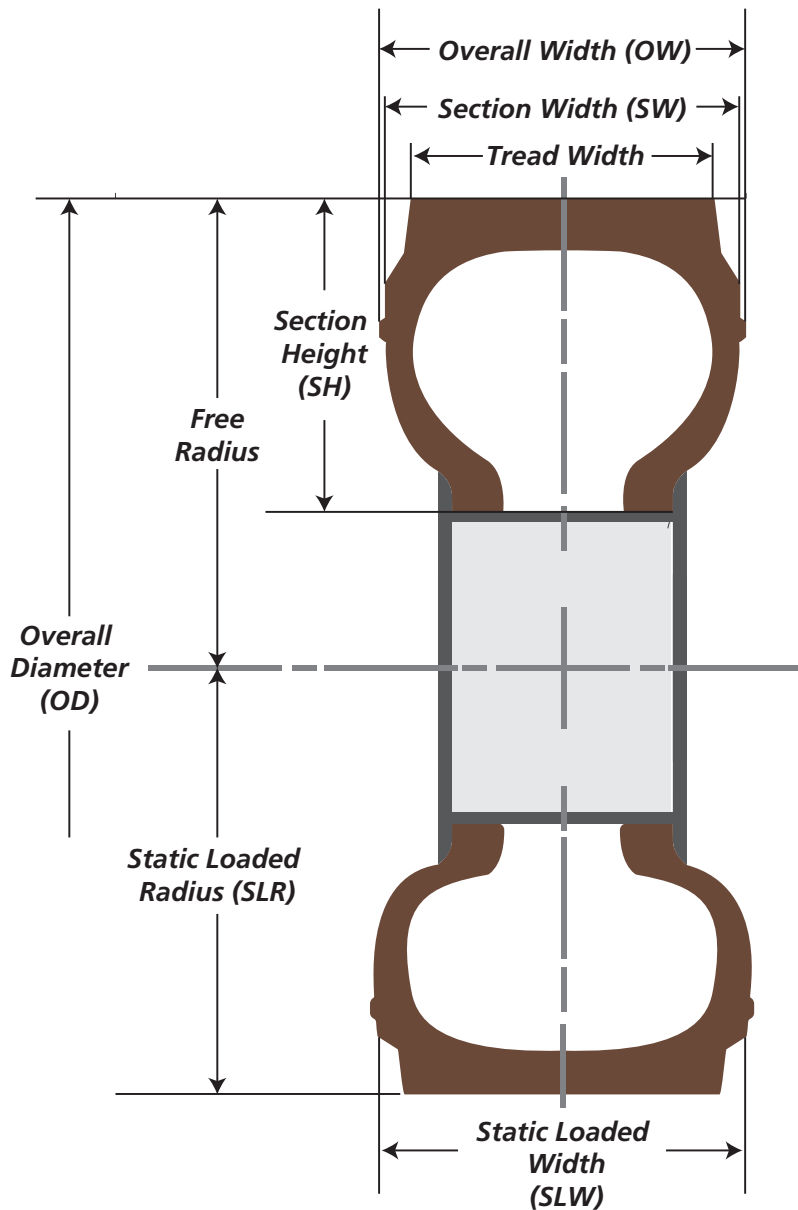

LOAD INDEX

LOAD INDEX	LOAD KG
50	190
51	195
52	200
53	206
54	212
55	218
56	224
57	230
58	236
59	243
60	250
61	257
62	265
63	272
64	280
65	290
66	300
67	307
68	315
69	325
70	335
71	345
72	355
73	365
74	375
75	387
76	400
77	412
78	425
79	437
80	450
81	462
82	475
83	487
84	500
85	515
86	530
87	545
88	560
89	580

LOAD INDEX	LOAD KG
90	600
91	615
92	630
93	650
94	670
95	690
96	710
97	730
98	750
99	775
100	800
101	825
102	850
103	875
104	900
105	925
106	950
107	975
108	1000
109	1030
110	1060
111	1090
112	1120
113	1150
114	1180
115	1215
116	1250
117	1285
118	1320
119	1360
120	1400
121	1450
122	1500
123	1550
124	1600
125	1650
126	1700
127	1750
128	1800
129	1850

LOAD INDEX	LOAD KG
130	1900
131	1950
132	2000
133	2060
134	2120
135	2180
136	2240
137	2300
138	2360
139	2430
140	2500
141	2575
142	2650
143	2725
144	2800
145	2900
146	3000
147	3075
148	3150
149	3250
150	3350
151	3450
152	3550
153	3650
154	3750
155	3875
156	4000
157	4125
158	4250
159	4375
160	4500
161	4625
162	4750
163	4875
164	5000
165	5150
166	5300
167	5450
168	5600

LOAD INDEX	LOAD KG
169	5800
170	6000
171	6150
172	6300
173	6500
174	6700
175	6900
176	7100
177	7300
178	7500
179	7750
180	8000
181	8250
182	8500
183	8750
184	9000
185	9250

LOAD INDEX	LOAD KG
186	9500
187	9750
188	10000
189	10300
190	10600
191	10900
192	11200
193	11500
194	11800
195	12150
196	12500
197	12850
198	13200
199	13600
200	14000
201	14500
202	15000

LOAD INDEX	LOAD KG
203	15500
204	16000
205	16500
206	17000
207	17500
208	18000
209	18500
210	19000
211	19500
212	20000
213	20600
214	21200
215	21800
216	22400
217	23000
218	23600
219	24300

SPEED SYMBOL

SPEED SYMBOL	A 2	A 4	A 6	A 8	B	C	D	E	F	G	J	K
SPEED Km/h	10	20	30	40	50	60	65	70	80	90	100	110

TIRE LIFE & FAILURE

In several operating conditions, especially in agriculture, Off-Highway tires, need increased traction. Liquid ballasting can be useful to achieve major traction and higher adherence on the terrain as well as improved stability (lateral stiffness).

When filling the tire with liquid, it is recommended not to exceed 75% of its volume, in order to leave an air reserve of at least 25% of the tire volume. At any rate, it is important to inflate the tire at the pressure recommended by the manufacturer with reference to the loading conditions in order to maintain specific tire features such as elasticity.

In areas with a harsh climate, it is advised to add anti-freezing agents such as calcium chloride or magnesium chloride. It is highly recommended that these operations are carried out by a professional specialist only.


HANDLING & STORAGE

TIRE TRANSPORTATION


BKT tires are designed for the most differing applications in agriculture and manifold industrial sectors. Many Off-Highway tires are very heavy and difficult to be transported. Wrong transportation of a tire can cause serious damage. When transporting a tire, particular attention must be paid to make sure that neither the bead nor the inner part of the tire are damaged. Even the slightest damage of the bead can cause permanent damage due to air leakage resulting in tire underinflation and possible separation of the tire components.

In order to reduce the risk of damages or problems caused by wrong tire transportation or handling to a minimum, it is highly advised to observe the following recommendations:


- Do not lift the tire with a crane hook by leverage on the bead.
- Use large fibered straps, rubber slings or specific belts.
- Do not use ropes, steel slings or chains.
- Use a forklift for transport. The tire is to be lifted under the tread and not on the bead.




✓ **Correct**



✗ **Incorrect**



✓ **Correct**



✗ **Incorrect**



✓ **Correct**



✗ **Incorrect**


TIRE STORAGE

Whatever your field of application is – agriculture, earthmoving, industry, or else - Off-Highway tires are to be stored in a cool and dry place, away from direct sunlight, electric motors, oils, fuels, resins and other volatile substances in order to avoid any alteration of the chemical-physical features.

Should this not be possible, at least protect your tires with a waterproof tarpaulin to avoid contact with ultra-violet rays and bad weather.

Tires are to be placed vertically side by side. Do not stack one tire over the other horizontally.

Tubes and o-rings must be stocked in their original packing or stored unwrapped on racks or shelves, but never suspended.

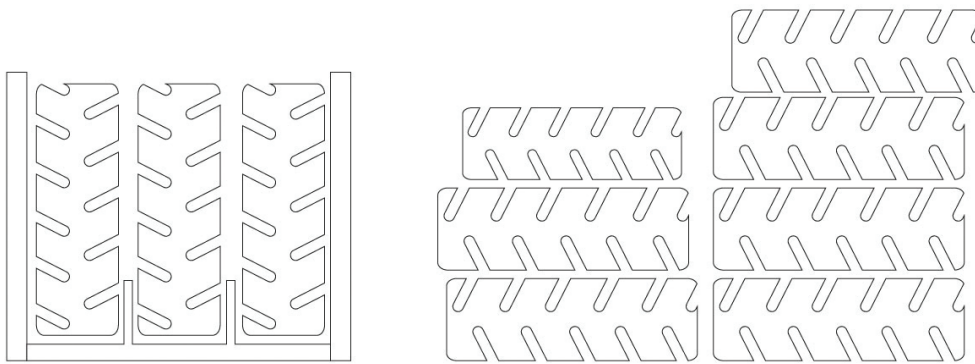

✓ **Correct**

✗ **Incorrect**



Corporate Office

Balkrishna Industries Ltd.

BKT HOUSE, C/15, Trade World, Kamala Mills Compound, Senapati Bapat Marg, Lower Parel, Mumbai - 400013, India
Tel: (+91) 22-6666 3800 - Fax: (+91) 22-6666 3898/99 - e-mail: info@bkt-tires.com - bkt-tires.com

BKT Europe srl

Viale Della Repubblica, 133
20831 Seregno (MB), Italy
Tel: (+39) 0362 33 03 28
(+39) 0362 32 51 07
Fax: (+39) 0362 23 24 72

BKT USA Inc.

2660 West Market St. Suite 100
Fairlawn (Akron) OH 44333, USA
Tel: (+1) 330 836 1090
Fax: (+1) 330 836 1091
Toll Free: (+1) 888 660 0662

BKT TIRES (CANADA) Inc.

55 York Street, Suite 401
Toronto, Ontario M5J 1R7, Canada
Tel: AG/IND (+1) 905 641 5636
OTR (+1) 780 888 5667
Fax: (+1) 416 229 1711